

Excel Cat6 24 Port Screened Patch Panel 1U LSA Punch Down Right Angled Black

Item Code: 100-013

excel
without compromise.



✕ Cat6 Screened Panel

✕ Backwards compatible

✕ Rear cable management

✕ LSA Style Right Angled Termination

✕ Cage nuts and mini cable ties included

✕ T568A/B Wiring Configuration

✕ CIBSE TM65 Embodied Carbon: 29.168 kg CO2e

Product Overview

100-013 Excel Cat6 24 Port Screened Patch Panel 1U LSA Punch Down Right Angled Black, available as part of a range of Cat6 Patch Panels in stock at Mayflex.

Excel Category 6 Screened Patch Panels have been designed to meet or exceed the latest ISO and TIA requirements for category 6 compliance. Ease of installation is assured with built in rear cable management at a 90° angle to the panel facia.

Each panel has a screen printed labelling field positioned above each port, included with the panel is a pre-printed self-adhesive labelling sheet, pre-numbered 1- 96, for fast and easy labelling on site.

Termination can be made using LSA compatible tools, and cable tie bridges are positioned between the IDC blocks to relieve cable stress. Each panel consists of a number of 8-way blocks of RJ45 sockets, housed in a high quality plastic moulding.

Product Specifications

| Feature | Values |
|---------------------------|-----------|
| Number of ports - loaded | 24 |
| Type of connector | RJ45 8(8) |
| Shielded | yes |
| Category | 6 |
| Connection type | LSA |
| Number of rack units (RU) | 1 |

Excel Cat6 24 Port Screened Patch Panel 1U LSA Punch Down Right Angled Black

Item Code: 100-013



| | |
|-----------------|-----------------------------|
| Colour | Black |
| Mounting method | 482.6 mm (19 inch) mounting |
| Height | 44 mm |
| Width | 479 mm |
| Depth | 102.5 mm |

Additional specifications


| Features | Values |
|----------------------------------|---|
| Wiring Specification | T568A/T568B |
| RJ45 Jack Min life expectancy | 750 insertions |
| RJ45 Jack contact | 50 microinch gold over 100 microinch nickel undercoat |
| IDC Contacts Max life expectancy | 200 terminations |
| Contact compatibility | 22 to 24 AWG |
| Operating Temperature Range | -10°C to 60°C |
| Storage Temperature Range | -40°C to 68°C |
| Relative Humidity | 10% to 90% |
| Panel material | SPCC |
| Jack housing material | PBT, 30% glass fiber filled |
| IDC material | Phosphor bronze, tin over nickel undercoat |

Excel Cat6 24 Port Screened Patch Panel 1U LSA Punch Down Right Angled Black

Item Code: 100-013



Product drawing

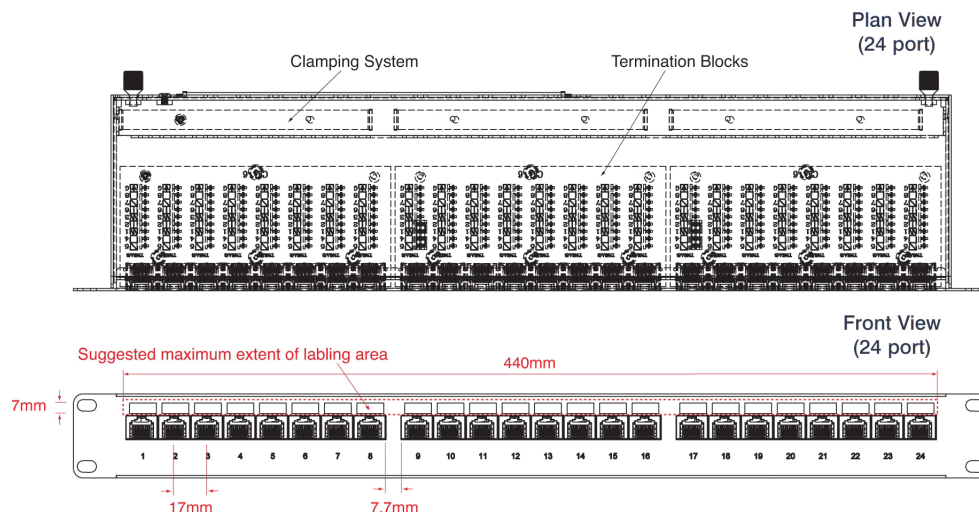

Standards

| Applicable standard | Detail |
|--|--|
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| IEC 61156-5:2009+AMD1:2012 CSV | Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification |
| EN 50173-1:2018 | Information technology. Generic cabling systems - General requirements |
| EN 50173-2:2007 + A1:2010 | Information technology. Generic cabling systems - Office premises |
| ANSI/TIA 568-2.D | Balanced Twisted-Pair Telecommunications Cabling and Components Standards |
| ANSI/EIA-310-E | Electronic Industries Association standard for horizontal spacing, vertical hole spacing, rack opening and front panel width |
| RoHS-II/-III (2011/65/EU & 2015/863): 2023 | Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III). |
| WFD: 2023 | Compliant to Waste Framework Directive |
| SCIP: 2023 | Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products) |
| POPs (EU) No 2019/1021 | EU Regulation for the restriction of Persistent Organic |

Excel Cat6 24 Port Screened Patch Panel 1U LSA Punch Down Right Angled Black

Item Code: 100-013



Pollutants.

Part Number Table

| Part Number | Description |
|-------------|--|
| 100-013 | Excel Cat6 24 Port Screened Patch Panel 1U LSA Punch Down Right Angled Black |

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.