



✗ Cat5e solid copper cable

✗ U/UTP no overall screening

✗ No conductor screening

✗ Outer sheath colour: grey

✗ Reaction-to-fire class according to EN 13501-6: Eca

✗ 24 AWG size conductors

✗ CIBSE TM65 Embodied Carbon: 52.681 kg CO2e

Product Overview

Excel solid Cat5e ethernet cable U/UTP PVC CPR Euroclass Eca are manufactured and tested to ISO 11801, EN 50173 and ANSI/TIA-568-C Cat5e specifications, 305 m or 500 m. Each cable consists of 8 colour coded solid copper polyethylene insulated conductors twisted together to form four pairs.


The whole cable is produced in a PVC sheath which is metre marked and labelled with part code and DoP information.

Product Specifications

Feature	Values
Conductor surface	Bare
AWG size	24
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Specification core insulation	Polyethylene (PE)
Core identification	Colour
Overall screening	None

Conductor screening	None
Outer sheath material	Polyvinyl chloride (PVC)
Outer sheath colour	Grey
Flame retardant according to IEC 60332-1-2	yes
Reaction-to-fire class according to EN 13501-6	Eca
Outer diameter approx.	5.2 mm
Operating Temperature Range	-10...75 °C
Category	5E
NVP value	70 %

Cross-section diagram

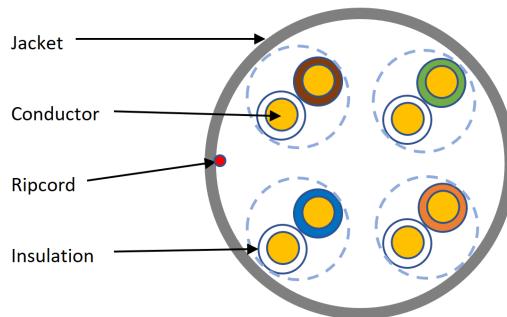

Cable specifications

Features	Values
Dielectric strength	1200 V dc or 850 V ac
Maximum Pulling Load	60N/6.1KgF
MBR during installation	8x cable OD
MBR installed	4x cable OD
Ripcord	Nylon

Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2020	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2018	Information technology. Generic cabling systems - Office premises
BS EN 50288-3-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004 + A12:2020	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-D:2015	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2014	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions – Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

Excel Solid Cat5e Cable U/UTP PVC Euroclass Eca
305 m Box Grey

Item Code: 100-065



Part Number Table

Part Number	Description
100-065	Excel Solid Cat5e Cable U/UTP PVC Euroclass Eca 305 m Box Grey
100-065-1000	Excel Solid Cat5e Cable U/UTP PVC Euroclass Eca 1000 m Box Grey

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.

