


Excel Solid Cat5e Cable U/UTP PVC Euroclass Eca 305 m Box Grey

Item Code: 100-065

excel
without compromise.

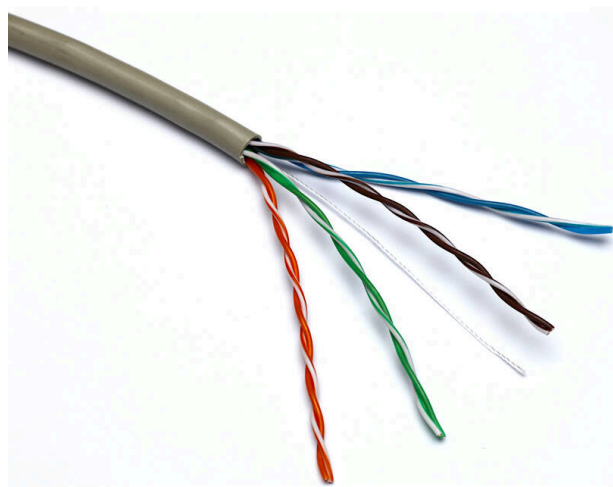

Cat5e solid copper cable

U/UTP no overall screening

No conductor screening

Outer sheath colour: grey

Reaction-to-fire class according to EN 13501-6: Eca

24 AWG size conductors

CIBSE TM65 Embodied Carbon: 52.681 kg CO2e

Product Overview

Excel solid Cat5e ethernet cable U/UTP PVC CPR Euroclass Eca are manufactured and tested to ISO 11801, EN 50173 and ANSI/TIA-568-C Cat5e specifications, 305 m or 500 m. Each cable consists of 8 colour coded solid copper polyethylene insulated conductors twisted together to form four pairs.


The whole cable is produced in a PVC sheath which is metre marked and labelled with part code and DoP information.

Product Specifications

| Feature | Values |
|-------------------------------|-------------------|
| Conductor surface | Bare |
| AWG size | 24 |
| Conductor category | Class 1 = solid |
| Total number of cores | 8 |
| Stranding element | Pairs |
| Specification core insulation | Polyethylene (PE) |
| Core identification | Colour |

| | |
|--|--------------------------|
| Overall screening | None |
| Conductor screening | None |
| Outer sheath material | Polyvinyl chloride (PVC) |
| Outer sheath colour | Grey |
| Flame retardant according to IEC 60332-1-2 | yes |
| Reaction-to-fire class according to EN 13501-6 | Eca |
| Outer diameter approx. | 5.2 mm |
| Operating Temperature Range | -10...75 °C |
| Category | 5E |
| NVP value | 70 % |

Cross-section diagram

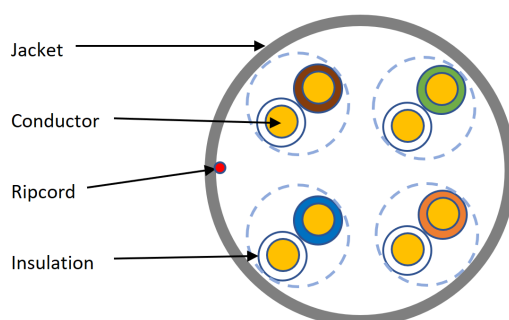

Cable specifications

| Features | Values |
|-------------------------|-------------|
| Maximum Pulling Load | 60N/6.1KgF |
| MBR during installation | 8x cable OD |
| MBR installed | 4x cable OD |
| Ripcord | Nylon |

Standards

| Applicable standard | Subject |
|------------------------------------|--|
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| IEC 61156-5:2020 | Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification |
| EN 50173-1:2018 | Information technology. Generic cabling systems - General requirements |
| EN 50173-2:2018 | Information technology. Generic cabling systems - Office premises |
| BS EN 50288-3-1:2013 | Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz |
| EN 50399:2011+A1:2016 | Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results |
| IEC 60332-1-2:2004 + A12:2020 | Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame |
| ANSI/TIA 568-D:2015 | Balanced Twisted-Pair Telecommunications Cabling and Components Standards |
| IEC 60754-2:2014 | Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity |
| IEC 61034-2:2005+A2:2020 | Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements |
| EN 50575:2014 + A1:2016 | Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements |
| Directive 2011/65/EU (RoHS II) | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states). |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant. |
| Directive 2008/98/EC (WFD) | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988). |
| ECHA SCIP Database | Compliant; product does not contain SVHCs (Substances |

of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.

Regulation (EU) 2019/1021 (POPs)

EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).

UK SI 2012 No. 3032

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Part Number Table

| Part Number | Description |
|--------------|---|
| 100-065 | Excel Solid Cat5e Cable U/UTP PVC Euroclass Eca 305 m Box Grey |
| 100-065-1000 | Excel Solid Cat5e Cable U/UTP PVC Euroclass Eca 1000 m Box Grey |

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com