


# Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Grey

excel  
without compromise.

Part Code: 100-081-305M

sales@excel-networking.com  
excel-networking.com

CIBSE TM65 Embodied Carbon: 55.177 kg CO2e

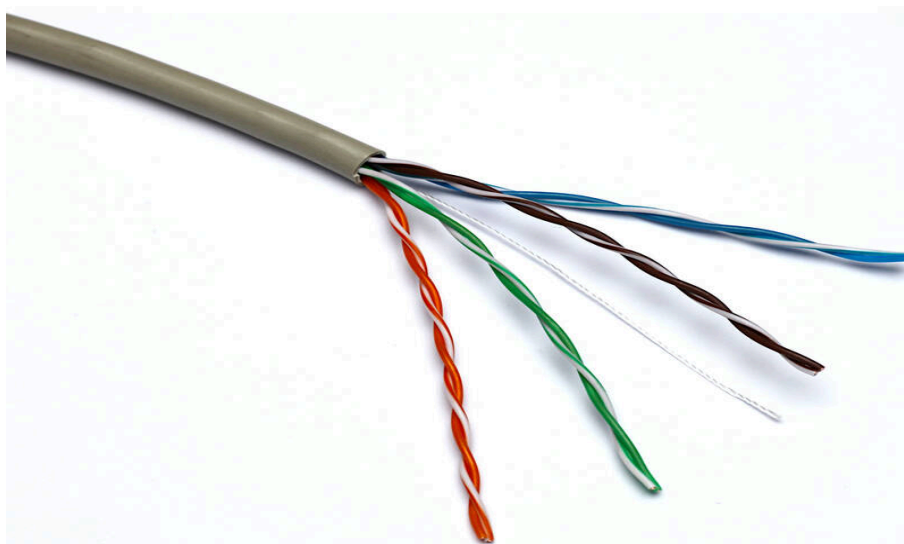

## Main Features

- / Cat5e Patch Lead Cable
- / U/UTP No Overall Screening
- / No Conductor Screening
- / Outer sheath colour Grey
- / 24 AWG size conductors
- / Specification core insulation PE

## Product Overview

Excel Cat5e ethernet patch lead cable U/UTP PVC are manufactured and tested to ISO 11801, EN 50173 and ANSI/TIA-568-C Cat5e specifications, 305 m boxes. Each cable consists of 8 colour coded stranded copper conductors twisted together to form four pairs. The whole cable is produced in a PVC sheath and is highly flexible and easy to use.

The cable is available in many colours allowing bespoke patch leads to be made using appropriate plugs.

## Product Specifications

# Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Grey

Part Code: 100-081-305M

sales@excel-networking.com  
excel-networking.com


Feature	Values
Cable type	<b>U/UTP</b>
Conductor material	<b>Copper</b>
Conductor surface	<b>Bare</b>
AWG size	<b>24</b>
Conductor category	<b>Class 2 = stranded</b>
Total number of cores	<b>8</b>
Stranding element	<b>Pairs</b>
Specification core insulation	<b>Polyethylene (PE)</b>
Core identification	<b>Colour</b>
Overall screening	<b>None</b>
Conductor screening	<b>None</b>
Outer sheath material	<b>Polyvinyl chloride (PVC)</b>
Outer sheath colour	<b>Grey</b>
Flame retardant according to IEC 60332-1-2	<b>yes</b>
Outer diameter approx.	<b>5.3 mm</b>
Category	<b>5E</b>

# Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Grey

Part Code: 100-081-305M

sales@excel-networking.com  
excel-networking.com

## Cross-section diagram

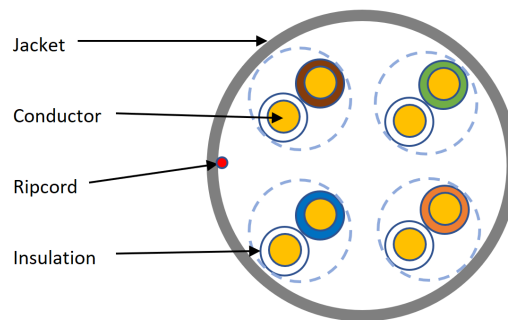

## Cable specifications

Features	Values
Maximum Pulling Load	60N/6.1KgF
MBR during installation	8x cable OD
MBR installed	4x cable OD
Ripcord	Nylon

## Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2020	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz -

# Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Grey

Part Code: 100-081-305M

sales@excel-networking.com  
excel-networking.com

	Horizontal floor wiring - Sectional specification
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2018	Information technology. Generic cabling systems - Office premises
BS EN 50288-3-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unshielded cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004 + A12:2020	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-D:2015	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2014	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances

# Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Grey

Part Code: 100-081-305M

sales@excel-networking.com  
excel-networking.com

of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.

Regulation (EU) 2019/1021 (POPs)

EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).

UK SI 2012 No. 3032

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

## Part Code Table

Part Code	Description
100-081-305M	<b>Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Grey</b>
100-082-305M	<b>Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Blue</b>
100-083-305M	<b>Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Green</b>
100-084-305M	<b>Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Black</b>
100-089-305M	<b>Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads White</b>
100-091-305M	<b>Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Yellow</b>