

# Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads White

Part Code: 100-089-305M

sales@excel-networking.com  
excel-networking.com

CIBSE TM65 Embodied Carbon: 55.177 kg CO2e



## Main Features

- / Cat5e Patch Lead Cable
- / U/UTP No Overall Screening
- / No Conductor Screening
- / Outer sheath colour White
- / 24 AWG size conductors
- / Specification core insulation PE

## Product Overview

Excel Cat5e ethernet patch lead cable U/UTP PVC are manufactured and tested to ISO 11801, EN 50173 and ANSI/TIA-568-C Cat 5e specifications, 305m boxes. Each cable consists of 8 colour coded stranded copper conductors twisted together to form four pairs. The whole cable is produced in a PVC sheath and is highly flexible and easy to use.

The cable is available in many colours allowing bespoke patch leads to be made using appropriate plugs.

## Product Specifications

# Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads White

Part Code: 100-089-305M

sales@excel-networking.com  
excel-networking.com


| Feature                                    | Values                          |
|--|---------------------------------|
| Cable type                                 | <b>U/UTP</b>                    |
| Conductor material                         | <b>Copper</b>                   |
| Conductor surface                          | <b>Bare</b>                     |
| AWG size                                   | <b>24</b>                       |
| Conductor category                         | <b>Class 2 = stranded</b>       |
| Total number of cores                      | <b>8</b>                        |
| Stranding element                          | <b>Pairs</b>                    |
| Specification core insulation              | <b>Polyethylene (PE)</b>        |
| Core identification                        | <b>Colour</b>                   |
| Overall screening                          | <b>None</b>                     |
| Conductor screening                        | <b>None</b>                     |
| Outer sheath material                      | <b>Polyvinyl chloride (PVC)</b> |
| Outer sheath colour                        | <b>White</b>                    |
| Flame retardant according to IEC 60332-1-2 | <b>yes</b>                      |
| Outer diameter approx.                     | <b>5.3 mm</b>                   |
| Category                                   | <b>5E</b>                       |

# Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads White

Part Code: 100-089-305M

sales@excel-networking.com  
excel-networking.com

## Cross-section diagram

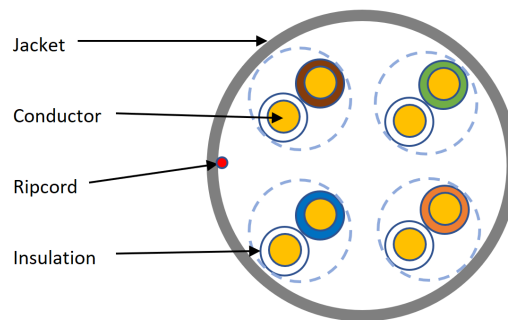

## Cable specifications

| Features                | Values      |
|-------------------------|-------------|
| Maximum Pulling Load    | 60N/6.1KgF  |
| MBR during installation | 8x cable OD |
| MBR installed           | 4x cable OD |
| Ripcord                 | Nylon       |

## Standards

| Applicable standard  | Subject  |
|----------------------|--|
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements  |
| IEC 61156-5:2020     | Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - |

# Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads White

Part Code: 100-089-305M

sales@excel-networking.com  
excel-networking.com

|                                    |  |
|------------------------------------|--|
|                                    | Horizontal floor wiring - Sectional specification  |
| EN 50173-1:2018                    | Information technology. Generic cabling systems - General requirements   |
| EN 50173-2:2018                    | Information technology. Generic cabling systems - Office premises  |
| BS EN 50288-3-1:2013               | Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unshielded cables characterised up to 250 MHz                |
| EN 50399:2011+A1:2016              | Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results    |
| IEC 60332-1-2:2004 + A12:2020      | Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame |
| ANSI/TIA 568-D:2015                | Balanced Twisted-Pair Telecommunications Cabling and Components Standards  |
| IEC 60754-2:2014                   | Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity                                       |
| IEC 61034-2:2005+A2:2020           | Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements  |
| EN 50575:2014 + A1:2016            | Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements                                       |
| Directive 2011/65/EU (RoHS II)     | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).                                   |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.   |
| Directive 2008/98/EC (WFD)         | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).   |
| ECHA SCIP Database                 | Compliant; product does not contain SVHCs (Substances  |

# Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads White

Part Code: 100-089-305M

sales@excel-networking.com  
excel-networking.com

of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.

Regulation (EU) 2019/1021 (POPs)

EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).

UK SI 2012 No. 3032

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

## Part Code Table

| Part Code    | Description   |
|--------------|---|
| 100-081-305M | <b>Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Grey</b>   |
| 100-082-305M | <b>Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Blue</b>   |
| 100-083-305M | <b>Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Green</b>  |
| 100-084-305M | <b>Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Black</b>  |
| 100-089-305M | <b>Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads White</b>  |
| 100-091-305M | <b>Excel Patch Cable Cat5e U/UTP PVC 305 m Box for Patch Leads Yellow</b> |