Excel Cat6 UTP Unscreened Low Profile Keystone Jack Toolless Black Nordic Market

Part Code: 100-208-BK

sales@excel-networking.com
excel-networking.com

CIBSE TM65 Embodied Carbon: 0.383 kg CO2e





Main Features

- / Nordic market specific
- / Low profile design - 28 mm overall depth
- / Supports Gigabit Ethernet
- / Toolless termination design
- / UL94V-0 fire retardant plastic
- / ISO, EN & TIA compliant

Product Overview

Excel Cat6 UTP Unscreened Low Profile Keystone Jack Toolless Black Nordic market, available as part of our range of excel Cat6 keystone jacks for RJ45 network connections.
The Excel Category 6 Low Profile Unscreened Keystone Jack is a reduced size toolless termination RJ45 socket. The reduced size allows for multiple cable entry directions to be accommodated when this jack is mounted in a standard depth back box. This permits many mounting options including flush shutters at the outlet as well as more common angled shutter used with keystone jacks.
The low profile design allows this jack to fit in the Excel 0.5U 24 Port Patch Panel resulting in a maximum port density of 48 per 1U.

The socket itself is housed in a high quality fire retardant plastic cast housing, which opens at the rear in a butterfly manner to reveal the IDC termination points. Once the pairs are arranged in the cable management cap and trimmed it is a simple case of closing the 'butterfly' together to complete the termination.

This data sheet was generated at 5:07pm 10th November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

Third party verification by Delta assures this high performance jack exceeds the requirements of the ISO, EN & TIA component standards.

Product Specifications

Feature	Values
Model	**Jack**
Type of connector	**RJ45 8(8)**
Shielded	**no**
Category	**6**
Requires termination tool	**no**
Suitable for round cable	**yes**
Suitable for flat cable	**no**
Suitable for solid cores	**yes**
Colour	**Black**


Additional specifications

Features	Values
Width	**16.2mm**
Depth	**28.3mm**
Hight	**21.5mm**
Housing	**UL94V-0 Fire retardant plastic**
RJ45 Contacts	**Nickel plated phosphor bronze alloy with 50 micro-inch Gold plating**
IDC Contacts	**Tin plated phosphor bronze alloy**

This data sheet was generated at 5:07pm 10th November 2026 and is subject to change at any time.

RJ45 Life	**Minimum 750 insertions**
Storage temperature	**-40 to +70°C**
Operating temperature	**-10 to +60°C**

Product drawing

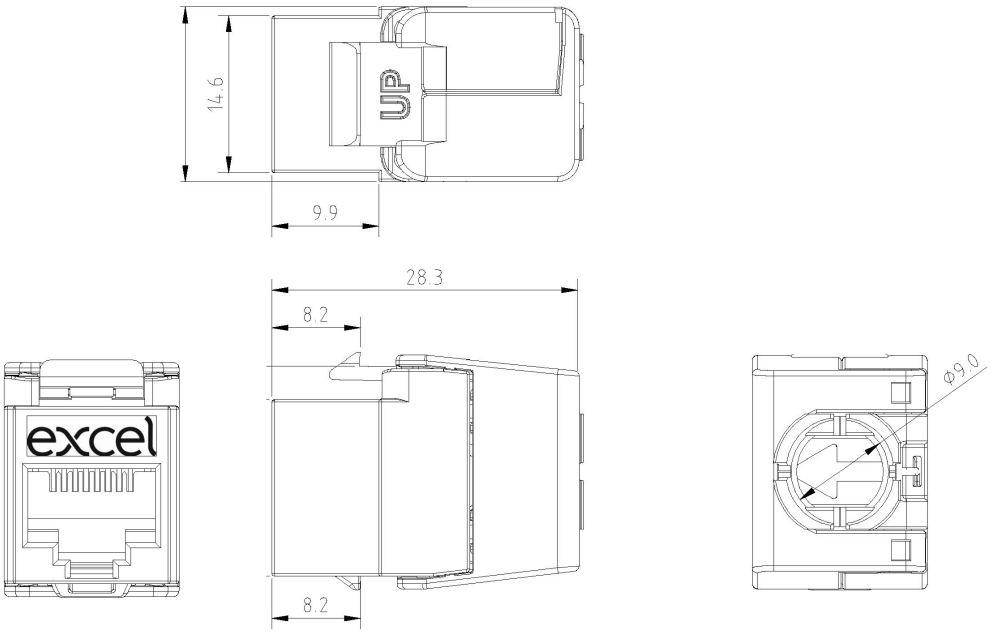

Included accessories

Accessories	Singles	24-packs
Wiring cap	**1**	**24**

This data sheet was generated at 5:07pm 10th November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

Standards

Applicable standard	Detail
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
UL-94-V-0	Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. NO flaming drips are allowed.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

This data sheet was generated at 5:07pm 10th November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

Part Code Table

Part Code	Description
100-208-BK	**Excel Cat6 UTP Unscreened Low Profile Keystone Jack Toolless Black Nordic Market**
100-208-BK-24	**Excel Cat6 UTP Unscreened Low Profile Keystone Jack Toolless Black Nordic Market (Box 24)**
100-208-WT	**Excel Cat6 UTP Unscreened Low Profile Keystone Jack Toolless White Nordic Market**
100-208-WT-24	**Excel Cat6 UTP Unscreened Low Profile Keystone Jack Toolless White Nordic Market (Box 24)**

This data sheet was generated at 5:07pm 10th November 2026 and is subject to change at any time.