Excel Cat6 UTP Unscreened Keystone Jack Toolless White

Item Code: 100-211

- IDC point at 180 degrees to jack
- Toolless termination design
- Delta 3rd party verified
- UL94V-0 fire retardant plastic
- Supports Gigabit Ethernet
- ISO, EN & TIA compliant
- CIBSE TM65 Embodied Carbon: 0.264 kg CO2e

Product Overview

Excel Cat6 UTP Unscreened Keystone Jack Toolless White, available as part of our range of excel Cat6 keystone jacks for RJ45 network connections.
A toolless termination RJ45 socket suitable for mounting in a range of housings from patch panels, faceplates and shutters to sub-floor boxes and distribution enclosures. The socket is manufactured in a high quality ABS housing, with butterfly style Toolless IDC termination points.

Once the pairs are arranged in the cable management cap and trimmed it is a simple case of closing the ?butterfly? together to complete the termination.

Third party verification by Delta assures this high performance jack exceeds the requirements of the ISO, EN & TIA component standards.

Product Specifications

Feature	Values
Model	Jack
Type of connector	RJ45 8(8)
Shielded	no
Category	6
Requires termination tool	no

Suitable for round cable	yes
Suitable for flat cable	no
Suitable for solid cores	yes
Colour	White

Additional specifications

Features	Values
Width	17mm
Depth	35.1mm
Height	25.20mm
Housing	ABS High-Impact
RJ45 Contacts	Nickel plated phosphor bronze alloy with 50 micro-inch Gold plating
IDC Contacts	Tin plated phosphor bronze alloy
RJ45 Life	Minimum 750 insertions
Storage temprature	-40 to +70°C
Operating temprature	-10 to +60°C

Product drawing

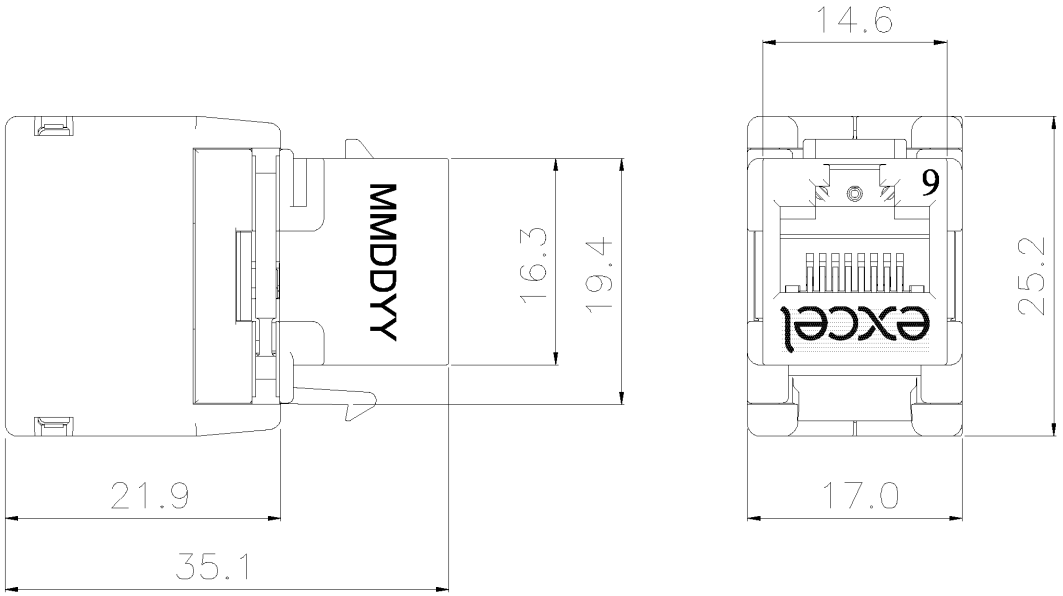

Included accessories

Accessories	Singles	24-packs
Nylon cable tie	1	24
Wiring cap	1	24

Standards

Applicable standard	Detail
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
UL-94-V-0	Burning stops within 10 seconds after two applications of

	ten seconds each of a flame to a test bar. NO flaming drips are allowed.
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

Part Number Table

Part Number	Description
100-211	Excel Cat6 UTP Unscreened Keystone Jack Toolless White
100-211-24	Excel Cat6 UTP Unscreened Keystone Jack Toolless White (Box 24)
100-212	Excel Cat6 UTP Unscreened Keystone Jack Toolless Black
100-212-24	Excel Cat6 UTP Unscreened Keystone Jack Toolless Black (Box 24)

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.