

# Excel Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Right Angled Black

excel  
without compromise.

Part Code: 100-302

sales@excel-networking.com  
excel-networking.com

CIBSE TM65 Embodied Carbon: 28.388 kg CO2e



## Main Features

- / Available in 24 or 48 ports
- / Rear cable management
- / Cage nuts and mini cable ties included
- / Backwards compatible
- / LSA Style Right Angled Termination
- / T568A/B Wiring Configuration

## Product Overview

Excel Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Right Angled Black, available as part of a range of Cat6 Patch Panels in stock at Mayflex.

Excel Category 6 Unscreened Patch Panels have been designed to meet or exceed the latest ISO and TIA requirements for category 6 compliance. Ease of installation is assured with built in rear cable management at a 90° angle to the panel facia.

Each panel has a screen printed labelling field positioned above each port, included with the panel is a pre-printed self-adhesive labelling sheet, pre-numbered 1- 96, for fast and easy labelling on site.

Termination can be made using LSA compatible tools, and cable tie bridges are positioned between the IDC blocks to relieve cable stress.

# Excel Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Right Angled Black

Part Code: 100-302

sales@excel-networking.com  
excel-networking.com

## Product Specifications

| Feature                   | Values                      |
|---------------------------|-----------------------------|
| Number of ports – loaded  | 24                          |
| Type of connector         | RJ45 8(8)                   |
| Shielded                  | no                          |
| Category                  | 6                           |
| Connection type           | LSA                         |
| Number of rack units (RU) | 1                           |
| Colour                    | Black                       |
| Mounting method           | 482.6 mm (19 inch) mounting |
| Height                    | 44 mm                       |
| Width                     | 480 mm                      |
| Depth                     | 96 mm                       |

## Additional specifications

| Features                         | Values  |
|----------------------------------|---|
| Wiring Specification             | T568A/T568B   |
| RJ45 Jack Min life expectancy    | 750 insertions  |
| RJ45 Jack contact                | 50 microinch gold over 100 microinch nickel undercoat |
| IDC Contacts Max life expectancy | 200 terminations                                      |
| Contact compatibility            | 22 to 26AWG   |
| Operating Temperature Range      | -10° to 60°C  |
| Storage Temperature Range        | -40° to 68°C  |


# Excel Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Right Angled Black

Part Code: 100-302

sales@excel-networking.com  
excel-networking.com

|                       |  |
|-----------------------|--|
| Relative Humidity     | 10% to 90%                                 |
| Panel material        | SPCC                                       |
| Jack housing material | PBT, 30% glass fiber filled                |
| IDC material          | Phosphor bronze, tin over nickel undercoat |

## Product drawing

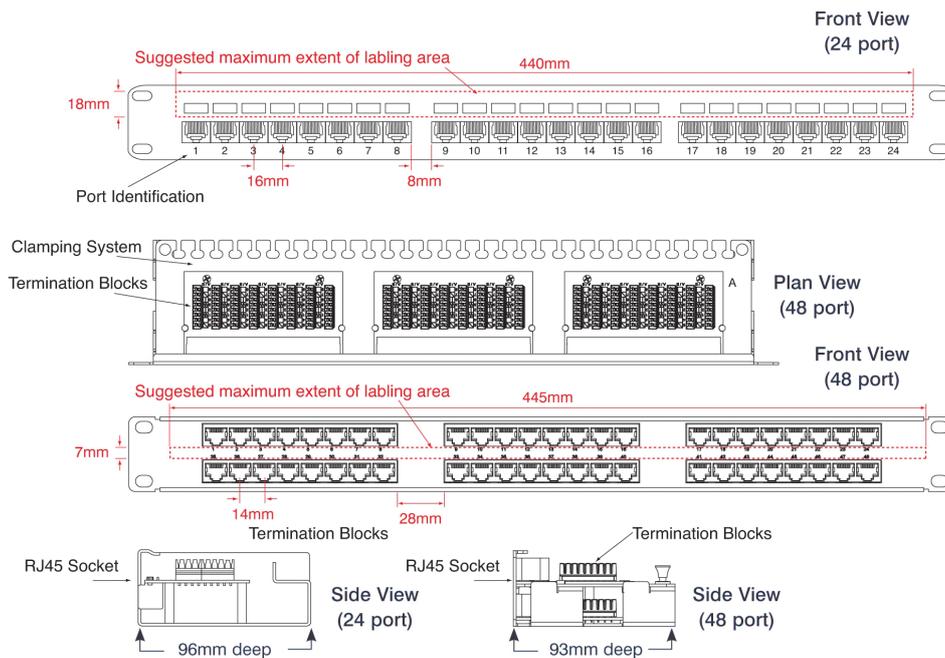

## Standards

| Applicable standard            | Detail   |
|--------------------------------|--|
| ISO/IEC 11801-1:2017           | Information technology - Generic cabling for customer premises: Part 1 General Requirements  |
| IEC 61156-5:2009+AMD1:2012 CSV | Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - |

# Excel Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Right Angled Black

Part Code: 100-302

sales@excel-networking.com  
excel-networking.com

|                                    |  |
|------------------------------------|--|
|                                    | Horizontal floor wiring - Sectional specification  |
| EN 50173-1:2018                    | Information technology. Generic cabling systems - General requirements   |
| EN 50173-2:2007 + A1:2010          | Information technology. Generic cabling systems - Office premises  |
| ANSI/TIA 568-2.D                   | Balanced Twisted-Pair Telecommunications Cabling and Components Standards  |
| ANSI/EIA-310-E                     | Electronic Industries Association standard for horizontal spacing, vertical hole spacing, rack opening and front panel width   |
| Directive 2011/65/EU (RoHS II)     | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).   |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.   |
| Directive 2008/98/EC (WFD)         | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).   |
| ECHA SCIP Database                 | Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.  |
| Regulation (EU) 2019/1021 (POPs)   | EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).   |
| UKSI 2012 No. 3032                 | The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019. |

# Excel Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Right Angled Black

Part Code: 100-302

sales@excel-networking.com  
excel-networking.com

## Part Code Table

| Part Code | Description  |
|-----------|--|
| 100-302   | Excel Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Right Angled Black |
| 100-394   | Excel Cat6 48 Port Unscreened Patch Panel 1U LSA Punch Down Right Angled Black |