Excel Cat6 Solid Patch Lead U/UTP Unshielded LSOH Blade Booted 10 m Violet

Part Code: 100-367

sales@excel-networking.com
excel-networking.com



Main Features

/ Solid core cable - ideal for switch links

/ Backwards compatible

/ T568B wiring

/ Category 6

/ Independently verified

/ Blade style 'slimline' moulded strain relief boot with clip protector

Product Overview

Excel Category 6 U/UTP Solid Core patch leads are manufactured and tested to ISO 11801, EN 50173 & TIA/EIA 568 requirements for patch cord assemblies and provide optimum performance levels for structured cabling installations.

Product Specifications

Feature	Values

This data sheet was generated at 2:12pm 7th November 2026 and is subject to change at any time.

Excel Cat6 Solid Patch Lead U/UTP Unshielded LSOH Blade Booted 10 m Violet


Part Code: 100-367

sales@excel-networking.com
excel-networking.com

Cable type	**U/UTP**
Category	**6**
Length	**10 m**
Type of connector connection 1	**RJ45 8(8)**
Type of connector connection 2	**RJ45 8(8)**
Outer sheath colour	**Violet**
Strain relief boot	**Moulded-on**
Lockable	**no**
Strain relief boot colour	**Violet**
Flame retardant version	**yes**
Cable construction	**1x4**
AWG-size	**23**
Pin assignment	**1:1**

This data sheet was generated at 2:12pm 7th November 2026 and is subject to change at any time.

Product drawing

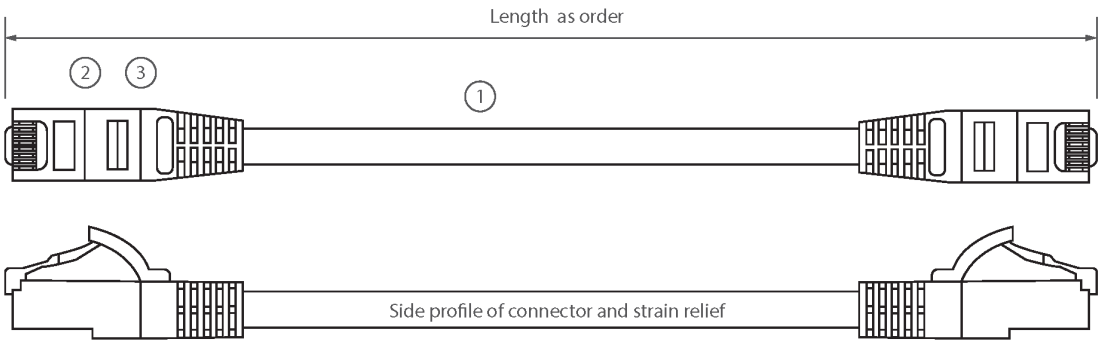

1. 4 pair individually unscreened LS0H cable
2. RJ45 connector with 50µm gold plated staggered pins
3. Slimline blade style strain relief boot

Standards

Applicable standard	Detail
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
EN 50173-1:2011	Information technology. Generic cabling systems - General requirements
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for

This data sheet was generated at 2:12pm 7th November 2026 and is subject to change at any time.

	general applications in construction works subject to reaction to fire requirements
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under defined conditions – Part 2: Test procedure and requirements

Part Code Table

Part Code	Description
100-367	**Excel Cat6 Solid Patch Lead U/UTP Unshielded LSOH Blade Booted 10 m Violet**
100-368	**Excel Cat6 Solid Patch Lead U/UTP Unshielded LSOH Blade Booted 15 m Violet**
100-369	**Excel Cat6 Solid Patch Lead U/UTP Unshielded LSOH Blade Booted 20 m Violet**
100-370	**Excel Cat6 Solid Patch Lead U/UTP Unshielded LSOH Blade Booted 30 m Violet**
190-367	**Excel Cat6 Solid Patch Lead U/UTP Unshielded LS0H B2ca Blade Booted 10m Violet**
190-368	**Excel Cat6 Solid Patch Lead U/UTP Unshielded LS0H B2ca Blade Booted 15m Violet**
190-369	**Excel Cat6 Solid Patch Lead U/UTP Unshielded LS0H B2ca Blade Booted 20m Violet**
190-370	**Excel Cat6 Solid Patch Lead U/UTP Unshielded LS0H B2ca Blade Booted 30m Violet**

This data sheet was generated at 2:12pm 7th November 2026 and is subject to change at any time.