

# Excel Plus Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Black

excel  
without compromise.

Part Code: 100-372

sales@excel-networking.com  
excel-networking.com

CIBSE TM65 Embodied Carbon: 18.204 kg CO2e



## Main Features

- / Available in 24 or 48 ports
- / Backwards compatible
- / Rear cable management
- / LSA Style Termination Blocks
- / Cage nuts and mini cable ties included
- / T568A/B Wiring Configuration

## Product Overview

Excel Plus Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Black, available as part of a range of Cat6 Patch Panels in stock at Mayflex. The Excel Plus Category 6 Unscreened Twisted Pair Patch Panels are available in 24 & 48 Port versions to accommodate installation requirements. Each panel consists of a number of 8 way blocks of RJ45 sockets, housed in a high quality plastic moulding. To the front of the panel this moulding contains the new easy to use slide label system. Each block of 8 sockets has its own label which can be removed from either side of the covered label field. The label strip itself is protected by a clear, tough plastic insert. Termination can be made using LSA compatible tooling, cable tie bridges are positioned between the IDC blocks to relieve cable stress. Installation can be further enhanced by use of the optional...

# Excel Plus Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Black

Part Code: 100-372

sales@excel-networking.com  
excel-networking.com

## Product Specifications

Feature	Values
Number of ports – loaded	24
Type of connector	RJ45 8(8)
Shielded	no
Category	6
Connection type	LSA
Number of rack units (RU)	1
Colour	Black
Mounting method	482.6 mm (19 inch) mounting
Height	44 mm
Width	482 mm
Depth	29.7 mm

## Additional specifications

Features	Values
Wiring Specification	T568A/T568B
RJ45 Jack Min life expectancy	750 insertions
RJ45 Jack contact	50 microinch gold over 100 microinch nickel undercoat
IDC Contacts Max life expectancy	200 terminations
Contact compatibility	22 to 24 AWG
Operating Temperature Range	-10°C to 60°C
Storage Temperature Range	-40°C to 68°C


# Excel Plus Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Black

Part Code: 100-372

sales@excel-networking.com  
excel-networking.com

Relative Humidity	10% to 90%
Panel material	SPCC
Frame material	ABS
Jack housing material	PBT, 30% glass fiber filled
IDC material	Phosphor bronze, tin over nickel undercoat

## Product drawing

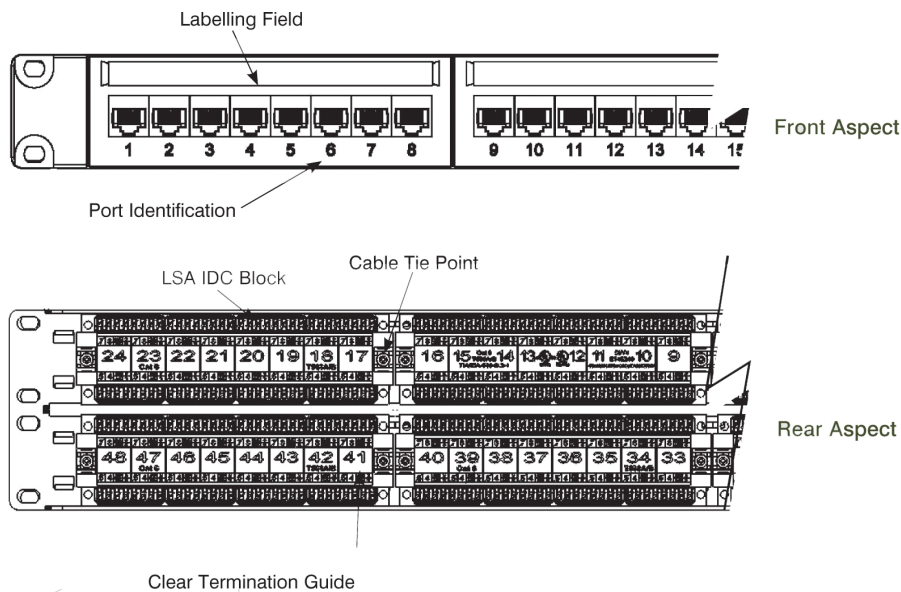

## Standards

Applicable standard	Detail
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz -

# Excel Plus Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Black

Part Code: 100-372

sales@excel-networking.com  
excel-networking.com

	Horizontal floor wiring - Sectional specification
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
ANSI/EIA-310-E	Electronic Industries Association standard for horizontal spacing, vertical hole spacing, rack opening and front panel width
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UKSI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

# Excel Plus Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Black



**Part Code: 100-372**

[sales@excel-networking.com](mailto:sales@excel-networking.com)  
[excel-networking.com](http://excel-networking.com)

## Part Code Table

Part Code	Description
100-372	Excel Plus Cat6 24 Port Unscreened Patch Panel 1U LSA Punch Down Black
100-380	Excel Plus Cat6 48 Port Unscreened Patch Panel 2U LSA Punch Down Black