
Excel Single Gang 4-Port Keystone Flat Faceplate

Part Code: 100-705

sales@excel-networking.com
excel-networking.com

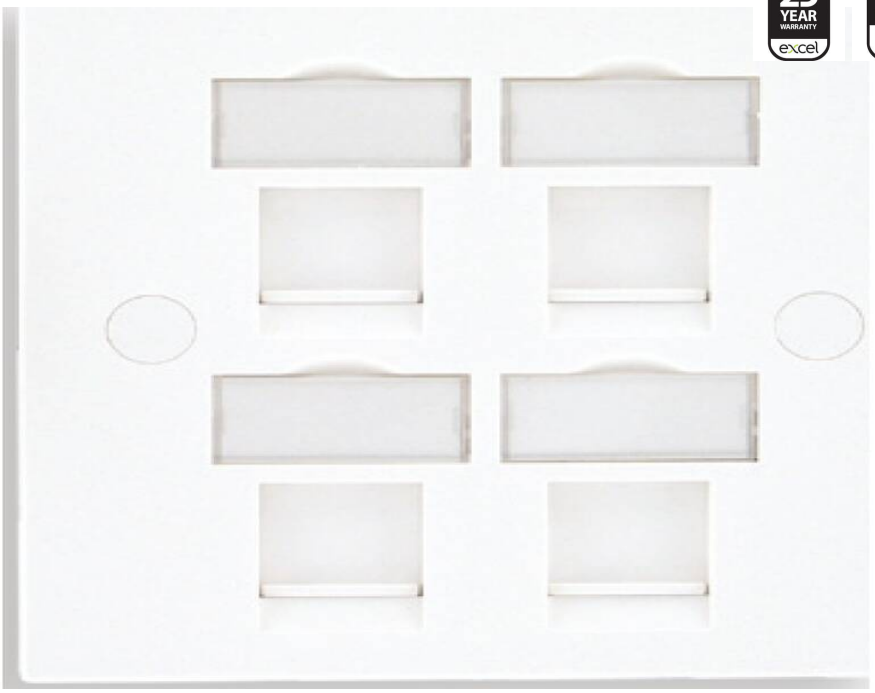

Main Features

- 4 x RJ45 Kaystone Jack Ports
- Designated Label Holders
- Spring Loaded Shutters
- Supplied with Fixing Screws

Product Overview

This Excel Faceplate Range is suitable for the Excel Category 5e, 6 and 6A Keystone jacks including the toolless jacks. The outlet allows up to 4 Keystone jacks to be installed into an 86mm x 86mm footprint. Each outlet has a designated labelling field for clear identification.

The spring loaded shutters over each port protect from dust and foreign objects. This gives a higher port count than traditional outlets and is ideal for floor or wall mounted applications.

Product Specifications

This data sheet was generated at 2:55am 17th November 2026 and is subject to change at any time.


Feature	Values
Number of units	**4**
Number of units horizontal	**2**
Number of units vertical	**2**
Flush-mounted installation	**yes**
Suitable for floor box	**yes**
Label space/information surface	**yes**
Material	**Thermoplastic**
Colour	**White**
RAL-number (akin)	**9003**
Type of fastening	**Screw mounting**
Width	**86 mm**
Height	**86 mm**

Additional specifications

Features	Values
Material	**ABS UL94-V0**
Operating Temperature	**-10 °C to + 60 °C**
Storage Temperature	**-40 °C to + 70 °C**

This data sheet was generated at 2:55am 17th November 2026 and is subject to change at any time.

Product drawing

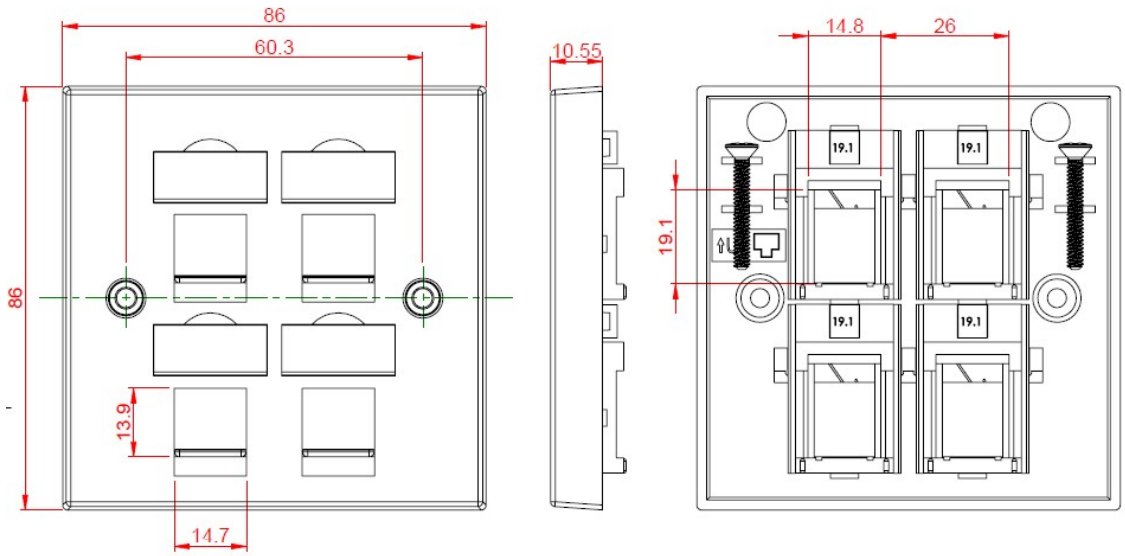

Standards

Applicable standard	Detail
BS EN 60670-1:2005 + A1:2013	Boxes and enclosures for electrical accessories for household and similar fixed electrical installations general requirements
BS EN 61340-5-1:2007	Protection of electronic devices from electrostatic phenomena.General requirements apply to activities that: manufacture, process, assemble, install, package, label, service, test, inspect, transport or otherwise handle electrical or electronic parts, assemblies and equipment susceptible to damage by electrostatic discharges greater than or equal to 100 V human body model (HBM).
BS EN 60529:1992+A2:2013	Degrees of Protection provided by Enclosures (IP CODE)
UL-94-V-0	Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. No flaming drips are allowed.

This data sheet was generated at 2:55am 17th November 2026 and is subject to change at any time.

EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Part Code Table

Part Code	Description
100-705	**Excel Single Gang 4-Port Keystone Flat Faceplate**

This data sheet was generated at 2:55am 17th November 2026 and is subject to change at any time.