


# Excel Cat6A Zone Cable U/FTP 26AWG LSOH CPR Euroclass Dca 305 m Box White

Item Code: 100-982

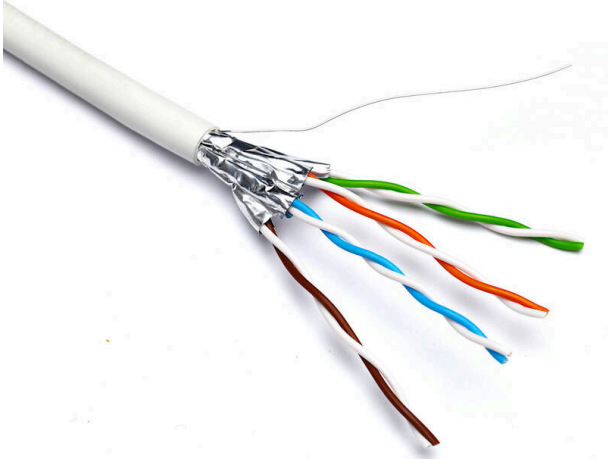

Cat6A 26AWG solid copper cable

Suitable for installations to 60 m PL, 70 m CL

U/FTP no overall screening

Foil screen per pair

Outer sheath colour: white

Reaction-to-fire class according to EN 13501-6: Dca

CIBSE TM65 Embodied Carbon: 79.154 kg CO2e

## Product Overview

Excel Cat6A zone cable U/FTP 26AWG LSOH is manufactured to meet and exceed the ISO, CENELEC and TIA standards up to 60 m permanent link or 70 m channel link. It is not a full blown Cat6A cable and is only intended for data centre zone or residential use where distances beyond 60 m are not required. Excel Cat6A screened (U/FTP) cable takes the performance capabilities of copper infrastructure to new levels.

This delivers Class EA/Augmented Category 6 link performance over distances of up to 70 m channel which supports the applications including 10GBASE-T, 10 Gigabit Ethernet and PoE++.

Each cable consists of 4 pairs of 26AWG solid cores individually wrapped in high quality, strong, aluminium/polyester foil tape providing screening for each pair.

The foil configuration ensures separation of the pairs that ensures the performance and the individual pairs are set to different lay lengths to ensure optimum performance.

## Product Specifications

| Feature           | Values |
|-------------------|--------|
| Conductor surface | Bare   |
| AWG size          | 26     |


Excel Cat6A Zone Cable U/FTP 26AWG LSOH CPR  
Euroclass Dca 305 m Box White

Item Code: 100-982



|   |                                 |
|---|---------------------------------|
| Conductor category  | Class 1 = solid                 |
| Total number of cores   | 8                               |
| Stranding element   | Pairs                           |
| Specification core insulation                                 | Polyethylene (PE)               |
| Core identification   | Colour                          |
| Overall screening   | None                            |
| Conductor screening   | Foil                            |
| Outer sheath material   | Copolymer, thermoplastic (LSOH) |
| Outer sheath colour   | White                           |
| Flame retardant according to IEC 60332-1-2                    | yes                             |
| Low smoke (acc. IEC 61034-2)                                  | yes                             |
| Reaction-to-fire class according to EN 13501-6                | Dca                             |
| Smoke development class according to EN 13501-6               | s1                              |
| Euro class flaming droplets/particles according to EN 13501-6 | d2                              |
| Euro class acidity according to EN 13501-6                    | a1                              |
| Outer diameter approx.  | 5.88 mm                         |
| Operating Temperature Range                                   | -10...60 °C                     |
| Category  | 6A (IEC)                        |
| NVP value   | 69.5 %                          |

### Product drawing

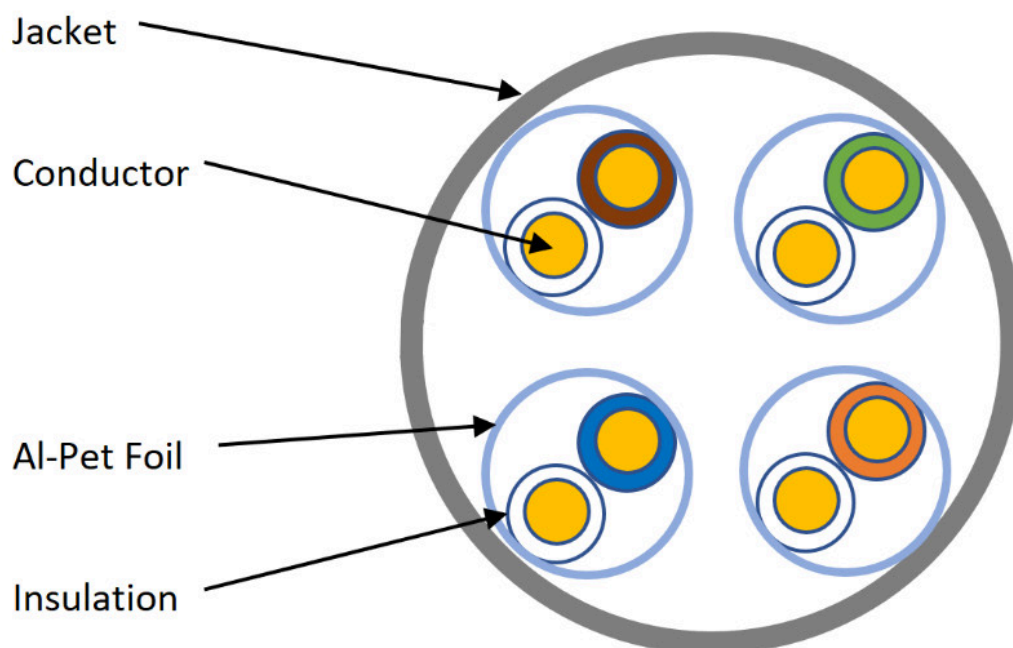

### Additional specifications

| Features                | Values      |
|-------------------------|-------------|
| Maximum pulling load    | 50 N        |
| MBR during installation | 8x cable OD |
| MBR installed           | 4x cable OD |

### Standards

| Applicable standard | Detail  |
|---------------------|---|
| ISO/IEC 11801:2017  | Information technology - Generic cabling for customer premises: Part 1 General requirements   |
| IEC 61156-5:2020    | Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1000 MHz - Horizontal floor wiring - Sectional specification |
| EN 50173-1:2018     | Information technology - Generic cabling systems - General requirements   |

|                                    |  |
|------------------------------------|--|
| EN 50173-2:2018                    | Information technology - Generic cabling systems - Office premises   |
| BS EN 50288-3-1:2013               | Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz  |
| EN 50399:2011+A1:2016              | Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results                            |
| IEC 60332-1-2:2004 + A12:2020      | Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame                         |
| ANSI/TIA 568-D:2015                | Balanced Twisted-Pair Telecommunications Cabling and Components Standards  |
| IEC 60754-2:2014                   | Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity   |
| IEC 61034-2:2005+A2:2020           | Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements  |
| EN 50575:2014 + A1:2016            | Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements   |
| IEEE 802.3bt (Type 4)              | Compliant to IEEE 802.3bt (Type 4)   |
| Directive 2011/65/EU (RoHS II)     | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).   |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.   |
| Directive 2008/98/EC (WFD)         | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).   |
| ECHA SCIP Database                 | Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.                              |
| Regulation (EU) 2019/1021 (POPs)   | EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355). |
| UK SI 2012 No. 3032                | The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product |

Excel Cat6A Zone Cable U/FTP 26AWG LSOH CPR  
Euroclass Dca 305 m Box White

Item Code: 100-982



Safety and Metrology (Amendment etc.) (EU Exit)  
Regulations 2019.

## Part Number Table

| Part Number | Description   |
|-------------|---|
| 100-982     | Excel Cat6A Zone Cable U/FTP 26AWG LSOH CPR Euroclass Dca 305 m Box White |
| 190-982     | Excel Cat6A Zone Cable U/FTP 26AWG LSOH CPR Euroclass B2ca 305 m Box Aqua |

Excel is a world class premium performing end to end infrastructure solution designed,  
Manufactured, supported and delivered without compromise.

Contact us at [sales@excel-networking.com](mailto:sales@excel-networking.com)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.