


# Excel Cat6A High Density Patch Lead S/FTP Shielded LSOH Blade Booted 0.5 m Grey

excel  
without compromise.

Part Code: 102-150

sales@excel-networking.com  
excel-networking.com

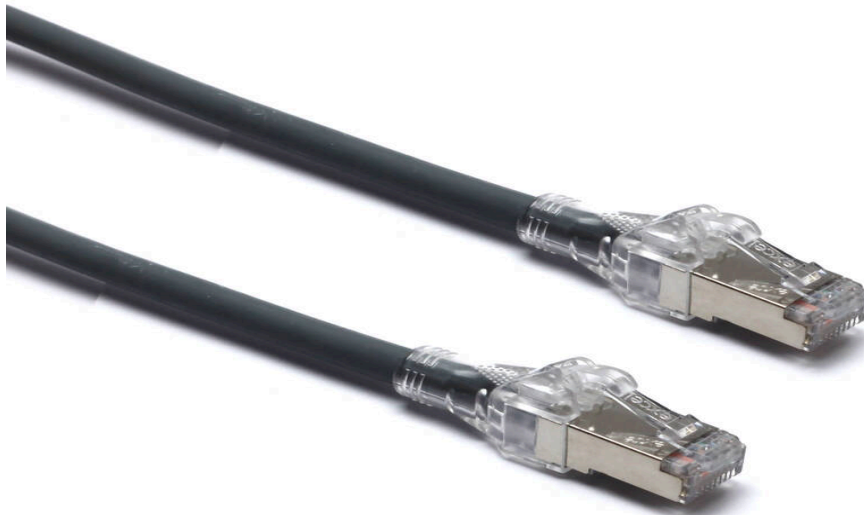

## Main Features

- / Suitable for High Density Switches and Panels
- / Release Tools Sold Separately
- / Backward Compatible - Independently verified
- / Screened braid outer with individual screened foil
- / Category 6A Compliant
- / T568B wiring

## Product Overview

Excel Category 6A S/FTP High Density patch leads are manufactured and tested to ISO 11801, EN 50173 & TIA/EIA 568 requirements for patch cord assemblies and provide optimum performance levels for structured cabling installations.

Plugging and un-plugging is achieved through the unique push-pull design of the RJ45 connector and the use of a special tool (available separately) which extends the grip and removes the necessity to release the connector with the fingers.

## Product Specifications

# Excel Cat6A High Density Patch Lead S/FTP Shielded LSOH Blade Booted 0.5 m Grey

Part Code: 102-150

sales@excel-networking.com  
excel-networking.com


Feature	Values
Cable type	<b>S/FTP</b>
Category	<b>6A (IEC)</b>
Length	<b>0.5 m</b>
Type of connector connection 1	<b>RJ45 8(8)</b>
Type of connector connection 2	<b>RJ45 8(8)</b>
Outer sheath colour	<b>Grey</b>
Strain relief boot	<b>Push-on</b>
Lockable	<b>no</b>
Strain relief boot colour	<b>Grey</b>
Flame retardant version	<b>yes</b>
Cable construction	<b>1x4</b>
AWG-size	<b>26</b>
Pin assignment	<b>1:1</b>

# Excel Cat6A High Density Patch Lead S/FTP Shielded LSOH Blade Booted 0.5 m Grey

Part Code: 102-150

sales@excel-networking.com  
excel-networking.com

## Product drawing

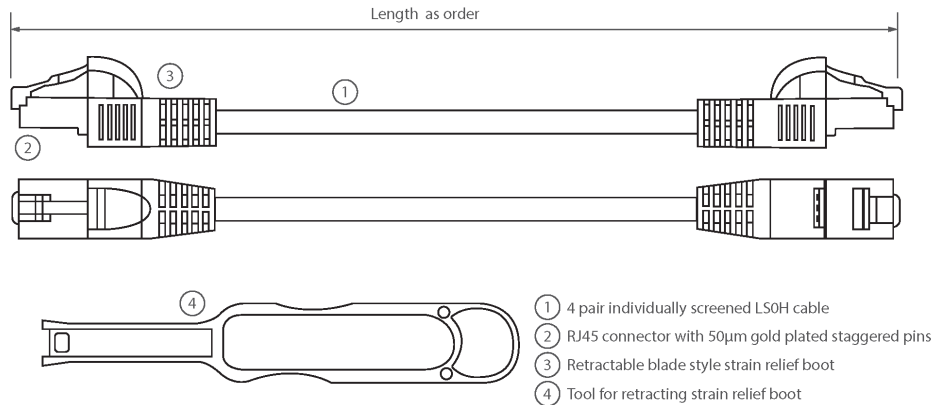

## Standards

Applicable standard	Detail
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under

# Excel Cat6A High Density Patch Lead S/FTP Shielded LSOH Blade Booted 0.5 m Grey

Part Code: 102-150

sales@excel-networking.com  
excel-networking.com

	defined conditions – Part 2: Test procedure and requirements
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

## Part Code Table

Part Code	Description
102-150	<b>Excel Cat6A High Density Patch Lead S/FTP Shielded LSOH Blade Booted 0.5 m Grey</b>
102-152	<b>Excel Cat6A High Density Patch Lead S/FTP Shielded LSOH Blade Booted 1 m Grey</b>
102-154	<b>Excel Cat6A High Density Patch Lead S/FTP Shielded LSOH Blade Booted 2 m Grey</b>

Excel Cat6A High Density Patch Lead S/FTP Shielded LSOH  
Blade Booted 0.5 m Grey

Part Code: 102-150

sales@excel-networking.com  
excel-networking.com

---

102-156	<b>Excel Cat6A High Density Patch Lead S/FTP Shielded LSOH Blade Booted 3 m Grey</b>
---------	--

---

102-158	<b>Excel Cat6A High Density Patch Lead S/FTP Shielded LSOH Blade Booted 5 m Grey</b>
---------	--

---