
Item Code: 190-066









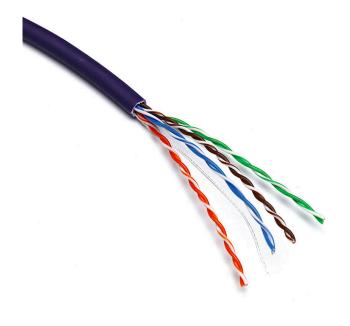



- X Cat5e Solid Copper Cable
- X U/UTP No Overall Screening
- X No Conductor Screening
- X Outer sheath colour Violet
- X Reaction-to-fire class according to EN 13501-6: B2ca
- X Smoke development class according to EN 13501-6:
- X CIBSE TM65 Embodied Carbon: 65.860 kg CO26

#### **Product Overview**

Excel solid Cat5e ethernet cable U/UTP LSOH CPR Euroclass B2ca are manufactured and tested to ISO 11801, EN 50173 and ANSI/TIA-568-C Cat 5e specifications, 305m boxes. Each cable consists of 8 colour coded solid copper conductors twisted together to form four pairs.

The whole cable is produced in a LSOH sheath which is metre marked and labelled with part code and DoP information.

### **Product Specifications**


Feature	Values
Conductor surface	Bare
AWG size	24
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Specification core insulation	Polyethylene (PE)
Core identification	Colour

Item Code: 190-066



Overall screening	None
Conductor screening	None
Outer sheath material	Copolymer, thermoplastic (LS0H)
Outer sheath colour	Violet
Flame retardant according to IEC 60332-1-2	yes
Reaction-to-fire class according to EN 13501-6	B2ca
Smoke development class according to EN 13501-6	sla
Euro class flaming droplets/particles according to EN 13501-6	dO
Euro class acidity according to EN 13501-6	al
Outer diameter approx.	5 mm
Operating Temperature Range	-2060 °C
Category	5E
NVP value	65 %

### **Cross-section diagram**

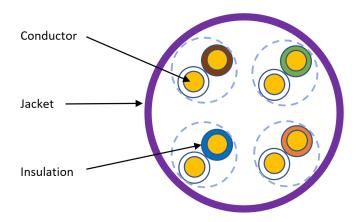

Item Code: 190-066



### **Cable specifications**

Features	Values
MBR during installation	8x cable OD
MBR installed	4x cable OD
Pair-to-Ground Capacitance Unbalance	≤330pF/100m
Resistance Unbalance	0.02
Mutual Capacitance	≤5.6nF/100m
Coupling Attenuation	≥ 40 dB (Type III)
Max.Conductor DC Resistance @ 20 Deg.C	93.8 (Ohm/km)
Min.Insulation Resistance(Mohm.km)	5000
Dielectric strength	DC ,1KV/min

#### **Standards**

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2020	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2018	Information technology. Generic cabling systems - Office premises
BS EN 50288-3-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004 + A12:2020	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-D:2015	Balanced Twisted-Pair Telecommunications Cabling and Components Standards

Item Code: 190-066



IEC 60754-2:2014	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions – Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

#### **Part Number Table**

Part Number	Description
190-066	Excel Solid Cat5e Cable U/UTP LSOH Euroclass B2ca 305 m Box Violet

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

