


Excel Solid Cat6 Cable F/UTP LSOH CPR Euroclass B2ca 305 m Reel Violet

Item Code: 190-076

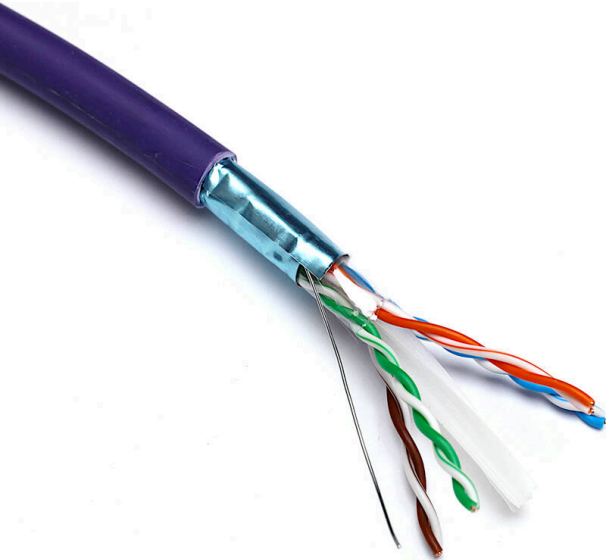

- ✕ Cat6 solid copper cable
- ✕ F/UTP overall foil screening
- ✕ No conductor screening
- ✕ Outer sheath colour: Violet
- ✕ Reaction-to-fire class according to EN 13501-6: B2ca
- ✕ Smoke development class according to EN 13501-6: s1a
- ✕ CIBSE TM65 Embodied Carbon: 132.584 kg CO2e

Product Overview

Excel solid Cat6 ethernet cable F/UTP LSOH CPR Euroclass B2ca manufactured and tested to the TIA/EIA 568-B.2-1, EN50173-1 and ISO/ IEC 11801 Cat 6 specifications, 305 m or 500 m. Each cable consists of 8 colour coded solid copper conductors twisted together to form four pairs.

These are then formed around a central X-shaped polyethylene centre with the whole cable produced in a LSOH sheath.

Product Specifications

Feature	Values
Conductor surface	Bare
AWG size	23
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Specification core insulation	Polyethylene (PE)
Core identification	Colour


# Excel Solid Cat6 Cable F/UTP LSOH CPR Euroclass B2ca 305 m Reel Violet

Item Code: 190-076



Overall screening	Foil
Conductor screening	None
Outer sheath material	Copolymer, thermoplastic (LSOH)
Outer sheath colour	Violet
Flame retardant according to IEC 60332-1-2	yes
Reaction-to-fire class according to EN 13501-6	B2ca
Smoke development class according to EN 13501-6	s1a
Euro class flaming droplets/particles according to EN 13501-6	d1
Euro class acidity according to EN 13501-6	a1
Outer diameter approx.	7.6 mm
Installation Temperature Range	0...50 °C
Operating Temperature Range	-10...60 °C
Category	6
NVP value	70 %

**Cross-section diagram**

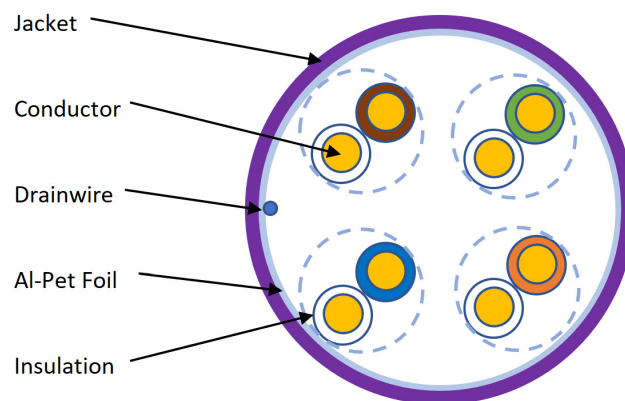

## Cable specifications

Features	Values
Dielectric strength	2.5 kV for 2 s
Maximum pulling load	100 N
MBR during installation	8x cable OD
MBR installed	4x cable OD

## Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2020	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2018	Information technology. Generic cabling systems - Office premises
BS EN 50288-3-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004 + A12:2020	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-D:2015	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2014	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

# Excel Solid Cat6 Cable F/UTP LSOH CPR Euroclass B2ca 305 m Reel Violet

Item Code: 190-076



## Part Number Table

Part Number	Description
100-076	Excel Solid Cat6 Cable F/UTP LSOH CPR Euroclass Dca 305 m Reel Violet
100-076/LTGN-500	Excel Solid Cat6 Cable F/UTP LSOH CPR Euroclass Dca 500 m Reel Light Green
100-076-1000	Excel Solid Cat6 Cable F/UTP LSOH CPR Euroclass Dca 1000m Reel Violet
100-076-305M-GN	Excel Solid Cat6 Cable F/UTP LSOH CPR Euroclass Dca 305 m Box EasyReel Green
100-077/LTGN	Excel Solid Cat6 Dual Cable F/UTP LSOH CPR Euroclass Dca 500 m Reel Light Green
190-076	Excel Solid Cat6 Cable F/UTP LSOH CPR Euroclass B2ca 305 m Reel Violet
190-076-305M-GN	Excel Category 6 Cable F/UTP B2ca LSOH 305m Easyreel Box - Green
190-076-500	Excel Solid Cat6 Cable F/UTP LSOH CPR Euroclass B2ca 500 m Reel Violet

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at [sales@excel-networking.com](mailto:sales@excel-networking.com)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.