


# Excel Enbeam FTTx 4 Port SC Outlet with 70 m Drop Cable

Item Code: 200-449-70

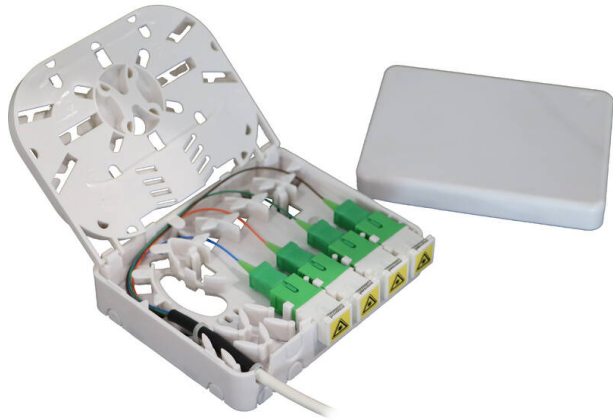

- ✕ Hinged Splice Tray holds up to 8 heatshrink splice protectors
- ✕ Multiple cable entry points
- ✕ Fixing hardware included
- ✕ Loaded with 4 X SCA Shuttered adapters
- ✕ Pre terminated with 4 core Cca drop cable

## Product Overview

The Excel Enbeam FTTx Surface mount box has been designed for applications such as Fibre to the Home or Fibre to the Desk. This Wall outlet can also be fitted with a DIN rail mounting plate for installations requiring Din mounting capability. Pre terminate with a 4 core 250 Micron Cca,s1a,d0,a1 drop cable 70 m in length terminated one end with 4 x SC APC connectors and open at the other, allows quick installation within the customer premises.

## Product Specifications

| Feature                         | Values         |
|---------------------------------|----------------|
| Surface mounted                 | yes            |
| Type of connector               | SC/APC simplex |
| With couplers                   | yes            |
| Suitable for number of couplers | 4              |
| Suitable for type of fibre      | Single mode    |
| Width                           | 100 mm         |
| Height                          | 80.6 mm        |
| Depth                           | 29.5 mm        |

# Excel Enbeam FTTx 4 Port SC Outlet with 70 m Drop Cable

Item Code: 200-449-70



## Additional specifications


| Features  | Values        |
|---|---------------|
| Capacity  | 4 Fibre       |
| Material  | ABS Plastic   |
| Colour  | White         |
| Operating Temperature   | -20 to +85 °C |
| Drop Cable  |               |
| Cable Diameter  | 3mm           |
| Fibre type  | 9/125 G657-A2 |
| Number of cores   | 4             |
| Core size   | 250um         |
| Colour  | RAL 9010      |
| Operating temprature  | -20°C ~ +70°C |
| Reaction-to-fire class according to EN 13501-6                | B2ca          |
| Smoke development class according to EN 13501-6               | s1a           |
| Euro class flaming droplets/particles according to EN 13501-6 | d0            |
| Euro class acidity according to EN 13501-6                    | a1            |

Excel Enbeam FTTx 4 Port SC Outlet with 70 m Drop Cable

Item Code: 200-449-70



Cross-section view (drop cable)

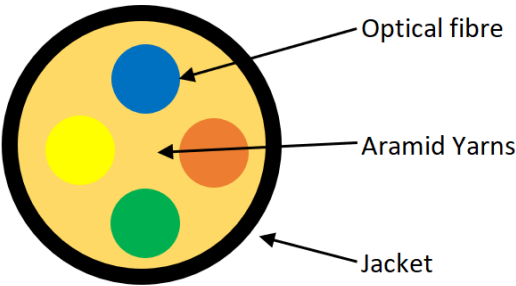

Standards

| Applicable standard                        | Detail  |
|--|---|
| RoHS-II/-III (2011/65/EU & 2015/863): 2023 | Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III). |
| IEC 61754-1:2013                           | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance  |
| ISO/IEC 11801-1:2017                       | Information technology - Generic cabling for customer premises: Part 1 General Requirements   |
| EN 50173-1:2018                            | Information technology. Generic cabling systems - General requirements  |
| UL-94-V-0                                  | Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. NO flaming drips are allowed.  |
| WFD: 2023                                  | Compliant to Waste Framework Directive  |
| SCIP: 2023                                 | Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)   |
| POPs (EU) No 2019/1021                     | EU Regulation for the restriction of Persistent Organic Pollutants.   |

# Excel Enbeam FTTx 4 Port SC Outlet with 70 m Drop Cable

Item Code: 200-449-70



## Part Number Table

| Part Number | Description   |
|-------------|---|
| 200-449-30  | Excel Enbeam FTTx 4 Port SC Outlet with 30 m Drop Cable |
| 200-449-50  | Excel Enbeam FTTx 4 Port SC Outlet with 50 m Drop Cable |
| 200-449-70  | Excel Enbeam FTTx 4 Port SC Outlet with 70 m Drop Cable |

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at [sales@excel-networking.com](mailto:sales@excel-networking.com)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.