


# Excel Enbeam FTTx 4 Port SC Outlet with 70 m Drop Cable

Part Code: 200-449-70

sales@excel-networking.com  
excel-networking.com

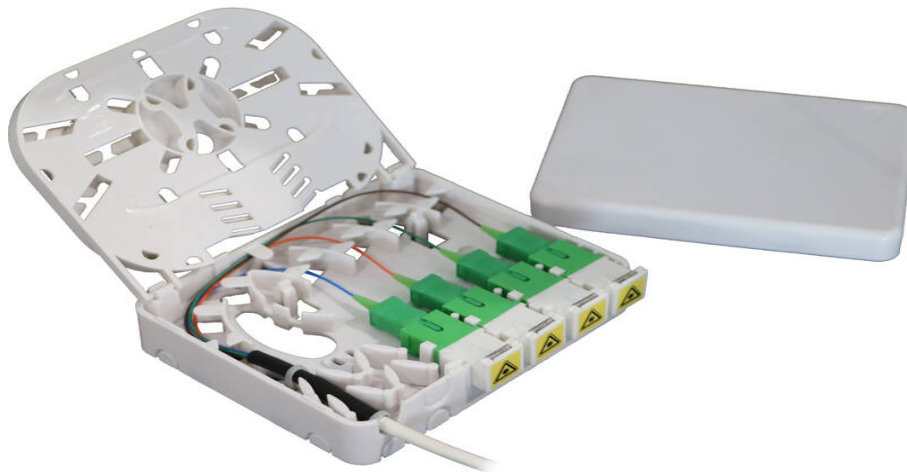

## Main Features

- / Hinged Splice Tray holds up to 8 heatshrink splice protectors
- / Multiple cable entry points
- / Fixing hardware included
- / Loaded with 4 X SCA Shuttered adapters
- / Pre terminated with 4 core Cca drop cable

## Product Overview

The Excel Enbeam FTTx Surface mount box has been designed for applications such as Fibre to the Home or Fibre to the Desk. This Wall outlet can also be fitted with a DIN rail mounting plate for installations requiring Din mounting capability. Pre terminate with a 4 core 250 Micron Cca,s1a,d0,a1 drop cable 70 m in length terminated one end with 4 x SC APC connectors and open at the other, allows quick installation within the customer premises.

## Product Specifications

# Excel Enbeam FTTx 4 Port SC Outlet with 70 m Drop Cable

**Part Code: 200-449-70**

[sales@excel-networking.com](mailto:sales@excel-networking.com)  
[excel-networking.com](http://excel-networking.com)

| Feature                         | Values         |
|---------------------------------|----------------|
| Surface mounted                 | yes            |
| Type of connector               | SC/APC simplex |
| With couplers                   | yes            |
| Suitable for number of couplers | 4              |
| Suitable for type of fibre      | Single mode    |
| Width                           | 100 mm         |
| Height                          | 80.6 mm        |
| Depth                           | 29.5 mm        |

## Additional specifications

| Features                                       | Values        |
|--|---------------|
| Capacity                                       | 4 Fibre       |
| Material                                       | ABS Plastic   |
| Colour   | White         |
| Operating Temperature                          | -20 to +85 °C |
| Drop Cable                                     |               |
| Cable Diameter                                 | 3mm           |
| Fibre type                                     | 9/125 G657-A2 |
| Number of cores                                | 4             |
| Core size                                      | 250um         |
| Colour   | RAL 9010      |
| Operating temperature                          | -20°C ~ +70°C |
| Reaction-to-fire class according to EN 13501-6 | B2ca          |

# Excel Enbeam FTTx 4 Port SC Outlet with 70 m Drop Cable

**Part Code: 200-449-70**


sales@excel-networking.com  
excel-networking.com

Smoke development class according to EN 13501-6 **s1a**

Euro class flaming droplets/particles according to EN 13501-6 **d0**

Euro class acidity according to EN 13501-6 **a1**

## Cross-section view (drop cable)

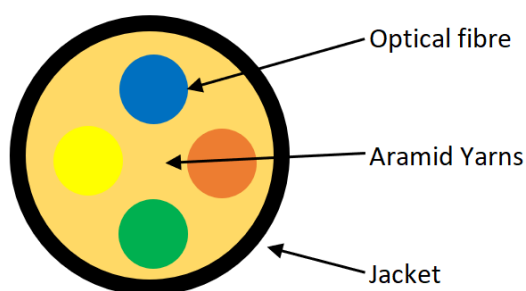

## Standards

| Applicable standard                | Detail   |
|------------------------------------|--|
| Directive 2011/65/EU (RoHS II)     | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states). |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.   |
| IEC 61754-1:2013                   | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance                 |
| ISO/IEC 11801-1:2017               | Information technology - Generic cabling for customer  |

# Excel Enbeam FTTx 4 Port SC Outlet with 70 m Drop Cable

**Part Code: 200-449-70**

[sales@excel-networking.com](mailto:sales@excel-networking.com)  
[excel-networking.com](http://excel-networking.com)

|                                  |  |
|----------------------------------|--|
|                                  | premises: Part 1 General Requirements  |
| EN 50173-1:2018                  | Information technology. Generic cabling systems - General requirements   |
| UL-94-V-0                        | Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. NO flaming drips are allowed.   |
| Directive 2008/98/EC (WFD)       | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).   |
| ECHA SCIP Database               | Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.  |
| Regulation (EU) 2019/1021 (POPs) | EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).   |
| UK SI 2012 No. 3032              | The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019. |

## Part Code Table

| Part Code  | Description  |
|------------|--|
| 200-449-30 | <b>Excel Enbeam FTTx 4 Port SC Outlet with 30 m Drop Cable</b> |
| 200-449-50 | <b>Excel Enbeam FTTx 4 Port SC Outlet with 50 m Drop Cable</b> |
| 200-449-70 | <b>Excel Enbeam FTTx 4 Port SC Outlet with 70 m Drop Cable</b> |