
# Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC Tight Buffered 12-Colour Pack (TIA 598) 2 m

**Part Code: 200-455**

sales@excel-networking.com
excel-networking.com

CIBSE TM65 Embodied Carbon: 0.206 kg CO2e

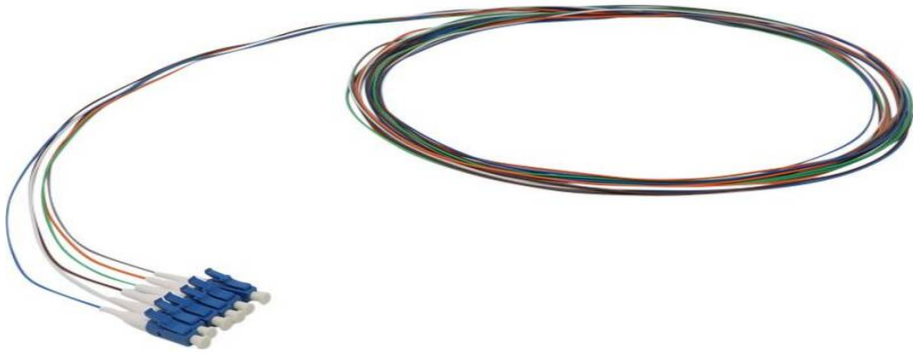

## Main Features

- / Colour-coded fibres to TIA standard
- / Easy to manage packaging
- / Test Certificate with each cable
- / Tight buffered construction
- / Bend insensitive construction
- / RoHS Compliant

## Product Overview

Excel singlemode Tight Buffered fibre optic pigtails are manufactured from the highest quality 900 micron optical fibre, terminated with ceramic ferrule connectors of various types.

Cable preparation, termination and testing is carried out to strictly managed procedures in an Excel approved, ISO9001 registered manufacturing facility. Each pigtail has a strain relief boot to prolong and maintain performance levels of the assembly. A short distance from the connector a label containing a unique batch number is fixed to cable for quality and traceability purposes.


This data sheet was generated at 1:31am 17th November 2026 and is subject to change at any time.

# Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC Tight Buffered 12-Colour Pack (TIA 598) 2 m

**Part Code: 200-455**

sales@excel-networking.com
excel-networking.com

## Product Specifications

| Feature | Values |
|---|---|
| Fibre type | **Single mode** |
| Category | **OS2** |
| Length | **2 m** |
| Type of connector | **LC** |
| APC-type | **no** |
| Colour | **Multi Coloured (TIA 598)** |
| Strain relief boot | **Push-on** |


This data sheet was generated at 1:31am 17th November 2026 and is subject to change at any time.

## Product schematics




This data sheet was generated at 1:31am 17th November 2026 and is subject to change at any time.

# Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC Tight Buffered 12-Colour Pack (TIA 598) 2 m


**Part Code: 200-455**

sales@excel-networking.com
excel-networking.com

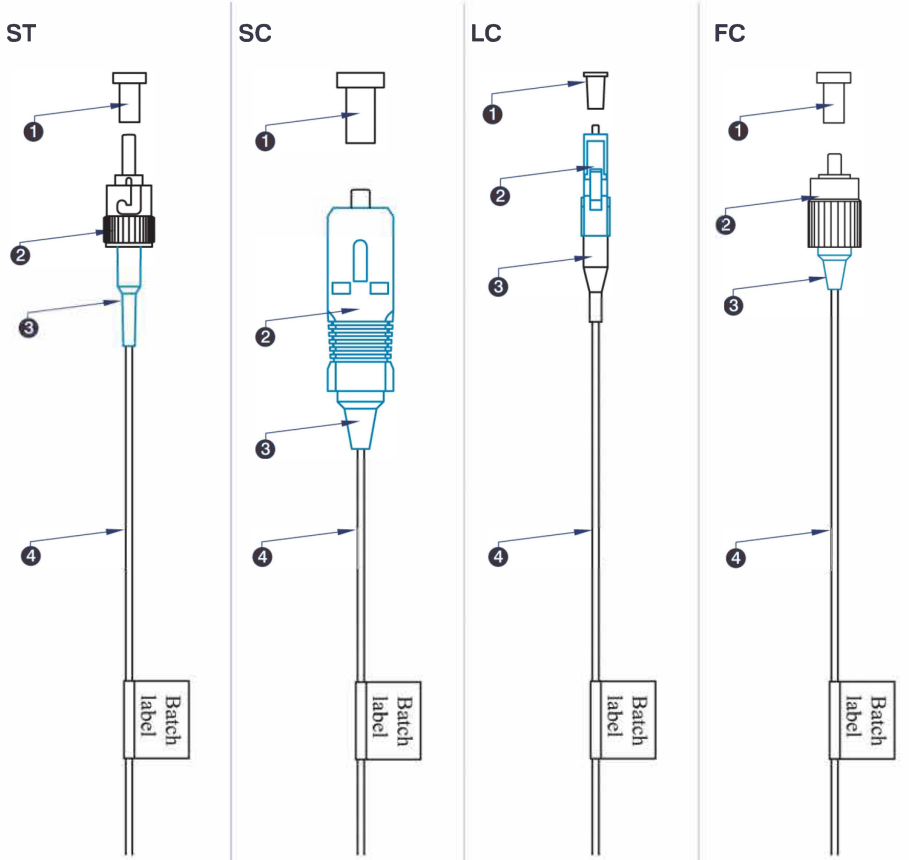



| ST | SC | LC | FC |
|---|---|---|---|
| ❶ ST Dust cover | ❶ SC Dust cover | ❶ LC Dust cover | ❶ FC Dust cover |
| ❷ ST connector | ❷ SC connector | ❷ LC connector | ❷ FC connector |
| ❸ ST Strain relief boot | ❸ SC Strain relief boot | ❸ LC Strain relief boot | ❸ FC Strain relief boot |
| ❹ Easy Strip LSOH cable | ❹ Easy Strip LSOH cable | ❹ Easy Strip LSOH cable | ❹ Easy Strip LSOH cable |

## Cable Profile




## Packaging

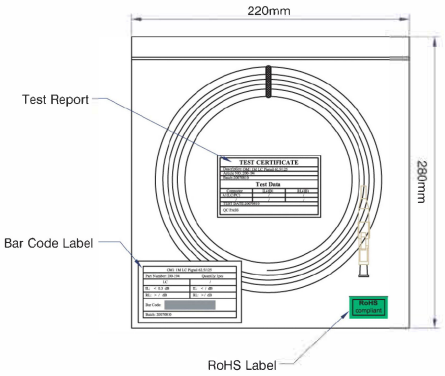




This data sheet was generated at 1:31am 17th November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

## Cable specifications

| Features | Values | ST Assemblies | SC Assemblies | LC Assemblies |
|---|---|---|---|---|
| Construction | **Semi-Tight Buffered** | | | |
| No. of Fibres | **1** | | | |
| Diameter | **900 micron** | | | |
| Temperature range | **-20C to +70C** | | | |
| Connector Material | | **Nickel plated Brass** | **Composite** | **Composite** |
| Minimum bend radius | **10 x cable diameter** | | | |
| Connector Ferrule | | **2.5 mm Zirconium ceramic** | **2.5 mm Zirconium ceramic** | **1.25 mm Zirconium ceramic** |
| Connector Insertion Loss | **Max. 0.3 dB** | | | |
| Connector Return Loss (Multimode) | **Max. -30 dB** | | | |
| Ferrule End Face (Singlemode UPC) | **Max. -50 dB** | | | |
| Ferrule End Face (Singlemode APC) | **Max. -60 dB** | | | |



This data sheet was generated at 1:31am 17th November 2026 and is subject to change at any time.

## Fibre specifications

| Features | Values |
|---|---|
| Mode Field diameter at 1310 nm | **8.4-9.2 µm** |
| Mode Field diameter at 1550 nm | **9.3-10.3 µm** |
| Cladding diameter | **125.0±0.7 µm** |
| Cladding Non-circularity | **≤ 0.7 %** |
| Primary Coating diameter | **235-245 µm** |
| Coating-Cladding Concentricity Error | **≤ 12 µm** |
| Coating Non-circularity | **≤ 6.0 %** |
| Core-Cladding Concentricity Error | **≤ 0.5 µm** |
| Max. attenuation at 1310 nm | **≤ 0.35 dB/km** |
| Max. attenuation at 1383 nm | **≤ 0.35 dB/km** |
| Max. attenuation at 1460 nm | **≤ 0.25 dB/km** |
| Max. attenuation at 1490 nm | **≤ 0.23 dB/km** |
| Max attenuation at 1550 nm | **≤ 0.21 dB/km** |
| Max attenuation at 1625 nm | **≤ 0.23 dB/km** |
| PMD (typical value) | **0.04 ps/km** |
| Cut-off wavelength | **1260 nm** |
| Zero dispersion wavelength | **1300-1324 nm** |
| Zero dispersion slope | **≤0.092 ps/nm2.km** |
| Refractive Index at 1310 nm | **1.466** |
| Refractive Index at 1550 nm | **1.467** |
| Macro-Bend Loss - 10 turns, 15 mm radius, 1625 nm | **≤ 0.0 3dB** |


This data sheet was generated at 1:31am 17th November 2026 and is subject to change at any time.

| | |
|---|---|
| Macro-Bend Loss - 10 turns, 15 mm radius, 1550 nm | ≤ **0.1 dB** |
| Macro-Bend Loss - 1 turn, 10 mm radius, 1550 nm | ≤ **0.1 dB** |
| Macro-Bend Loss - 1 turn, 10 mm radius, 1625 nm | ≤ **0.2 dB** |
| Macro-Bend Loss - 1 turn, 7.5 mm radius, 1550 nm | ≤ **0.5 dB** |
| Macro-Bend Loss - 1 turn, 7.5 mm radius, 1625 nm | ≤ **1.0 dB** |

## Standards

| Applicable standard | Detail |
|---|---|
| BS EN 60332-1-2:2004+A11:2016 | Tests on electric and optical fibre cables under fire conditions - Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame |
| IEC 60793-1-1:2022 | Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance |
| IEC 60793-2:2015 | Optical fibres - Part 2: Product specifications - General |
| IEC 60793-2-10:2017 | Sectional specification for A1 multimode fibres |
| IEC 60793-1-20:2014 | Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry |
| IEC 60793-1-21:2001 | Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry |
| IEC 60793-1-22:2001 | Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement |
| IEC 60793-1-30:2010 | Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test |
| IEC 60793-1-31:2010 | Optical fibres - Part 1-31: Measurement methods and test procedures - Tensile Strength |
| ITU-T G.652:2016 | Characteristics of a single-mode optical fibre and cable |


This data sheet was generated at 1:31am 17th November 2026 and is subject to change at any time.

| | |
|---|---|
| ITU-T G.657:2016 | Characteristics of a bending-loss insensitive single-mode optical fibre and cable |
| EN 50173-1:2018 | Information technology. Generic cabling systems - General requirements |
| EN 50173-2:2007 + A1:2010 | Information technology. Generic cabling systems - Office premises |
| IEC 61754-1:2013 | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance |
| IEC 61754-2:1996 | Fibre optic connector interfaces - Part 2: Type BFOC/2,5 connector family |
| IEC 61754-4:2013 | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4: Type SC connector family |
| IEC 61754-4-100:2015 | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4-100: Type SC connector family - Simplified receptacle SC-PC connector interfaces |
| Directive 2011/65/EU (RoHS II) | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states). |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant. |
| ANSI/TIA 568-3.D | Optical Fiber Cabling and Components Standard |
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| Directive 2008/98/EC (WFD) | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988). |
| ECHA SCIP Database | Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH. |
| Regulation (EU) 2019/1021 (POPs) | EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the |


This data sheet was generated at 1:31am 17th November 2026 and is subject to change at any time.

| | |
|---|---|
| | Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355). |
| UK SI 2012 No. 3032 | The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019. |

## Part Code Table

| Part Code | Description |
|---|---|
| 200-454 | **Excel Enbeam Fibre Pigtail OS2 9/125 SC/UPC Tight Buffered 12-Colour Pack (TIA 598) 2 m** |
| 200-455 | **Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC Tight Buffered 12-Colour Pack (TIA 598) 2 m** |
| 200-456 | **Excel Enbeam Fibre Pigtail OS2 9/125 SC/APC Tight Buffered 12-Colour Pack (TIA 598) 2 m** |
| 200-457 | **Excel Enbeam Fibre Pigtail OS2 9/125 LC/APC Tight Buffered 12-Colour Pack (TIA 598) 2 m** |
| 200-548 | **Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC 12-Colour Pack (TIA 598) 1 m** |
| 200-554 | **Excel Enbeam Fibre Pigtail OS2 9/125 SC/UPC Yellow 2 m** |
| 200-561 | **Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC Yellow 2 m** |
| 200-565 | **Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC 12-Colour Pack (TIA 598) 0.5 m** |
| 200-576 | **Excel Enbeam Fibre Pigtail OS2 9/125 ST/UPC Yellow 2 m** |
| 200-602 | **Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC 12-Colour Pack (TIA 598) 2m** |
| 200-723-12 | **Excel Enbeam Fibre Pigtail OS2 9/125 SC/UPC Semi Loose Buffer Yellow 1 m (12-Pack)** |


This data sheet was generated at 1:31am 17th November 2026 and is subject to change at any time.