Item Code: 200-474









- X Multiple cable entry to rear
 X 1U rack space design
 X Optional patchcord management
 X Special configurations made to order
 X 25 year system warranty
 - X CIBSE TM65 Embodied Carbon: 19.983 kg CO2e

Product Overview

The Excel range of LC patch panels are sliding drawer "tray style" housings suitable for either direct termination or splicing of up to 24 fibre using SC simplex or 48 when using LC duplex connections in a 1U space. Each panel is manufactured from a mix of 1 mm thick steel with a powder coated finish and a high-density Polycarbonate sliding tray, offering a lightweight, strong durable unit.

To the front of the patch panel the specified number of duplex/quad adaptors are loaded from left to right. Each panel utilises colour coded adaptors, beige, aqua and violet for multimode, blue for single mode and green for SM/APC. Each simplex/duplex adaptor accommodates 1 to 2 terminated fibres.

Note that this panel only accepts flanged and flangeless SC/LC adaptors and can be assembled to order using a combination of adaptors, piqtails and splice cassettes - call to enquire.

Product Specifications

Feature	Values
Suitable for number of fibre cores	48
Suitable for number of module inserts	24
Loaded with number of couplings/adapters	12
With pigtails	no
Fibre type	Single mode
Fibre class	OS2
APC-type	no
Type of connector external	LC-Duplex

Item Code: 200-474



Type of connector interior	LC-Duplex
Colour	Black
RAL-number	9005
Mounting method	482.6 mm (19 inch) mounting
Number of rack units (RU)	1
Height	43.5 mm
Width	483 mm
Depth	219.5 mm

Additional specifications

Feature	Value
Operating temperature	-40 to +80 °C
IP rating	IP20
Cable entry 20 mm	2
Cable entry 25 mm	2
Blown fibre entry	8
Material	Colds rolled steel and polycarbonate
Metal material thickness	1 mm
Material coating (metal)	Powder coating
Polycarbonate material thickness	Verious
RoHs compliant adaptor	yes
Designed in accordance with	ISO/IEC 11801, IEC60304, IEC61754, TIA/EIA 568.D

Included accessories

Accessories	Quantity
Cable Gland (PG 13.5)	1
Cable Gland(PG 19)	1
Nylon cable tie	7
Adjustable cable tie	4
24 Position splice holder	1 to 3 Dependant on fibre count
Label holder (210 x 9.2 mm)	2

Item Code: 200-474




Mounting twist tie 4


Cage nuts and screws 1 pack

Item Code: 200-474



Product drawing



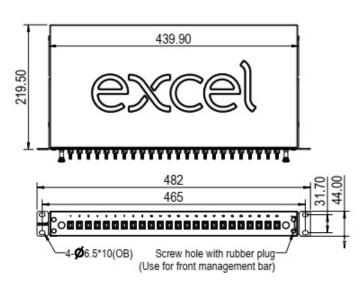



Item Code: 200-474



Standards

Applicable standard	Detail
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

Part Number Table

Part Number	Description
200-460	Excel Enbeam 24 Way Multimode Fibre Optic Panel 4 LC Duplex (8 Fibre) Beige
200-461	Excel Enbeam 24 Way Multimode Fibre Optic Panel 6 LC Duplex (12 Fibre) Beige
200-462	Excel Enbeam 24 Way Multimode Fibre Optic Panel 8 LC Duplex (16 Fibre) Beige
200-464	Excel Enbeam 24 Way Multimode Fibre Optic Panel 12 LC Duplex (24 Fibre) Beige
200-466	Excel Enbeam 24 Way Multimode Fibre Optic Panel 24 LC Duplex (48 Fibre) Beige
200-470	Excel Enbeam 24 Way Singlemode Fibre Optic Panel 4 LC Duplex (8 Fibre) Blue
200-472	Excel Enbeam 24 Way Singlemode Fibre Optic Panel 8 LC Duplex (16 Fibre) Blue
200-474	Excel Enbeam 24 Way Singlemode Fibre Optic Panel 12 LC Duplex (24 Fibre) Blue
200-476	Excel Enbeam 24 Way Singlemode Fibre Optic Panel 24 LC Duplex (48 Fibre) Blue

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.



Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.