

# Excel Enbeam 24 Way Singlemode Fibre Optic Panel 24 LC Quad (96 Fibre) Blue

Item Code: 200-488

**excel**  
without compromise.



Multiple cable entry to rear

Up to 96 fibres

1U rack space design

Optional patchcord management

Special configurations made to order

25 year system warranty

CIBSE TM65 Embodied Carbon: 19.983 kg CO<sub>2</sub>e

## Product Overview

The Excel range of LC patch panels are sliding drawer "tray style" housings suitable for either direct termination or splicing of up to 96 fibres in 1U of rack space. Each panel is manufactured from high quality 2 mm thick steel and finished in Black powder coat to provide a strong and durable unit.

To the front of the patch panel the specified number of adaptors are loaded from left to right. Each panel utilises colour coded adaptors, beige, aqua and violet for multimode, blue for singlemode, and green for Singlemode APC. Each duplex (or quad) adaptor accommodates two (four) terminated fibres.

Each panel has included within it a set of fixing brackets, and a cable management pack which includes cable entry glands, cable ties, splice holders, cage nuts and screws are also provided.

This design delivers lower emissions and less reliance on mineral extraction, while achieving a 36% decrease in embedded carbon compared with the metal version. The lighter construction also minimises floor loading during installation and decreases the overall cabinet weight, improving handling and installation efficiency.

Additional features include easier one-person installation, integrated knockouts, and rear entry points on both the left and right sides for improved cable access and flexibility.

Note that LC panels can be assembled to order using a combination of adaptors, pigtailed and splice cassettes.

## Product Specifications

# Excel Enbeam 24 Way Singlemode Fibre Optic Panel 24 LC Quad (96 Fibre) Blue

Item Code: 200-488



Feature	Values
Suitable for number of fibre cores	96
Suitable for number of module inserts	24
Loaded with number of couplings/adapters	24
With pigtails	no
Fibre type	Single mode
Fibre class	OS2
APC-type	no
Type of connector external	LC-Quad
Type of connector interior	LC-Quad
Colour	Black
RAL-number	9005
Mounting method	482.6 mm (19 inch) mounting
Number of rack units (RU)	1
Height	43.5 mm
Width	483 mm
Depth	219.5 mm

## Additional specifications

Feature	Value
Operating Temperature	-40 to +80 °C
IP Rating	IP20
Cable Entry 20mm	2
Cable Entry 25mm	2
Material	Cold rolled steel
Material Thickness	1.2 mm
Material Coating	Powder coating
RoHs Compliant Adaptor	Yes
Designed in accordance with	ISO/IEC 11801, IEC60304, IEC61754, TIA/EIA 568.D

Excel Enbeam 24 Way Singlemode Fibre Optic Panel  
24 LC Quad (96 Fibre) Blue

Item Code: 200-488



**Included accessories**

Accessories	Quantity
Cable Gland (PG 13.5)	1
Cable Gland( PG 19)	1
Nylon cable tie	7
Adjustable cable tie	4
24 Position splice holder	1 to 3 Dependant on fibre count
Label holder (210 x 9.2 mm)	2
Mounting twist tie	4
Cage nuts and screws	1 pack

Excel Enbeam 24 Way Singlemode Fibre Optic Panel  
24 LC Quad (96 Fibre) Blue


Item Code: 200-488



### Product drawings

# Excel Enbeam 24 Way Singlemode Fibre Optic Panel 24 LC Quad (96 Fibre) Blue

Item Code: 200-488

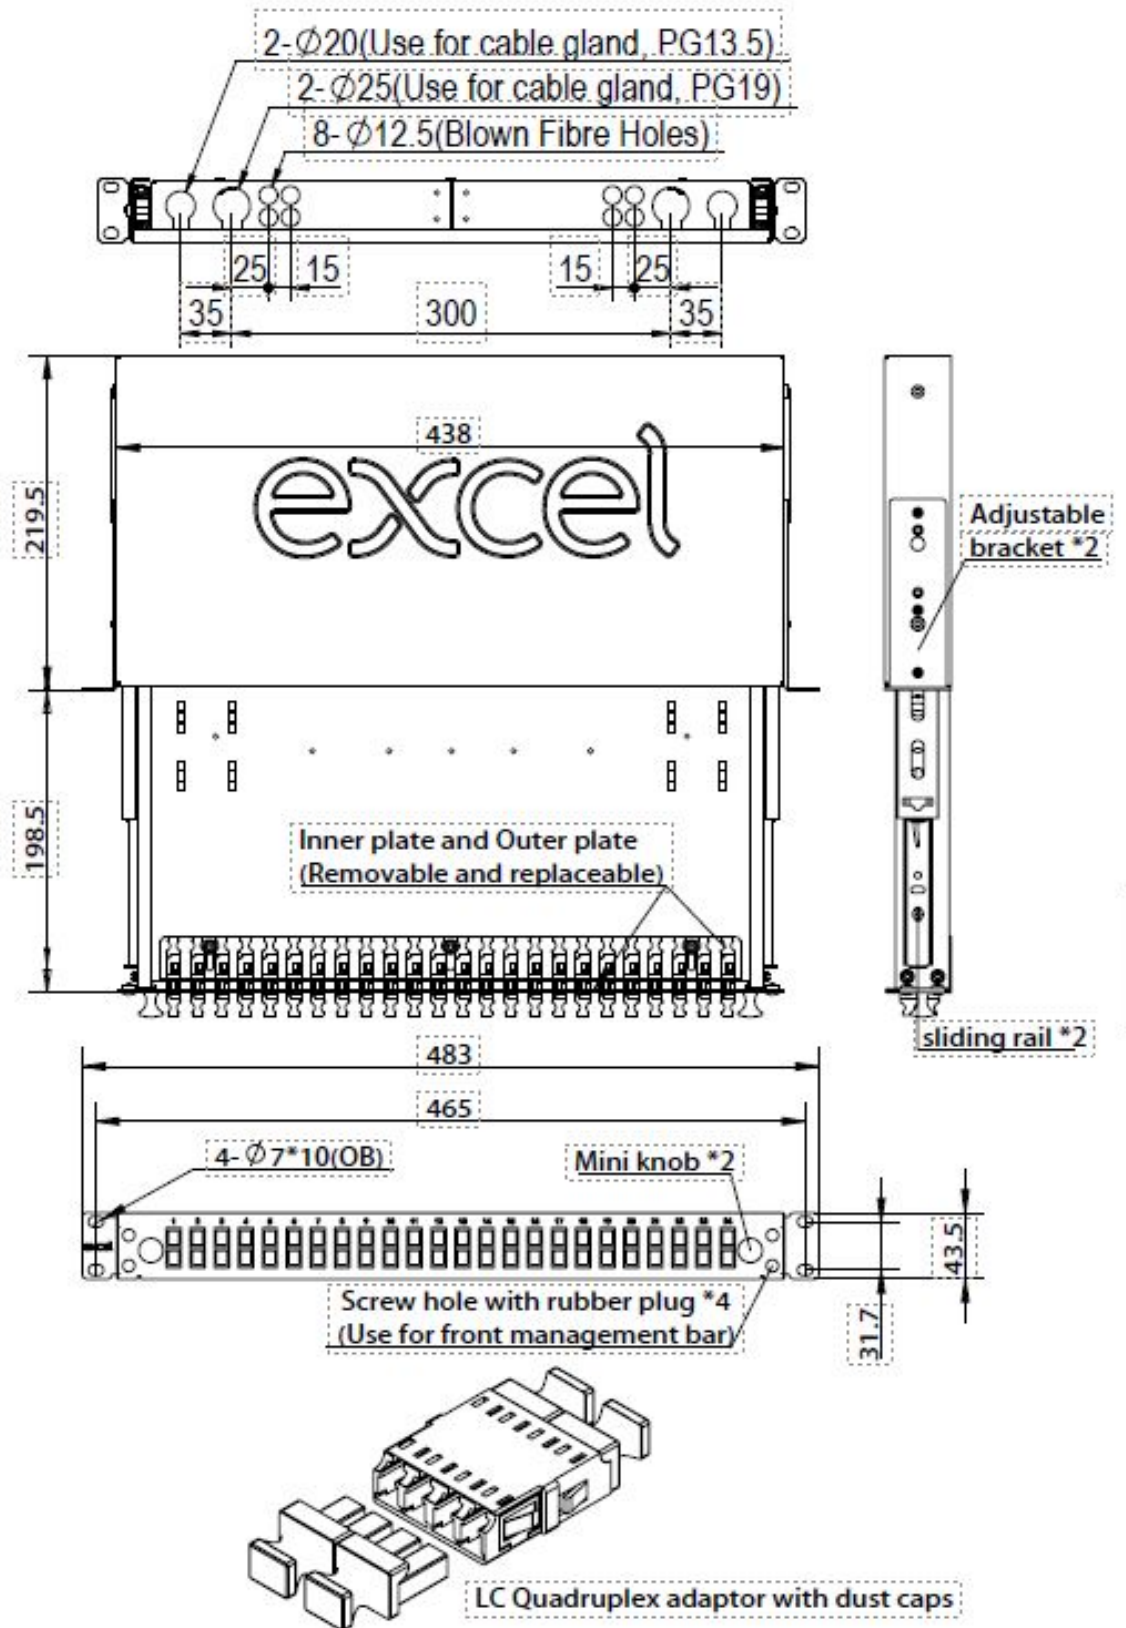

# Excel Enbeam 24 Way Singlemode Fibre Optic Panel 24 LC Quad (96 Fibre) Blue

Item Code: 200-488



## Standards

Applicable standard	Detail
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

## Part Number Table

Part Number	Description
200-488	Excel Enbeam 24 Way Singlemode Fibre Optic Panel 24 LC Quad (96 Fibre) Blue
200-489	Excel Enbeam 24 Way Multimode Fibre Optic Panel 24 LC Quad (96 Fibre) Beige
203-553	Excel Enbeam 24 Way Multimode Fibre Optic Panel 24 LC Quad (96 Fibre) Aqua
204-553	Excel Enbeam 24 Way Multimode Fibre Optic Panel 24 LC Quad (96 Fibre) Violet

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at [sales@excel-networking.com](mailto:sales@excel-networking.com)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.