
Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC 12-Colour Pack (TIA 598) 1 m

Part Code: 200-548

sales@excel-networking.com
excel-networking.com

CIBSE TM65 Embodied Carbon: 1.248 kg CO2e

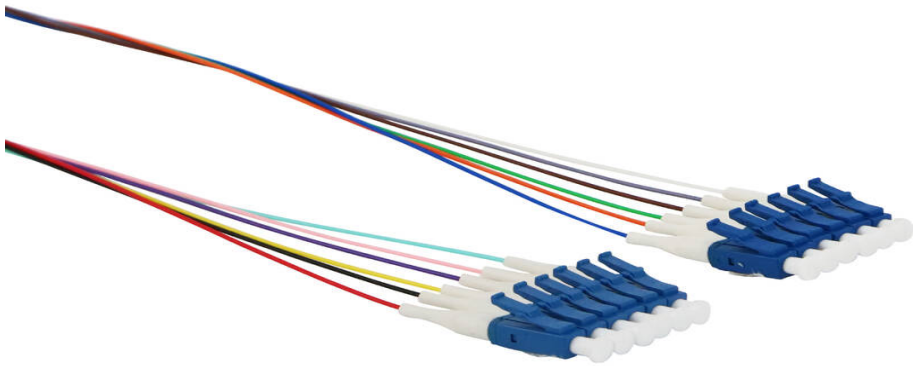

Main Features

- Semi loose buffered
- Test certificate with each cable
- Bend insensitive construction
- Each cable is individually packaged and labelled
- RoHS compliant
- Fibre Grade: G.657.A2

Product Overview

Excel singlemode fibre optic pigtails are manufactured from the highest quality 900 µm optical fibre, terminated with ceramic ferrule connectors of various types. To assist in fast cable preparation and splicing semi tight buffered, easy strip, cable is used as standard. Cable preparation, termination and testing is carried out to strictly managed procedures in an Excel approved, ISO9001 registered manufacturing facility.

Each pigtail has a strain relief boot to prolong and maintain performance levels of the assembly. A short distance from the connector a label containing a unique batch number is fixed to cable for quality and traceability purposes.

This data sheet was generated at 1:30am 17th November 2026 and is subject to change at any time.

Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC 12-Colour Pack (TIA 598) 1 m

Part Code: 200-548

sales@excel-networking.com
excel-networking.com

Product Specifications

Feature	Values
Fibre type	**Single mode**
Category	**OS2**
Length	**1 m**
Type of connector	**LC**
APC-type	**no**
Colour	**Multi Coloured (TIA 598)**
Strain relief boot	**Push-on**

This data sheet was generated at 1:30am 17th November 2026 and is subject to change at any time.


Product schematics

This data sheet was generated at 1:30am 17th November 2026 and is subject to change at any time.

Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC 12-Colour Pack (TIA 598) 1 m


Part Code: 200-548

sales@excel-networking.com
excel-networking.com

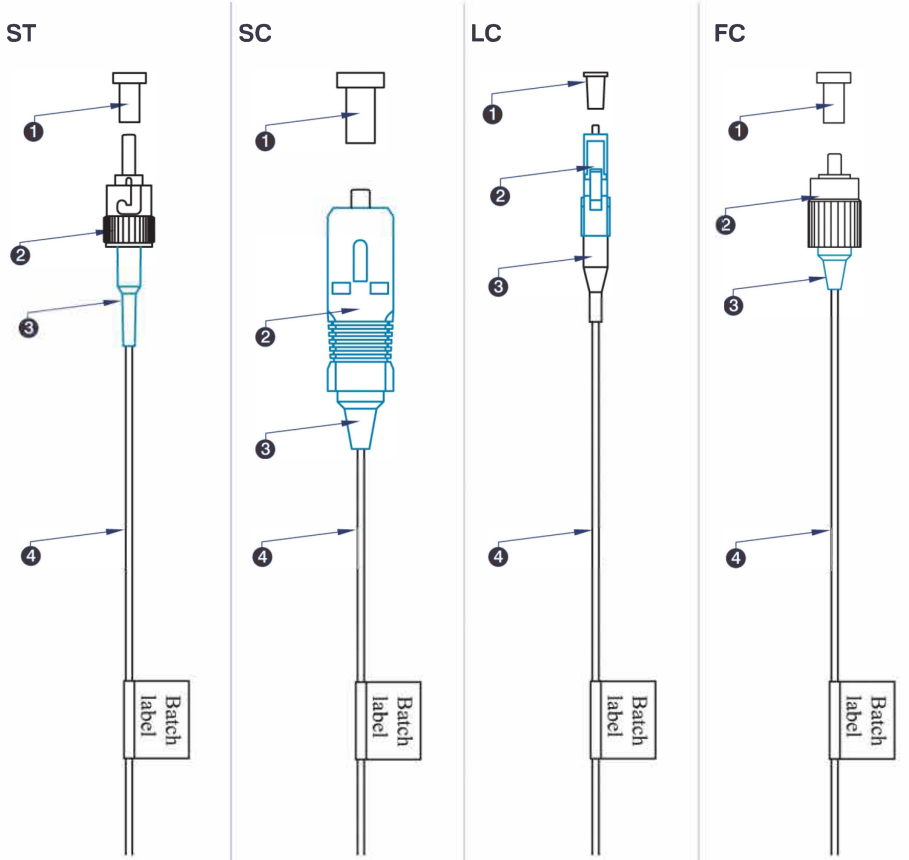


ST	SC	LC	FC
❶ ST Dust cover	❶ SC Dust cover	❶ LC Dust cover	❶ FC Dust cover
❷ ST connector	❷ SC connector	❷ LC connector	❷ FC connector
❸ ST Strain relief boot	❸ SC Strain relief boot	❸ LC Strain relief boot	❸ FC Strain relief boot
❹ Easy Strip LSOH cable	❹ Easy Strip LSOH cable	❹ Easy Strip LSOH cable	❹ Easy Strip LSOH cable

Cable Profile



Packaging

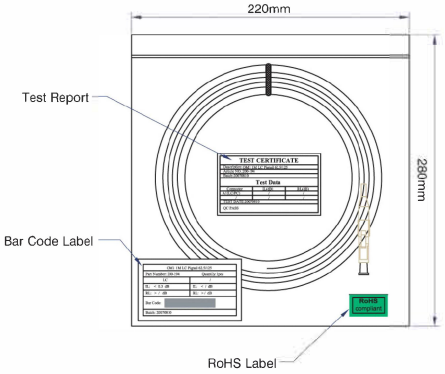

This data sheet was generated at 1:30am 17th November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

Cable specifications

Features	Values	ST Assemblies	SC Assemblies	LC Assemblies
Construction	**Semi-Tight Buffered**			
No. of Fibres	**1**			
Diameter	**900 micron**			
Temperature range	**-20C to +70C**			
Connector Material		**Nickel plated Brass**	**Composite**	**Composite**
Minimum bend radius	**10 x cable diameter**			
Connector Ferrule		**2.5 mm Zirconium ceramic**	**2.5 mm Zirconium ceramic**	**1.25 mm Zirconium ceramic**
Connector Insertion Loss	**Max. 0.3 dB**			
Connector Return Loss (Multimode)	**Max. -30 dB**			
Ferrule End Face (Singlemode UPC)	**Max. -50 dB**			
Ferrule End Face (Singlemode APC)	**Max. -60 dB**			

This data sheet was generated at 1:30am 17th November 2026 and is subject to change at any time.

Fibre specifications

Features	Values
Mode Field diameter at 1310 nm	**8.4-9.2 µm**
Mode Field diameter at 1550 nm	**9.3-10.3 µm**
Cladding diameter	**125.0±0.7 µm**
Cladding Non-circularity	**≤ 0.7 %**
Primary Coating diameter	**235-245 µm**
Coating-Cladding Concentricity Error	**≤ 12 µm**
Coating Non-circularity	**≤ 6.0 %**
Core-Cladding Concentricity Error	**≤ 0.5 µm**
Max. attenuation at 1310 nm	**≤ 0.35 dB/km**
Max. attenuation at 1383 nm	**≤ 0.35 dB/km**
Max. attenuation at 1460 nm	**≤ 0.25 dB/km**
Max. attenuation at 1490 nm	**≤ 0.23 dB/km**
Max attenuation at 1550 nm	**≤ 0.21 dB/km**
Max attenuation at 1625 nm	**≤ 0.23 dB/km**
PMD (typical value)	**0.04 ps/km**
Cut-off wavelength	**1260 nm**
Zero dispersion wavelength	**1300-1324 nm**
Zero dispersion slope	**≤0.092 ps/nm2.km**
Refractive Index at 1310 nm	**1.466**
Refractive Index at 1550 nm	**1.467**
Macro-Bend Loss - 10 turns, 15 mm radius, 1625 nm	**≤ 0.0 3dB**

This data sheet was generated at 1:30am 17th November 2026 and is subject to change at any time.

Macro-Bend Loss - 10 turns, 15 mm radius, 1550 nm	≤ **0.1 dB**
Macro-Bend Loss - 1 turn, 10 mm radius, 1550 nm	≤ **0.1 dB**
Macro-Bend Loss - 1 turn, 10 mm radius, 1625 nm	≤ **0.2 dB**
Macro-Bend Loss - 1 turn, 7.5 mm radius, 1550 nm	≤ **0.5 dB**
Macro-Bend Loss - 1 turn, 7.5 mm radius, 1625 nm	≤ **1.0 dB**

Standards

Applicable standard	Detail
BS EN 60332-1-2:2004+A11:2016	Tests on electric and optical fibre cables under fire conditions - Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 60793-1-1:2022	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-2:2015	Optical fibres - Part 2: Product specifications - General
IEC 60793-2-10:2017	Sectional specification for A1 multimode fibres
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
IEC 60793-1-31:2010	Optical fibres - Part 1-31: Measurement methods and test procedures - Tensile Strength
ITU-T G.652:2016	Characteristics of a single-mode optical fibre and cable

This data sheet was generated at 1:30am 17th November 2026 and is subject to change at any time.

ITU-T G.657:2016	Characteristics of a bending-loss insensitive single-mode optical fibre and cable
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance
IEC 61754-2:1996	Fibre optic connector interfaces - Part 2: Type BFOC/2,5 connector family
IEC 61754-4:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4: Type SC connector family
IEC 61754-4-100:2015	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4-100: Type SC connector family - Simplified receptacle SC-PC connector interfaces
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
ANSI/TIA 568-3.D	Optical Fiber Cabling and Components Standard
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the

This data sheet was generated at 1:30am 17th November 2026 and is subject to change at any time.

	Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Part Code Table

Part Code	Description
200-454	**Excel Enbeam Fibre Pigtail OS2 9/125 SC/UPC Tight Buffered 12-Colour Pack (TIA 598) 2 m**
200-455	**Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC Tight Buffered 12-Colour Pack (TIA 598) 2 m**
200-456	**Excel Enbeam Fibre Pigtail OS2 9/125 SC/APC Tight Buffered 12-Colour Pack (TIA 598) 2 m**
200-457	**Excel Enbeam Fibre Pigtail OS2 9/125 LC/APC Tight Buffered 12-Colour Pack (TIA 598) 2 m**
200-548	**Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC 12-Colour Pack (TIA 598) 1 m**
200-554	**Excel Enbeam Fibre Pigtail OS2 9/125 SC/UPC Yellow 2 m**
200-561	**Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC Yellow 2 m**
200-565	**Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC 12-Colour Pack (TIA 598) 0.5 m**
200-576	**Excel Enbeam Fibre Pigtail OS2 9/125 ST/UPC Yellow 2 m**
200-602	**Excel Enbeam Fibre Pigtail OS2 9/125 LC/UPC 12-Colour Pack (TIA 598) 2m**
200-723-12	**Excel Enbeam Fibre Pigtail OS2 9/125 SC/UPC Semi Loose Buffer Yellow 1 m (12-Pack)**

This data sheet was generated at 1:30am 17th November 2026 and is subject to change at any time.