


# Excel Enbeam Fibre Pigtail OM1 62.5/125 LC/UPC Grey 1 m (12-Pack)

Part Code: 200-639

sales@excel-networking.com  
excel-networking.com

CIBSE TM65 Embodied Carbon: 0.133 kg CO2e

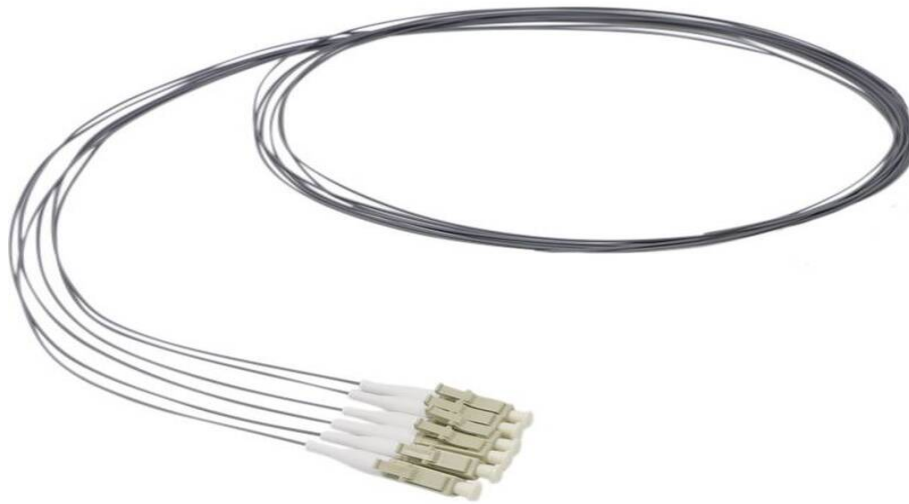

## Main Features

- / Semi Loose Buffered
- / Each cable is individually packaged and labelled
- / RoHS Compliant
- / Choice of connectors & lengths
- / Test Certificate with each cable
- / Bend insensitive construction

## Product Overview

Excel multimode fibre optic pigtails are manufactured from the highest quality 900 micron optical fibre, terminated with ceramic ferrule connectors of various types. To assist in fast cable preparation and splicing semi tight buffered, easy strip, cable is used as standard. Cable preparation, termination and testing is carried out to strictly managed procedures in an Excel approved, ISO9001 registered manufacturing facility.

Each pigtail has a strain relief boot to prolong and maintain performance levels of the assembly. A short distance from the connector a label containing a unique batch number is fixed to cable for quality and traceability purposes.

# Excel Enbeam Fibre Pigtail OM1 62.5/125 LC/UPC Grey 1 m (12-Pack)

Part Code: 200-639

sales@excel-networking.com  
excel-networking.com

## Product Specifications

Feature	Values
Fibre type	Multi mode 62.5/125
Category	OM1
Length	1 m
Type of connector	LC
APC-type	no
Colour	Grey
Strain relief boot	Push-on

Excel Enbeam Fibre Pigtail OM1 62.5/125 LC/UPC Grey 1 m  
(12-Pack)



Part Code: 200-639

sales@excel-networking.com  
excel-networking.com

## Product schematics

# Excel Enbeam Fibre Pigtail OM1 62.5/125 LC/UPC Grey 1 m (12-Pack)

Part Code: 200-639

sales@excel-networking.com  
excel-networking.com

## ST



- 1 ST Dust cover
- 2 ST connector
- 3 ST Strain relief boot
- 4 Easy Strip LSOH cable

## SC



- 1 SC Dust cover
- 2 SC connector
- 3 SC Strain relief boot
- 4 Easy Strip LSOH cable

## LC




- 1 LC Dust cover
- 2 LC connector
- 3 LC Strain relief boot
- 4 Easy Strip LSOH cable

## FC




- 1 FC Dust cover
- 2 FC connector
- 3 FC Strain relief boot
- 4 Easy Strip LSOH cable

## Cable Profile



## Packaging

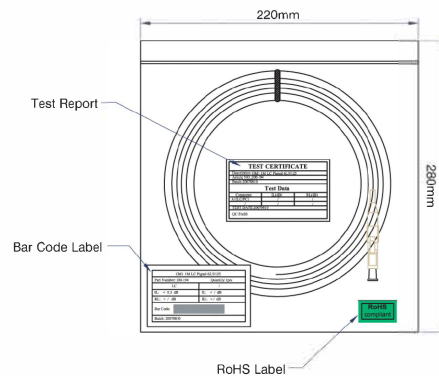

# Excel Enbeam Fibre Pigtail OM1 62.5/125 LC/UPC Grey 1 m (12-Pack)

Part Code: 200-639

sales@excel-networking.com  
excel-networking.com

## Fibre specifications

Features	OM1	OM2	OM3	OM4	OM5
Core diameter	62.5 ± 2.5µm	50 ± 2.5µm	50 ± 2.5µm	50 ± 2.5µm	50 ± 2.5µm
Core Non-circularity	≤5%	≤5%	≤5%	≤5%	≤5%
Core-Cladding Concentricity Error	≤1.5µm	≤1.5µm	≤1.0µm	≤1.0µm	≤1.0µm
Cladding diameter	125 ± 1.0µm	125 ± 1.0µm	125 ± 1.0µm	125 ± 1.0µm	125 ± 0.8µm
Cladding Non-circularity	≤1.0%	≤1.0%	≤1.0%	≤1.0%	≤0.6%
Primary Coating diameter	245 ± 7µm	245 ± 7µm	245 ± 7µm	245 ± 7µm	245 ± 7µm
Coating-Cladding Concentricity Error	≤10.0µm	≤10.0µm	≤10.0µm	≤10.0µm	≤10.0µm
Coating Non-circularity	≤6.0%	≤6.0%	≤6.0%	≤6.0%	≤6.0%
Secondary coating diameter	900 µm nominal	900 µm nominal	900 µm nominal	900 µm nominal	900 µm nominal
Max. attenuation at 850nm	2.7dB/km	2.3dB/km	2.4dB/km	2.4dB/km	2.4dB/km
Max. attenuation at 953nm					1.7dB/km
Max	0.6dB/km	0.6dB/km	0.6dB/km	0.6dB/km	0.6dB/km

# Excel Enbeam Fibre Pigtail OM1 62.5/125 LC/UPC Grey 1 m (12-Pack)

Part Code: 200-639

sales@excel-networking.com  
excel-networking.com

attenuation at 1300nm					
Refractive Index at 850nm	<b>1.496</b>	<b>1.482</b>	<b>1.482</b>	<b>1.482</b>	<b>1.482</b>
Refractive Index at 1300nm	<b>1.491</b>	<b>1.477</b>	<b>1.477</b>	<b>1.477</b>	<b>1.477</b>
Bandwidth at 850nm	<b>200 MHz.km</b>	<b>500 MHz.km</b>	<b>≥1500 MHz.km</b>	<b>≥3500 MHz.km</b>	<b>≥3500 MHz.km</b>
Bandwidth at 953nm					<b>≥1850 MHz.km</b>
Bandwidth at 1300nm	<b>500 MHz.km</b>	<b>500 MHz.km</b>	<b>≥500 MHz.km</b>	<b>≥500 MHz.km</b>	<b>≥500 MHz.km</b>
Effective Modal Bandwidth at 850nm			<b>≥2000 MHz/km</b>	<b>≥4700 MHz/km</b>	<b>≥4700 MHz/km</b>
Effective Modal Bandwidth at 953nm					<b>≥2470 MHz/km</b>
Numerical Aperture	<b>0.275 ±0.015</b>	<b>0.200 ±0.015</b>	<b>0.200 ±0.015</b>	<b>0.200 ±0.015</b>	<b>0.200 ±0.015</b>
Zero Dispersion Wavelength	<b>1320-1365nm</b>	<b>1295-1340nm</b>	<b>1295-1340nm</b>	<b>1295-1340nm</b>	<b>1295-1340nm</b>
Macrobending Loss - 100 turns, 37.5mm Radius, 850nm	<b>≤0.50dB</b>	<b>≤0.10dB</b>	<b>≤0.50dB</b>	<b>≤0.50dB</b>	<b>≤0.10dB</b>
Macrobending Loss - 100 turns, 37.5mm Radius,	<b>≤0.50dB</b>	<b>≤0.30dB</b>	<b>≤0.50dB</b>	<b>≤0.50dB</b>	<b>≤0.30dB</b>

# Excel Enbeam Fibre Pigtail OM1 62.5/125 LC/UPC Grey 1 m (12-Pack)

Part Code: 200-639

sales@excel-networking.com  
excel-networking.com

1300nm

Macrobending Loss - 2 turns, 7.5mm Radius, 850nm	≤0.2dB	≤1.0dB	≤1.0dB	≤0.2dB
Macrobending Loss - 2 turns, 7.5mm Radius, 1300nm	≤0.5dB	≤1.0dB	≤1.0dB	≤0.5dB

## Cable specifications

Features	Values	ST Assemblies	SC Assemblies	LC Assemblies
Construction	<b>Semi-Tight Buffered</b>			
No. of Fibres	<b>1</b>			
Diameter	<b>900 micron</b>			
Temperature range	<b>-20C to +70C</b>			
Connector Material		<b>Nickel plated Brass</b>	<b>Composite</b>	<b>Composite</b>
Minimum bend radius	<b>10 x cable diameter</b>			
Connector Ferrule		<b>2.5 mm Zirconium ceramic</b>	<b>2.5 mm Zirconium ceramic</b>	<b>1.25 mm Zirconium ceramic</b>
Connector Insertion Loss	<b>Max. 0.3 dB</b>			
Connector Return Loss (Multimode)	<b>Max. -30 dB</b>			

# Excel Enbeam Fibre Pigtail OM1 62.5/125 LC/UPC Grey 1 m (12-Pack)

Part Code: 200-639

sales@excel-networking.com  
excel-networking.com

Ferrule End Face (Singlemode UPC) **Max. -50 dB**

Ferrule End Face (Singlemode APC) **Max. -60 dB**

## Standards

Applicable standard	Detail
IEC 60793-1-1:2022	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-2:2015	Optical fibres - Part 2: Product specifications - General
IEC 60793-2-10:2017	Sectional specification for A1 multimode fibres
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
IEC 60793-1-31:2010	Optical fibres - Part 1-31: Measurement methods and test procedures - Tensile Strength
ITU-T G.651.1:2018	Characteristics of a 50/125 $\mu\text{m}$ multimode graded index optical fibre cable for the optical access network
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1:

# Excel Enbeam Fibre Pigtail OM1 62.5/125 LC/UPC Grey 1 m (12-Pack)

Part Code: 200-639

sales@excel-networking.com  
excel-networking.com

## General and guidance

IEC 61754-2:1996	Fibre optic connector interfaces - Part 2: Type BFOC/2,5 connector family
IEC 61754-4:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4: Type SC connector family
IEC 61754-4-100:2015	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4-100: Type SC connector family - Simplified receptacle SC-PC connector interfaces
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
ANSI/TIA 568-3.D	Optical Fiber Cabling and Components Standard
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

# Excel Enbeam Fibre Pigtail OM1 62.5/125 LC/UPC Grey 1 m (12-Pack)

Part Code: 200-639

sales@excel-networking.com  
excel-networking.com

## Part Code Table

Part Code	Description
200-637	Excel Enbeam Fibre Pigtail OM1 62.5/125 SC/UPC Grey 1 m (12-Pack)
200-638	Excel Enbeam Fibre Pigtail OM1 62.5/125 ST/UPC Grey 1 m (12-Pack)
200-639	Excel Enbeam Fibre Pigtail OM1 62.5/125 LC/UPC Grey 1 m (12-Pack)
200-640	Excel Enbeam Fibre Pigtail OM2 50/125 ST/UPC White 1 m (12-Pack)
200-641	Excel Enbeam Fibre Pigtail OM2 50/125 SC/UPC White 1 m (12-Pack)
200-642	Excel Enbeam Fibre Pigtail OM2 50/125 LC/UPC White 1 m (12-Pack)
200-643	Excel Enbeam Fibre Pigtail OM3 50/125 ST/UPC Aqua 1 m (12-Pack)
200-644	Excel Enbeam Fibre Pigtail OM3 50/125 SC/UPC Aqua 1 m (12-Pack)
200-645	Excel Enbeam Fibre Pigtail OM3 50/125 LC/UPC Aqua 1 m (12-Pack)
200-646	Excel Enbeam Fibre Pigtail OM4 50/125 SC/UPC Violet 1 m (12-Pack)
200-647	Excel Enbeam Fibre Pigtail OM4 50/125 LC/UPC Violet 1 m (12-Pack)