


Excel Enbeam Fibre Pigtail OM3 50/125 ST/UPC Aqua 1 m (12-Pack)

Part Code: 200-643

sales@excel-networking.com
excel-networking.com

CIBSE TM65 Embodied Carbon: 4.147 kg CO2e

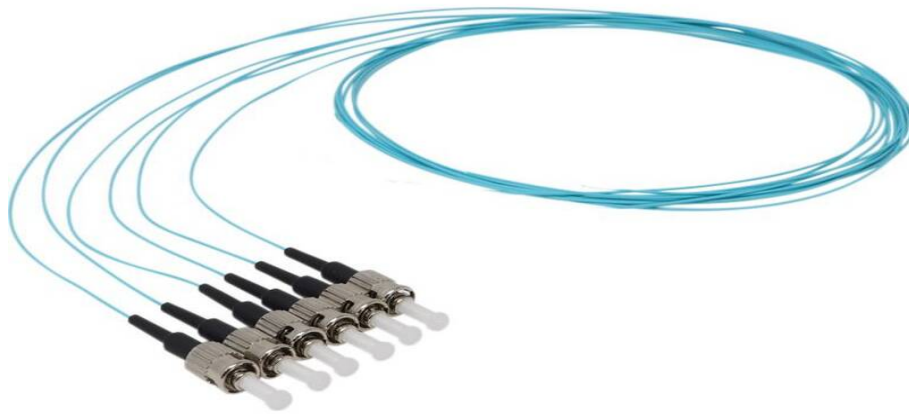

Main Features

- / Semi Loose Buffered
- / Each cable is individually packaged and labelled
- / RoHS Compliant
- / Choice of lengths and connectors
- / Test Certificate with each cable
- / Bend insensitive construction

Product Overview

Excel multimode fibre optic pigtails are manufactured from the highest quality 900 µm optical fibre, terminated with ceramic ferrule connectors of various types. To assist in fast cable preparation and splicing semi tight buffered, easy strip, cable is used as standard. Cable preparation, termination and testing is carried out to strictly managed procedures in an Excel approved, ISO9001 registered manufacturing facility.

Each pigtail has a strain relief boot to prolong and maintain performance levels of the assembly. A short distance from the connector a label containing a unique batch number is fixed to cable for quality and traceability purposes.

Excel Enbeam Fibre Pigtail OM3 50/125 ST/UPC Aqua 1 m (12-Pack)

Part Code: 200-643

sales@excel-networking.com
excel-networking.com

Product Specifications

| Feature | Values |
|--------------------|--------------------------|
| Fibre type | Multi mode 50/125 |
| Category | OM3 |
| Length | 1 m |
| Type of connector | ST |
| APC-type | no |
| Colour | Aqua |
| Strain relief boot | Push-on |

Excel Enbeam Fibre Pigtail OM3 50/125 ST/UPC Aqua 1 m
(12-Pack)



Part Code: 200-643

sales@excel-networking.com
excel-networking.com

Product schematics

Excel Enbeam Fibre Pigtail OM3 50/125 ST/UPC Aqua 1 m (12-Pack)

Part Code: 200-643


sales@excel-networking.com
excel-networking.com

ST



- ① ST Dust cover
- ② ST connector
- ③ ST Strain relief boot
- ④ Easy Strip LSOH cable

SC

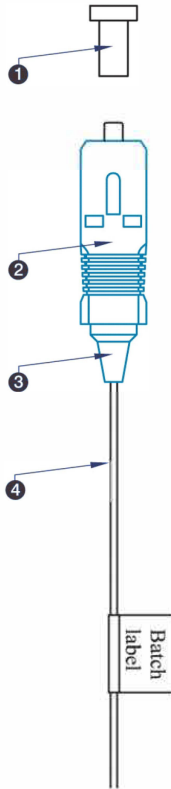

- ① SC Dust cover
- ② SC connector
- ③ SC Strain relief boot
- ④ Easy Strip LSOH cable

LC



- ① LC Dust cover
- ② LC connector
- ③ LC Strain relief boot
- ④ Easy Strip LSOH cable

FC



- ① FC Dust cover
- ② FC connector
- ③ FC Strain relief boot
- ④ Easy Strip LSOH cable

Cable Profile



Packaging



Excel Enbeam Fibre Pigtail OM3 50/125 ST/UPC Aqua 1 m (12-Pack)

Part Code: 200-643

sales@excel-networking.com
excel-networking.com

Fibre specifications

| Features | OM1 | OM2 | OM3 | OM4 | OM5 |
|--------------------------------------|----------------|----------------|----------------|----------------|----------------|
| Core diameter | 62.5 ± 2.5µm | 50 ± 2.5µm | 50 ± 2.5µm | 50 ± 2.5µm | 50 ± 2.5µm |
| Core Non-circularity | ≤5% | ≤5% | ≤5% | ≤5% | ≤5% |
| Core-Cladding Concentricity Error | ≤1.5µm | ≤1.5µm | ≤1.0µm | ≤1.0µm | ≤1.0µm |
| Cladding diameter | 125 ± 1.0µm | 125 ± 1.0µm | 125 ± 1.0µm | 125 ± 1.0µm | 125 ± 0.8µm |
| Cladding Non-circularity | ≤1.0% | ≤1.0% | ≤1.0% | ≤1.0% | ≤0.6% |
| Primary Coating diameter | 245 ± 7µm | 245 ± 7µm | 245 ± 7µm | 245 ± 7µm | 245 ± 7µm |
| Coating-Cladding Concentricity Error | ≤10.0µm | ≤10.0µm | ≤10.0µm | ≤10.0µm | ≤10.0µm |
| Coating Non-circularity | ≤6.0% | ≤6.0% | ≤6.0% | ≤6.0% | ≤6.0% |
| Secondary coating diameter | 900 µm nominal | 900 µm nominal | 900 µm nominal | 900 µm nominal | 900 µm nominal |
| Max. attenuation at 850nm | 2.7dB/km | 2.3dB/km | 2.4dB/km | 2.4dB/km | 2.4dB/km |
| Max. attenuation at 953nm | | | | | 1.7dB/km |
| Max | 0.6dB/km | 0.6dB/km | 0.6dB/km | 0.6dB/km | 0.6dB/km |

Excel Enbeam Fibre Pigtail OM3 50/125 ST/UPC Aqua 1 m (12-Pack)

Part Code: 200-643

sales@excel-networking.com
excel-networking.com

| | | | | | |
|--|-------------------------|-------------------------|-------------------------|-------------------------|--------------------------|
| attenuation at 1300nm | | | | | |
| Refractive Index at 850nm | 1.496 | 1.482 | 1.482 | 1.482 | 1.482 |
| Refractive Index at 1300nm | 1.491 | 1.477 | 1.477 | 1.477 | 1.477 |
| Bandwidth at 850nm | 200 MHz.km | 500 MHz.km | ≥1500 MHz.km | ≥3500 MHz.km | ≥3500 MHz.km |
| Bandwidth at 953nm | | | | | ≥1850 MHz.km |
| Bandwidth at 1300nm | 500 MHz.km | 500 MHz.km | ≥500 MHz.km | ≥500 MHz.km | ≥500 MHz.km |
| Effective Modal Bandwidth at 850nm | | | ≥2000 MHz/km | ≥4700 MHz/km | ≥4700 MHz/km |
| Effective Modal Bandwidth at 953nm | | | | | ≥2470 MHz/km |
| Numerical Aperture | 0.275 ±0.015 | 0.200 ±0.015 | 0.200 ±0.015 | 0.200 ±0.015 | 0.200 ± 0.015 |
| Zero Dispersion Wavelength | 1320-1365n m | 1295-1340n m | 1295-1340n m | 1295-1340n m | 1295-1340n m |
| Macrobendin g Loss- 100 turns, 37.5mm Radius, 850nm | ≤0.50dB | ≤0.10dB | ≤0.50dB | ≤0.50dB | ≤0.10dB |
| Macrobendin g Loss- 100 turns, 37.5mm Radius, | ≤0.50dB | ≤0.30dB | ≤0.50dB | ≤0.50dB | ≤0.30dB |

Excel Enbeam Fibre Pigtail OM3 50/125 ST/UPC Aqua 1 m (12-Pack)

Part Code: 200-643

sales@excel-networking.com
excel-networking.com

1300nm

| | | | | |
|---|--------|--------|--------|--------|
| Macrobending Loss - 2 turns, 7.5mm Radius, 850nm | ≤0.2dB | ≤1.0dB | ≤1.0dB | ≤0.2dB |
| Macrobending Loss - 2 turns, 7.5mm Radius, 1300nm | ≤0.5dB | ≤1.0dB | ≤1.0dB | ≤0.5dB |

Cable specifications

| Features | Values | ST Assemblies | SC Assemblies | LC Assemblies |
|-----------------------------------|----------------------------|---------------------------------|---------------------------------|----------------------------------|
| Construction | Semi-Tight Buffered | | | |
| No. of Fibres | 1 | | | |
| Diameter | 900 micron | | | |
| Temperature range | -20C to +70C | | | |
| Connector Material | | Nickel plated Brass | Composite | Composite |
| Minimum bend radius | 10 x cable diameter | | | |
| Connector Ferrule | | 2.5 mm Zirconium ceramic | 2.5 mm Zirconium ceramic | 1.25 mm Zirconium ceramic |
| Connector Insertion Loss | Max. 0.3 dB | | | |
| Connector Return Loss (Multimode) | Max. -30 dB | | | |

Excel Enbeam Fibre Pigtail OM3 50/125 ST/UPC Aqua 1 m (12-Pack)

Part Code: 200-643

sales@excel-networking.com
excel-networking.com

Ferrule End Face (Singlemode UPC) **Max. -50 dB**

Ferrule End Face (Singlemode APC) **Max. -60 dB**

Standards

| Applicable standard | Detail |
|---------------------------|--|
| IEC 60793-1-1:2022 | Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance |
| IEC 60793-2:2015 | Optical fibres - Part 2: Product specifications - General |
| IEC 60793-2-10:2017 | Sectional specification for A1 multimode fibres |
| IEC 60793-1-20:2014 | Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry |
| IEC 60793-1-21:2001 | Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry |
| IEC 60793-1-22:2001 | Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement |
| IEC 60793-1-30:2010 | Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test |
| IEC 60793-1-31:2010 | Optical fibres - Part 1-31: Measurement methods and test procedures - Tensile Strength |
| ITU-T G.651.1:2018 | Characteristics of a 50/125 µm multimode graded index optical fibre cable for the optical access network |
| EN 50173-1:2018 | Information technology. Generic cabling systems - General requirements |
| EN 50173-2:2007 + A1:2010 | Information technology. Generic cabling systems - Office premises |
| IEC 61754-1:2013 | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: |

Excel Enbeam Fibre Pigtail OM3 50/125 ST/UPC Aqua 1 m (12-Pack)

Part Code: 200-643

sales@excel-networking.com
excel-networking.com

General and guidance

| | |
|------------------------------------|--|
| IEC 61754-2:1996 | Fibre optic connector interfaces - Part 2: Type BFOC/2,5 connector family |
| IEC 61754-4:2013 | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4: Type SC connector family |
| IEC 61754-4-100:2015 | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4-100: Type SC connector family - Simplified receptacle SC-PC connector interfaces |
| Directive 2011/65/EU (RoHS II) | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states). |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant. |
| ANSI/TIA 568-3.D | Optical Fiber Cabling and Components Standard |
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| Directive 2008/98/EC (WFD) | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988). |
| ECHA SCIP Database | Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH. |
| Regulation (EU) 2019/1021 (POPs) | EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355). |
| UK SI 2012 No. 3032 | The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019. |

Excel Enbeam Fibre Pigtail OM3 50/125 ST/UPC Aqua 1 m (12-Pack)

Part Code: 200-643

sales@excel-networking.com
excel-networking.com

Part Code Table

| Part Code | Description |
|-----------|---|
| 200-637 | Excel Enbeam Fibre Pigtail OM1 62.5/125 SC/UPC Grey 1 m (12-Pack) |
| 200-638 | Excel Enbeam Fibre Pigtail OM1 62.5/125 ST/UPC Grey 1 m (12-Pack) |
| 200-639 | Excel Enbeam Fibre Pigtail OM1 62.5/125 LC/UPC Grey 1 m (12-Pack) |
| 200-640 | Excel Enbeam Fibre Pigtail OM2 50/125 ST/UPC White 1 m (12-Pack) |
| 200-641 | Excel Enbeam Fibre Pigtail OM2 50/125 SC/UPC White 1 m (12-Pack) |
| 200-642 | Excel Enbeam Fibre Pigtail OM2 50/125 LC/UPC White 1 m (12-Pack) |
| 200-643 | Excel Enbeam Fibre Pigtail OM3 50/125 ST/UPC Aqua 1 m (12-Pack) |
| 200-644 | Excel Enbeam Fibre Pigtail OM3 50/125 SC/UPC Aqua 1 m (12-Pack) |
| 200-645 | Excel Enbeam Fibre Pigtail OM3 50/125 LC/UPC Aqua 1 m (12-Pack) |
| 200-646 | Excel Enbeam Fibre Pigtail OM4 50/125 SC/UPC Violet 1 m (12-Pack) |
| 200-647 | Excel Enbeam Fibre Pigtail OM4 50/125 LC/UPC Violet 1 m (12-Pack) |