


# Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 3 m

excel  
without compromise.

Part Code: 200-682

sales@excel-networking.com  
excel-networking.com

CIBSE TM65 Embodied Carbon: 0.160 kg CO2e

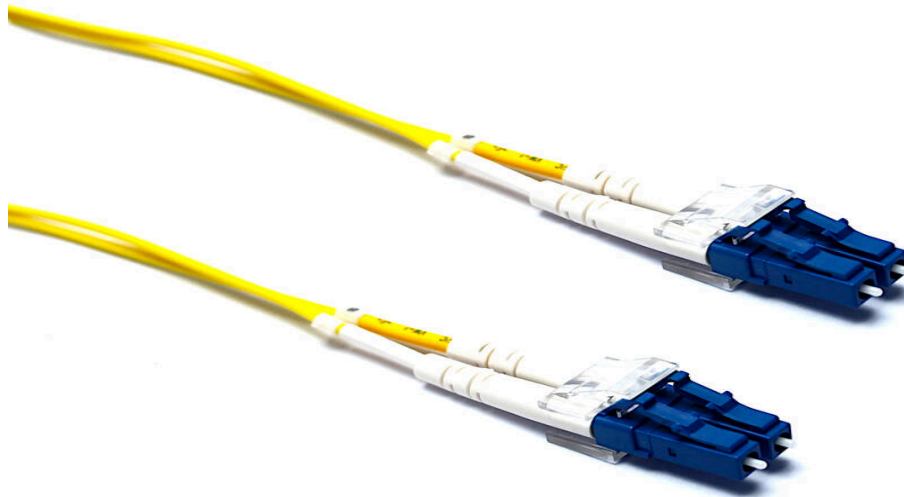

## Main Features

- / 100% optically tested
- / Low loss connectors
- / Polarity changeable (duplex connectors)
- / Test certificate included
- / Zirconia ceramic UPC ferrules
- / Bend insensitive construction

## Product Overview

Excel OS2 9/125 µm duplex patch leads are manufactured from the highest quality 900 µm buffer/jacket optical fibre, terminated with ceramic ferrule connectors. Each cable has strain relief boots to prolong and maintain performance levels of the assembly, transmit and receive 'legs' of each duplex cable are identified by means of ring type cable marker fixed to each end the assembly.

A short distance from these identification rings heat shrink is applied to maintain an easy to manage bonded two fibre cable, finally a label containing a unique batch number is fixed to the centre of cable for quality and traceability purposes.

# Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 3 m

Part Code: 200-682

sales@excel-networking.com  
excel-networking.com

## Product Specifications

| Feature                                    | Values      |
|--|-------------|
| Fibre type                                 | Single mode |
| Category                                   | OS2         |
| Number of Cores                            | 2           |
| Outer diameter sheath single fibre         | 1.8 mm      |
| Cable type                                 | Duplex      |
| Length                                     | 3 m         |
| Type of connector connection 1             | LC          |
| Type of connector connection 2             | LC          |
| Outer sheath colour                        | Yellow      |
| Strain relief boot                         | Push-on     |
| Flame retardant according to IEC 60332-1-2 | yes         |
| Low smoke (acc. IEC 61034-2)               | yes         |

Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC  
Singlemode 9/125 DX LSZH Yellow 3 m


Part Code: 200-682

sales@excel-networking.com  
excel-networking.com

Cross-section diagram



Product drawing

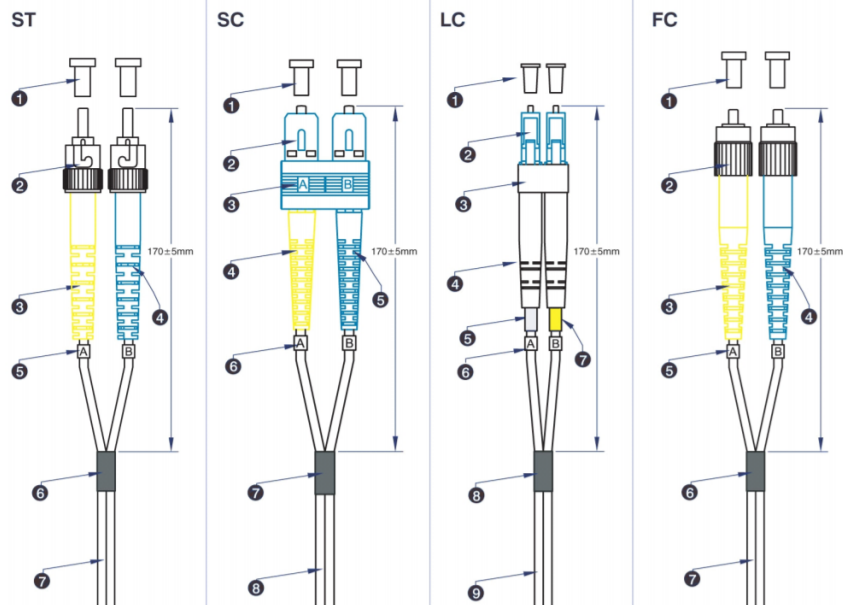

# Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 3 m

Part Code: 200-682

sales@excel-networking.com  
excel-networking.com

## Cable specifications

| Features                     | Values                     | SC Assemblies                  | LC Assemblies                   |
|------------------------------|----------------------------|--------------------------------|---------------------------------|
| Cable Construction           | <b>Duplex zip-cord</b>     |                                |                                 |
| No. of Fibres                | <b>2</b>                   |                                |                                 |
| Cable Dimensions             |                            | <b>2.8 x 5.7mm</b>             | <b>2.0 x 4.0mm</b>              |
| Colour                       | <b>Yellow</b>              |                                |                                 |
| Strength members             | <b>Aramid Yarn</b>         |                                |                                 |
| Temperature range            | <b>-20C to +70C</b>        |                                |                                 |
| Connector Material           |                            | <b>Composite</b>               | <b>Composite</b>                |
| Minimum bend radius (loaded) | <b>10 x cable diameter</b> |                                |                                 |
| Connector Ferrule            |                            | <b>2.5mm Zirconium ceramic</b> | <b>1.25mm Zirconium ceramic</b> |
| Ferrule End Face             | <b>UPC Polish</b>          |                                |                                 |
| Connector Insertion Loss     | <b>Max. 0.3dB</b>          |                                |                                 |

## Fibre specifications

| Features                      | Values               |
|-------------------------------|----------------------|
| Mode Field diameter at 1310nm | <b>8.4 - 9.2µm</b>   |
| Mode Field diameter at 1550nm | <b>9.3-10.3µm</b>    |
| Cladding diameter             | <b>125.0 ± 0.7µm</b> |
| Cladding Non-circularity      | <b>≤ 0.7%</b>        |
| Primary Coating diameter      | <b>235 - 245µm</b>   |

# Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 3 m

Part Code: 200-682

sales@excel-networking.com  
excel-networking.com

|   |                               |
|---|-------------------------------|
| Coating-Cladding Concentricity Error            | ≤ 12µm                        |
| Coating Non-circularity                         | ≤ 6.0%                        |
| Core-Cladding Concentricity Error               | ≤0.5µm                        |
| Max. attenuation at 1310nm                      | ≤0.35 dB/km                   |
| Max. attenuation at 1383nm                      | ≤0.35 dB/km                   |
| Max. attenuation at 1460nm                      | ≤0.25 dB/km                   |
| Max. attenuation at 1490nm                      | ≤0.23 dB/km                   |
| Max attenuation at 1550nm                       | ≤0.21 dB/km                   |
| Max attenuation at 1625nm                       | ≤0.23 dB/km                   |
| PMD (typical value)                             | 0.04 ps/km                    |
| Cut-off wavelength                              | 1260nm                        |
| Zero dispersion wavelength                      | 1300-1324 nm                  |
| Zero dispersion slope                           | ≤0.092 ps/nm <sup>2</sup> .km |
| Refractive Index at 1310nm                      | 1.466                         |
| Refractive Index at 1550nm                      | 1.467                         |
| Macro-Bend Loss - 10 turns, 15mm radius, 1625nm | ≤0.03dB                       |
| Macro-Bend Loss - 10 turns, 15mm radius, 1550nm | ≤0.1dB                        |
| Macro-Bend Loss - 1 turn, 10mm radius, 1550nm   | ≤0.1dB                        |
| Macro-Bend Loss - 1 turn, 10mm radius, 1625nm   | ≤0.2dB                        |
| Macro-Bend Loss - 1 turn, 7.5mm radius, 1550nm  | ≤0.5dB                        |
| Macro-Bend Loss - 1 turn, 7.5mm radius, 1625nm  | ≤1.0dB                        |
| Coating Strip Force (typical)                   | 1.5N                          |
| Coating Strip Force (peak)                      | 13 - 8.9N                     |

# Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 3 m

Part Code: 200-682

sales@excel-networking.com  
excel-networking.com

## Standards

| Applicable standard           | Detail  |
|-------------------------------|---|
| BS EN 60332-1-2:2004+A11:2016 | Tests on electric and optical fibre cables under fire conditions - Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame |
| IEC 60793-1-1:2022            | Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance   |
| IEC 60793-2:2015              | Optical fibres - Part 2: Product specifications - General   |
| IEC 60793-2-10:2017           | Sectional specification for A1 multimode fibres   |
| IEC 60793-1-20:2014           | Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry  |
| IEC 60793-1-21:2001           | Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry  |
| IEC 60793-1-22:2001           | Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement  |
| IEC 60793-1-30:2010           | Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test  |
| IEC 60793-1-31:2010           | Optical fibres - Part 1-31: Measurement methods and test procedures - Tensile Strength  |
| ITU-T G.652:2016              | Characteristics of a single-mode optical fibre and cable  |
| ITU-T G.657:2016              | Characteristics of a bending-loss insensitive single-mode optical fibre and cable   |
| EN 50173-1:2018               | Information technology. Generic cabling systems - General requirements  |
| EN 50173-2:2007 + A1:2010     | Information technology. Generic cabling systems - Office premises   |
| IEC 61754-1:2013              | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance  |

# Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 3 m

Part Code: 200-682

sales@excel-networking.com  
excel-networking.com

|                                    |  |
|------------------------------------|--|
| IEC 61754-2:1996                   | Fibre optic connector interfaces - Part 2: Type BFOC/2,5 connector family  |
| IEC 61754-4:2013                   | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4: Type SC connector family   |
| IEC 61754-4-100:2015               | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4-100: Type SC connector family - Simplified receptacle SC-PC connector interfaces  |
| IEC 61754-20:2012                  | Fibre optic connector interfaces - Part 20: Type LC connector family   |
| ISO/IEC 11801-1:2017               | Information technology - Generic cabling for customer premises: Part 1 General Requirements  |
| Directive 2011/65/EU (RoHS II)     | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).   |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.   |
| Directive 2008/98/EC (WFD)         | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).   |
| ECHA SCIP Database                 | Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.  |
| Regulation (EU) 2019/1021 (POPs)   | EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).   |
| UK SI 2012 No. 3032                | The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019. |

# Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 3 m

Part Code: 200-682

sales@excel-networking.com  
excel-networking.com

## Part Code Table

| Part Code | Description  |
|-----------|--|
| 200-096   | Excel Enbeam OS2 Fibre Optic Patch Lead LC-SC Singlemode 9/125 DX LS0H Yellow 20 m |
| 200-097   | Excel Enbeam OS2 Fibre Optic Patch Lead LC-SC Singlemode 9/125 DX LS0H Yellow 15 m |
| 200-098   | Excel Enbeam OS2 Fibre Optic Patch Lead LC-SC Singlemode 9/125 DX LS0H Yellow 10 m |
| 200-099   | Excel Enbeam OS2 Fibre Optic Patch Lead LC-ST Singlemode 9/125 DX LS0H Yellow 10 m |
| 200-100   | Excel Enbeam OS2 Fibre Optic Patch Lead LC-ST Singlemode 9/125 DX LS0H Yellow 15 m |
| 200-101   | Excel Enbeam OS2 Fibre Optic Patch Lead LC-ST Singlemode 9/125 DX LS0H Yellow 20 m |
| 200-102   | Excel Enbeam OS2 Fibre Optic Patch Lead SC-SC Singlemode 9/125 DX LS0H Yellow 10 m |
| 200-103   | Excel Enbeam OS2 Fibre Optic Patch Lead SC-SC Singlemode 9/125 DX LS0H Yellow 15 m |
| 200-104   | Excel Enbeam OS2 Fibre Optic Patch Lead SC-SC Singlemode 9/125 DX LS0H Yellow 20 m |
| 200-105   | Excel Enbeam OS2 Fibre Optic Patch Lead ST-SC Singlemode 9/125 DX LS0H Yellow 15 m |
| 200-107   | Excel Enbeam OS2 Fibre Optic Patch Lead ST-ST Singlemode 9/125 DX LS0H Yellow 10 m |
| 200-108   | Excel Enbeam OS2 Fibre Optic Patch Lead ST-ST Singlemode 9/125 DX LS0H Yellow 15 m |
| 200-109   | Excel Enbeam OS2 Fibre Optic Patch Lead ST-ST Singlemode 9/125 DX LS0H Yellow 20 m |
| 200-201   | Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 10 m |

# Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 3 m

Part Code: 200-682

sales@excel-networking.com  
excel-networking.com

|         |  |
|---------|--|
| 200-203 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 15 m |
| 200-205 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 20 m |
| 200-251 | Excel Enbeam OS2 Fibre Optic Patch Lead ST-ST Singlemode 9/125 DX LS0H Yellow 1 m  |
| 200-252 | Excel Enbeam OS2 Fibre Optic Patch Lead ST-ST Singlemode 9/125 DX LS0H Yellow 2 m  |
| 200-253 | Excel Enbeam OS2 Fibre Optic Patch Lead ST-ST Singlemode 9/125 DX LS0H Yellow 3 m  |
| 200-254 | Excel Enbeam OS2 Fibre Optic Patch Lead ST-ST Singlemode 9/125 DX LS0H Yellow 5 m  |
| 200-255 | Excel Enbeam OS2 Fibre Optic Patch Lead ST-SC Singlemode 9/125 DX LS0H Yellow 1 m  |
| 200-256 | Excel Enbeam OS2 Fibre Optic Patch Lead ST-SC Singlemode 9/125 DX LS0H Yellow 2 m  |
| 200-257 | Excel Enbeam OS2 Fibre Optic Patch Lead ST-SC Singlemode 9/125 DX LS0H Yellow 3 m  |
| 200-259 | Excel Enbeam OS2 Fibre Optic Patch Lead ST-SC Singlemode 9/125 DX LS0H Yellow 5 m  |
| 200-261 | Excel Enbeam OS2 Fibre Optic Patch Lead SC-SC Singlemode 9/125 DX LS0H Yellow 1 m  |
| 200-262 | Excel Enbeam OS2 Fibre Optic Patch Lead SC-SC Singlemode 9/125 DX LS0H Yellow 2 m  |
| 200-263 | Excel Enbeam OS2 Fibre Optic Patch Lead SC-SC Singlemode 9/125 DX LS0H Yellow 3 m  |
| 200-264 | Excel Enbeam OS2 Fibre Optic Patch Lead SC-SC Singlemode 9/125 DX LS0H Yellow 5 m  |
| 200-268 | Excel Enbeam OS2 Fibre Optic Patch Lead ST-SC Singlemode 9/125 DX LS0H Yellow 10 m |
| 200-501 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-FC Singlemode 9/125 DX LS0H Yellow 1 m  |
| 200-502 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-FC Singlemode 9/125 DX LS0H             |

# Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 3 m

Part Code: 200-682

sales@excel-networking.com  
excel-networking.com

## Yellow 2 m

|         |  |
|---------|--|
| 200-503 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-FC Singlemode 9/125 DX LS0H Yellow 3 m  |
| 200-504 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-FC Singlemode 9/125 DX LS0H Yellow 5 m  |
| 200-505 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-FC Singlemode 9/125 DX LS0H Yellow 10 m |
| 200-511 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-ST Singlemode 9/125 DX LS0H Yellow 2 m  |
| 200-513 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-ST Singlemode 9/125 DX LS0H Yellow 5 m  |
| 200-514 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-ST Singlemode 9/125 DX LS0H Yellow 10 m |
| 200-515 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-ST Singlemode 9/125 DX LS0H Yellow 15 m |
| 200-517 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-ST Singlemode 9/125 DX LS0H Yellow 1 m  |
| 200-534 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-SC Singlemode 9/125 DX LS0H Yellow 1 m  |
| 200-535 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-SC Singlemode 9/125 DX LS0H Yellow 2 m  |
| 200-536 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-SC Singlemode 9/125 DX LS0H Yellow 3 m  |
| 200-537 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-SC Singlemode 9/125 DX LS0H Yellow 5 m  |
| 200-538 | Excel Enbeam OS2 Fibre Optic Patch Lead FC-SC Singlemode 9/125 DX LS0H Yellow 10 m |
| 200-678 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 1 m  |
| 200-680 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 2 m  |
| 200-682 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 3 m  |

# Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 3 m

Part Code: 200-682

sales@excel-networking.com  
excel-networking.com

|         |   |
|---------|---|
| 200-684 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 5 m   |
| 200-686 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-SC Singlemode 9/125 DX LS0H Yellow 1 m   |
| 200-688 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-SC Singlemode 9/125 DX LS0H Yellow 2 m   |
| 200-690 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-SC Singlemode 9/125 DX LS0H Yellow 3 m   |
| 200-692 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-SC Singlemode 9/125 DX LS0H Yellow 5 m   |
| 200-694 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-ST Singlemode 9/125 DX LS0H Yellow 1 m   |
| 200-696 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-ST Singlemode 9/125 DX LS0H Yellow 2 m   |
| 200-698 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-ST Singlemode 9/125 DX LS0H Yellow 3 m   |
| 200-699 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-ST Singlemode 9/125 DX LS0H Yellow 5 m   |
| 202-172 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 0.5 m |
| 202-175 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC Singlemode 9/125 DX LS0H Yellow 30 m  |
| 202-179 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-SC Singlemode 9/125 DX LS0H Yellow 0.5 m |
| 202-182 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-SC Singlemode 9/125 DX LS0H Yellow 30 m  |
| 202-185 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-ST Singlemode 9/125 DX LS0H Yellow 0.5 m |
| 202-188 | Excel Enbeam OS2 Fibre Optic Patch Lead LC-ST Singlemode 9/125 DX LS0H Yellow 30 m  |
| 202-192 | Excel Enbeam OS2 Fibre Optic Patch Lead SC-SC Singlemode 9/125 DX LS0H Yellow 0.5 m |

Excel Enbeam OS2 Fibre Optic Patch Lead LC-LC  
Singlemode 9/125 DX LS0H Yellow 3 m

Part Code: 200-682

sales@excel-networking.com  
excel-networking.com

202-195

Excel Enbeam OS2 Fibre Optic Patch Lead SC-SC Singlemode 9/125 DX LS0H  
Yellow 30 m

202-198

Excel Enbeam OS2 Fibre Optic Patch Lead ST-ST Singlemode 9/125 DX LS0H  
Yellow 0.5 m