

Excel Enbeam 19" 24 Port Tube Distribution Panel for 5 mm Blown Tube

Part Code: 200-949

sales@excel-networking.com
excel-networking.com

CIBSE TM65 Embodied Carbon: 2.290 kg CO2e



Main Features

- / 19" Rack mountable
- / 24 Tube positions
- / Vertical or horizontal options
- / Compatible with Enbeam 5 mm pushfit bulkhead connector
- / CIBSE TM65 Embodied Carbon: 2.290 kg CO2e

Product Overview

The Enbeam range of tube distribution panels have been designed for use with the Enbeam blown fibre system microduct. These panels allows up to 48 x 5mm tubes to be connected and redistributed within the network. The straight through couplers can be fitted to requirements as the system grows.

Product Specifications

| Feature | Values |
|---------|--------|
|---------|--------|

Excel Enbeam 19" 24 Port Tube Distribution Panel for 5 mm Blown Tube

Part Code: 200-949

sales@excel-networking.com
excel-networking.com

| | |
|---------------------------|------------------------------------|
| Colour | Black |
| RAL-number | 9005 |
| Mounting method | 482.6 mm (19 inch) mounting |
| Number of rack units (RU) | 1 |
| Height | 43.8 mm |
| Width | 482 mm |
| Depth | 39 mm |

Additional specifications


| Features | Values |
|-----------------------|--------------------------|
| Operating Temperature | -40 to +80 °C |
| Material | Cold rolled steel |
| Material Thickness | 1.5 mm |
| Material Coating | Powder Coating |

Excel Enbeam 19" 24 Port Tube Distribution Panel for 5 mm Blown Tube

Part Code: 200-949

sales@excel-networking.com
excel-networking.com

Product drawing

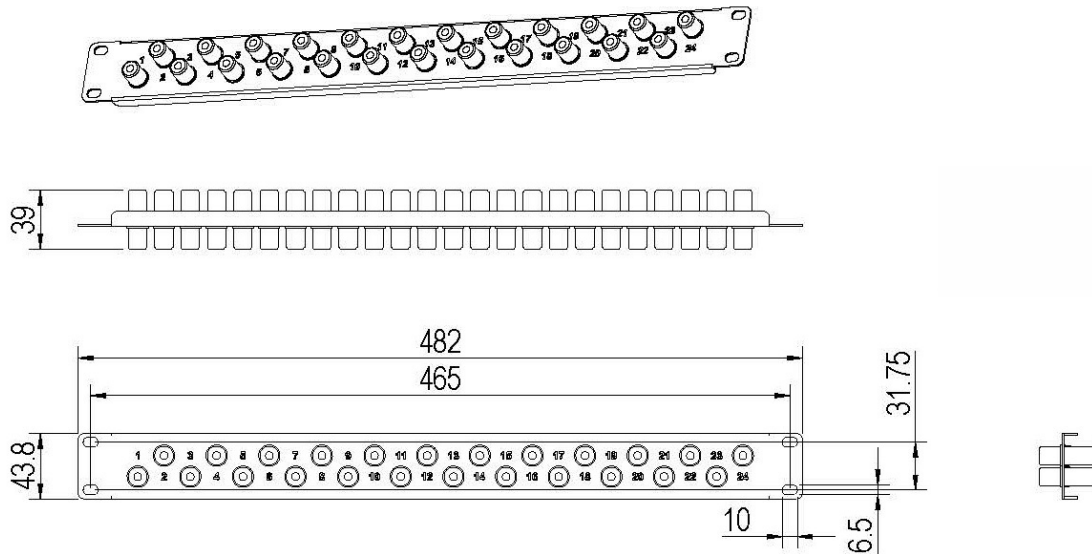

Included accessories

| Accessories | Quantity |
|-------------------|----------|
| cage nut and bolt | 4 |

Standards

| Applicable standard | Detail |
|------------------------------------|--|
| Directive 2011/65/EU (RoHS II) | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states). |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant. |
| IEC 61754-1:2013 | Fibre optic interconnecting devices and passive |

Excel Enbeam 19" 24 Port Tube Distribution Panel for 5 mm Blown Tube

Part Code: 200-949

sales@excel-networking.com
excel-networking.com

| | |
|----------------------------------|--|
| | components - Fibre optic connector interfaces - Part 1: General and guidance |
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| EN 50173-1:2018 | Information technology. Generic cabling systems - General requirements |
| Directive 2008/98/EC (WFD) | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988). |
| ECHA SCIP Database | Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH. |
| Regulation (EU) 2019/1021 (POPs) | EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355). |
| UK SI 2012 No. 3032 | The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019. |

Part Code Table

| Part Code | Description |
|-----------|---|
| 200-949 | Excel Enbeam 19" 24 Port Tube Distribution Panel for 5 mm Blown Tube |