





Product Overview

The Excel range of SC patch panels are sliding drawer "tray style" housings suitable for either direct termination or splicing of up to 48 fibres in 1U of rack space. Each panel is manufactured from high quality 2 mm thick steel powder coat finish to provide a strong and durable unit.

To the front of the patch panel the specified number of duplex adaptors are loaded from left to right. Each panel utilises colour coded adaptors, beige, aqua and violet for multimode, blue for singlemode and green for SM APC. Each duplex adaptor accommodates two terminated fibres.

Each panel has included within it a set of fixing brackets, and a cable management pack which includes cable entry glands, cable ties, and a 24 way splice bridge.

Note that SC panels can be assembled to order using a combination of adaptors, pigtails and splice cassettes - call to enquire.

Product Specifications

| Feature | Values |
|---------------------------------------|-----------|
| Suitable for number of fibre cores | 48 |
| Suitable for number of module inserts | 24 |
| With pigtails | no |
| APC-type | no |
| Type of connector external | LC-Duplex |

Excel Enbeam 24 Way SC Simplex/LC Duplex Fibre Optic Panel Empty

Item Code: 200-952



| Type of connector interior | LC-Duplex |
|----------------------------|-----------------------------|
| Colour | Black |
| RAL-number | 9005 |
| Mounting method | 482.6 mm (19 inch) mounting |
| Number of rack units (RU) | 1 |
| Height | 43.5 mm |
| Width | 483 mm |
| Depth | 219.5 mm |

Additional specifications

| Feature | Value |
|-----------------------------|---|
| Operating Temprature | -40 to +80 °C |
| IP Rating | IP20 |
| Cable Entry 20mm | 2 |
| Cable Entry 25mm | 2 |
| Material | Cold rolled steel |
| Material Thickness | 2mm |
| Material Coating | Powder Coating |
| RoHs Compliant Adaptor | Yes |
| Designed in accordance with | ISO/IEC 11801, IEC60304,IEC61754, TIA/EIA 568.D |

Included accessories


| Accessories | Quantity |
|---------------------------|----------|
| Cable Gland (PG 13.5) | 1 |
| Cable Gland(PG 19) | 1 |
| Nylon cable tie | 7 |
| Adjustable cable tie | 4 |
| 24 Position splice holder | 2 |
| Mounting twist tie | 4 |
| Cage nuts and screws | 1pk |



Product drawings

Page 3/5 This data sheet was generated at 7:43pm 7th June 2025 and is subject to change at any time.



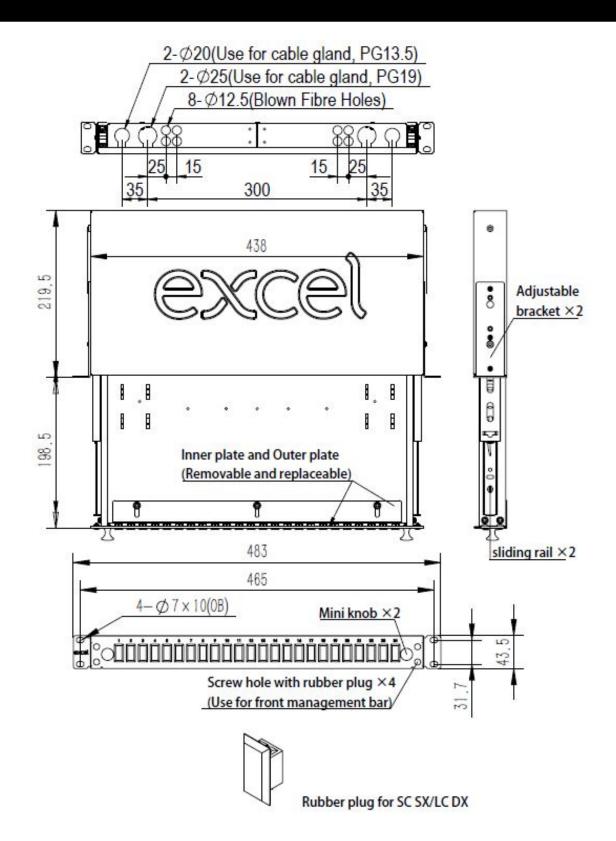

Item Code: 200-952



Standards

| Applicable standard | Detail |
|--|---|
| RoHS-II/-III (2011/65/EU & 2015/863): 2023 | Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III). |
| WFD: 2023 | Compliant to Waste Framework Directive |
| SCIP: 2023 | Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products) |
| POPs (EU) No 2019/1021 | EU Regulation for the restriction of Persistent Organic Pollutants. |

Part Number Table

| Part Number | Description |
|-------------|--|
| 200-952 | Excel Enbeam 24 Way SC Simplex/LC Duplex Fibre Optic Panel Empty |

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.



Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.