Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 SC-SC Singlemode 9/125 SX LS0H Blue 2 m

Part Code: 200-969

sales@excel-networking.com
excel-networking.com



Main Features

- Choice of lengths (1-10 metres)
- G.657.A2 Bend Insensitive Fibre
- Blue outer sheath
- Choice of connectors (SC, SC APC, LC)
- 2.0 mm cable
- 25 Year system warranty

Product Overview

The Enbeam range of patch cords are constructed from high quality connectors and G.657.A2 bend insensitive 9/125 µm OS2 grade cable. Each cable has a short strain relief boot and is supplied with a test report detailing insertion loss.

All of the patch cords come with a blue outer sheath and are individually packaged and labelled.

Product Specifications

This data sheet was generated at 10:33pm 21st November 2026 and is subject to change at any time.

Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 SC-SC Singlemode 9/125 SX LS0H Blue 2 m

Part Code: 200-969

sales@excel-networking.com
excel-networking.com

Feature	Values
Fibre type	**Single mode**
Category	**OS2**
Fibre standard according to ITU-T	**G.657.A2**
Number of Cores	**1**
Outer diameter sheath single fibre	**2 mm**
Cable type	**Simplex**
Length	**2 m**
Type of connector connection 1	**SC**
Type of connector connection 2	**SC**
Outer sheath colour	**Blue**
Strain relief boot	**Push-on**
Flame retardant according to IEC 60332-1-2	**yes**
Low smoke (acc. IEC 61034-2)	**yes**

This data sheet was generated at 10:33pm 21st November 2026 and is subject to change at any time.


Product schematics

This data sheet was generated at 10:33pm 21st November 2026 and is subject to change at any time.

Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 SC-SC Singlemode 9/125 SX LS0H Blue 2 m


Part Code: 200-969

sales@excel-networking.com
excel-networking.com

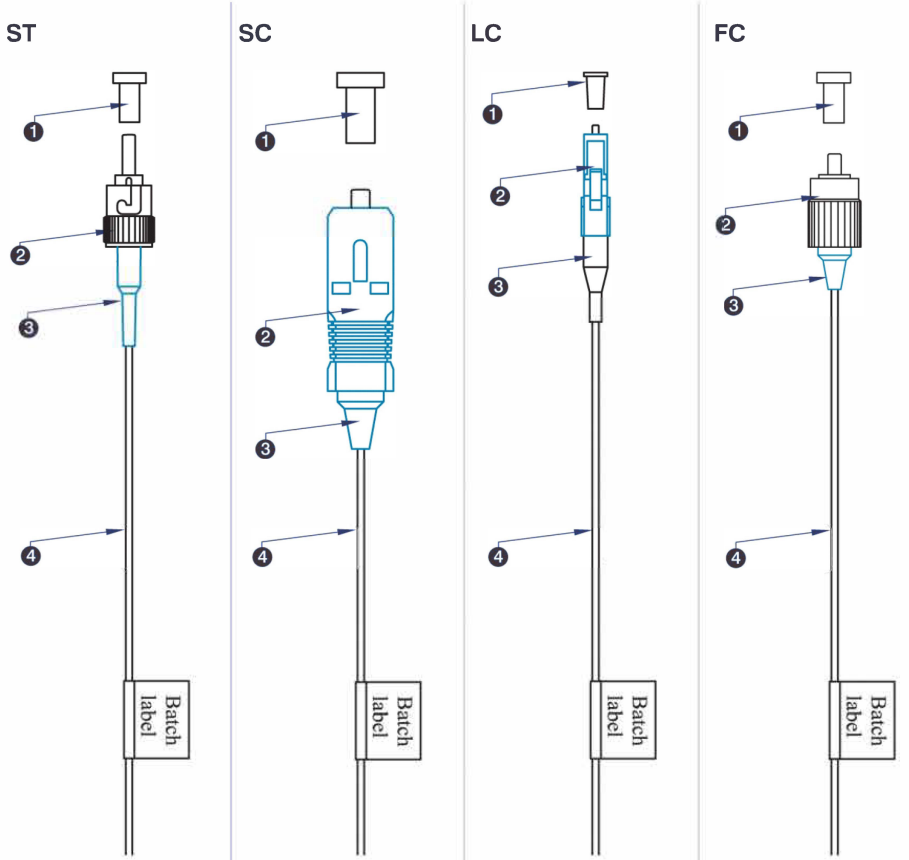


ST	SC	LC	FC
❶ ST Dust cover	❶ SC Dust cover	❶ LC Dust cover	❶ FC Dust cover
❷ ST connector	❷ SC connector	❷ LC connector	❷ FC connector
❸ ST Strain relief boot	❸ SC Strain relief boot	❸ LC Strain relief boot	❸ FC Strain relief boot
❹ Easy Strip LSOH cable	❹ Easy Strip LSOH cable	❹ Easy Strip LSOH cable	❹ Easy Strip LSOH cable

Cable Profile



Packaging

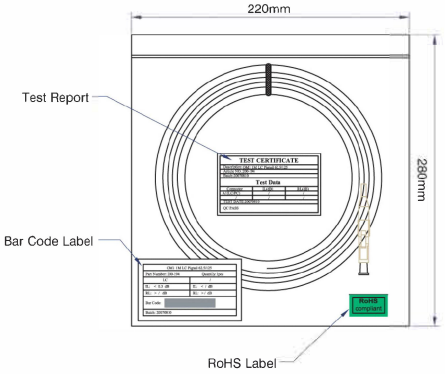

This data sheet was generated at 10:33pm 21st November 2026 and is subject to change at any time.

Cable specifications

Features	Values	ST Assemblies	SC Assemblies	LC Assemblies
Construction	**Semi-Tight Buffered**			
No. of Fibres	**1**			
Diameter	**900 micron**			
Temperature range	**-20C to +70C**			
Connector Material		**Nickel plated Brass**	**Composite**	**Composite**
Minimum bend radius	**10 x cable diameter**			
Connector Ferrule		**2.5 mm Zirconium ceramic**	**2.5 mm Zirconium ceramic**	**1.25 mm Zirconium ceramic**
Connector Insertion Loss	**Max. 0.3 dB**			
Connector Return Loss (Multimode)	**Max. -30 dB**			
Ferrule End Face (Singlemode UPC)	**Max. -50 dB**			
Ferrule End Face (Singlemode APC)	**Max. -60 dB**			

This data sheet was generated at 10:33pm 21st November 2026 and is subject to change at any time.

Standards

Applicable standard	Detail
BS EN 60332-1-2:2004+A11:2016	Tests on electric and optical fibre cables under fire conditions - Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 60793-1-1:2022	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-2:2015	Optical fibres - Part 2: Product specifications - General
IEC 60793-2-10:2017	Sectional specification for A1 multimode fibres
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
IEC 60793-1-31:2010	Optical fibres - Part 1-31: Measurement methods and test procedures - Tensile Strength
ITU-T G.652:2016	Characteristics of a single-mode optical fibre and cable
ITU-T G.657:2016	Characteristics of a bending-loss insensitive single-mode optical fibre and cable
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance

This data sheet was generated at 10:33pm 21st November 2026 and is subject to change at any time.

IEC 61754-2:1996	Fibre optic connector interfaces - Part 2: Type BFOC/2,5 connector family
IEC 61754-4:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4: Type SC connector family
IEC 61754-4-100:2015	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4-100: Type SC connector family - Simplified receptacle SC-PC connector interfaces
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
ANSI/TIA 568-3.D	Optical Fiber Cabling and Components Standard
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

This data sheet was generated at 10:33pm 21st November 2026 and is subject to change at any time.

Part Code Table

Part Code	Description
200-968	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 SC-SC Singlemode 9/125 SX LS0H Blue 1 m**
200-969	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 SC-SC Singlemode 9/125 SX LS0H Blue 2 m**
200-970	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 SC-SC Singlemode 9/125 SX LS0H Blue 3 m**
200-971	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 SC-SC Singlemode 9/125 SX LS0H Blue 5 m**
200-972	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 SC-SC Singlemode 9/125 SX LS0H Blue 10 m**
200-973	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 LC-SC Singlemode 9/125 SX LS0H Blue 1 m**
200-974	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 LC-SC Singlemode 9/125 SX LS0H Blue 2 m**
200-975	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 LC-SC Singlemode 9/125 SX LS0H Blue 3 m**
200-976	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 LC-SC Singlemode 9/125 SX LS0H Blue 5 m**
200-977	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 LC-SC Singlemode 9/125 SX LS0H Blue 10 m**
200-978	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 SC-SC/APC SM 9/125 SX LS0H Blue 1 m**
200-979	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 SC-SC/APC SM 9/125 SX LS0H Blue 2 m**
200-980	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 SC-SC/APC SM 9/125 SX LS0H Blue 3 m**
200-981	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 SC-SC/APC SM 9/125 SX LS0H Blue 5 m**

This data sheet was generated at 10:33pm 21st November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

200-982	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.A2 SC-SC/APC SM 9/125 SX LS0H Blue 10 m**

This data sheet was generated at 10:33pm 21st November 2026 and is subject to change at any time.