
Excel Enbeam OS2 Fibre Optic Patch Lead G.657.B3 SC/APC-SC/APC SM 9/125 SX LS0H White 1 m

Part Code: 201-220

sales@excel-networking.com
excel-networking.com

CIBSE TM65 Embodied Carbon: 0.097 kg CO2e

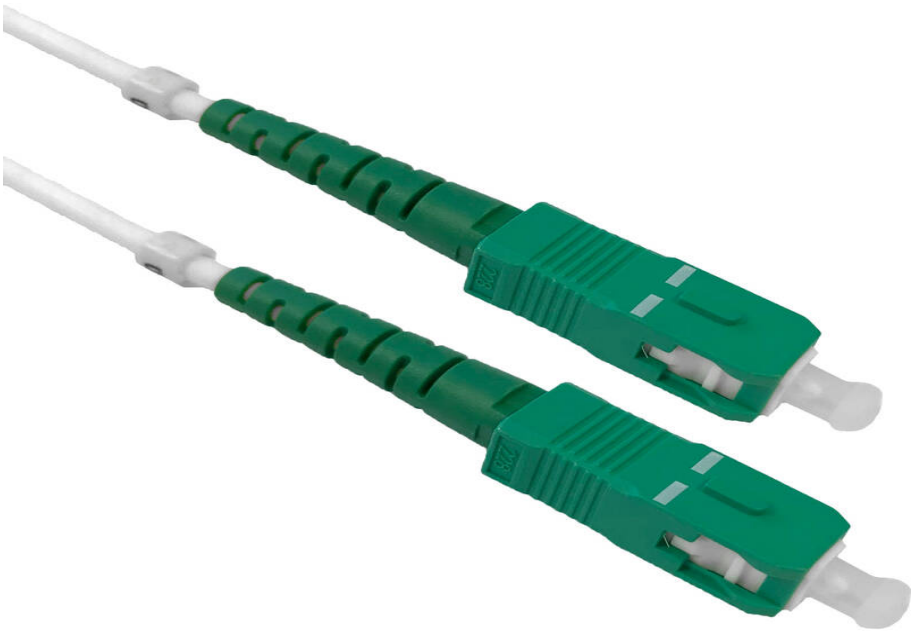

Main Features

- / Internal application
- / Multiple sizes available
- / G657.B3 Bend insensitive
- / LS0H sheath
- / Crush and Impact resistant
- / RoHS compliant

Product Overview

Enbeam white SC/APC patch leads have been designed for us in the FTTH market as a subscriber connection. The 2.8 mm lead offers a high bend radius and high crush resistance to withstand the home environment whilst offering a neutral colour within the premises.

Product Specifications

Feature	Values

This data sheet was generated at 7:01am 21st November 2026 and is subject to change at any time.


Excel Enbeam OS2 Fibre Optic Patch Lead G.657.B3 SC/APC-SC/APC SM 9/125 SX LS0H White 1 m


Part Code: 201-220


sales@excel-networking.com
excel-networking.com

Fibre type	**Single mode**
Category	**OS2**
Number of Cores	**1**
Cable type	**Simplex**
Length	**1 m**
Type of connector connection 1	**SC**
Type of connector connection 2	**SC**
Outer sheath colour	**White**

Product drawing

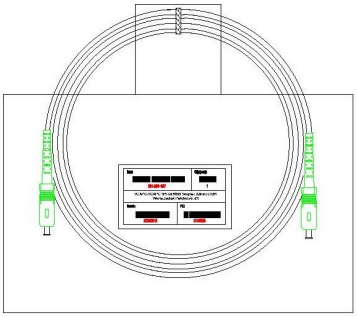

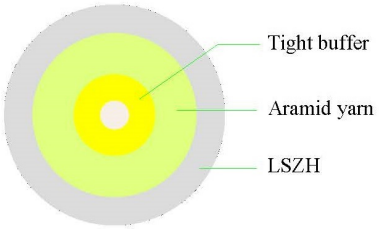

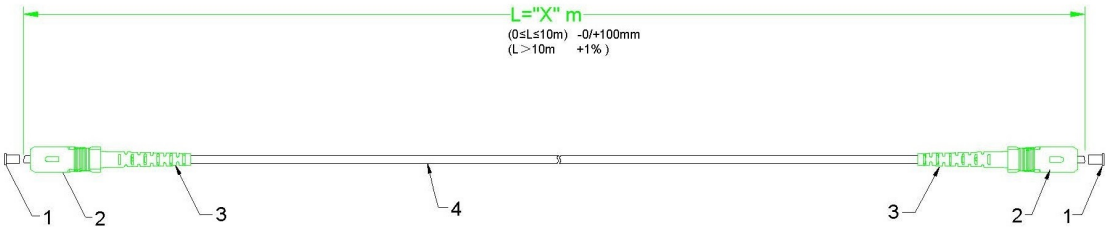

This data sheet was generated at 7:01am 21st November 2026 and is subject to change at any time.

Additional specifications

Features		Values
Insertion loss	**@1310nm/1550nm**	**≤ 0.2dB**
Attenuation	**@full spectrum**	**≤ 0.4dB**
Dispersion coefficient	**@1310nm**	**≤ 3.0ps (nm.km)**
	@1550nm	**≤ 18ps (nm.km)**
Strength member		**Aramid yarn**
Max tension	**short term**	**150 N**
	long term	**80 N**
Max bend radius	**short term**	**10 mm**
	long term	**5 mm**
Crush resistance		**500 N/100 mm^2**
Temperatures	**operating**	**-20°C to 70°C**

Standards

Applicable standard	Detail
BS EN 60332-1-2:2004+A11:2016	Tests on electric and optical fibre cables under fire conditions - Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 60793-1-1:2022	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-2:2015	Optical fibres - Part 2: Product specifications - General
IEC 60793-2-10:2017	Sectional specification for A1 multimode fibres

This data sheet was generated at 7:01am 21st November 2026 and is subject to change at any time.

IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
IEC 60793-1-31:2010	Optical fibres - Part 1-31: Measurement methods and test procedures - Tensile Strength
ITU-T G.652:2016	Characteristics of a single-mode optical fibre and cable
ITU-T G.657:2016	Characteristics of a bending-loss insensitive single-mode optical fibre and cable
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance
IEC 61754-2:1996	Fibre optic connector interfaces - Part 2: Type BFOC/2,5 connector family
IEC 61754-4:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4: Type SC connector family
IEC 61754-4-100:2015	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4-100: Type SC connector family - Simplified receptacle SC-PC connector interfaces
IEC 61754-20:2012	Fibre optic connector interfaces - Part 20: Type LC connector family
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements

This data sheet was generated at 7:01am 21st November 2026 and is subject to change at any time.

Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Part Code Table

Part Code	Description
201-219	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.B3 SC/APC-SC/APC SM 9/125 SX LS0H White 0.5 m**
201-220	**Excel Enbeam OS2 Fibre Optic Patch Lead G.657.B3 SC/APC-SC/APC SM 9/125 SX LS0H White 1 m**

This data sheet was generated at 7:01am 21st November 2026 and is subject to change at any time.