

Excel Enbeam 24 Way Multimode Fibre Optic Panel 24 LC Duplex 48F + Cassette Aqua

Item Code: 201-626



Multimode/singlemode options available

Choice of port density

Management and fixing kit included

Adjustable fixing arms included

Multiple cable entry to rear

Sliding drawer on ball bearing runners

Up to 48 fibres

Product Overview

The Excel range of LC patch panels are sliding drawer "tray style" housings suitable for either direct termination or splicing of up to 48 fibres in 1U of rack space. Each panel is manufactured from high quality 2 mm thick steel and finished in Black powder coat to provide a strong and durable unit.

To the front of the patch panel the specified number of adaptors are loaded from left to right. Each panel utilises colour coded adaptors, beige, aqua and violet for multimode, blue for singlemode, and green for SM APC. Each duplex (or quad) adaptor accommodates two (four) terminated fibres.

Each panel has included within it a set of fixing brackets, and a cable management pack which includes cable entry glands, cable ties, splice holders, cage nuts and screws are also provided.

Note that LC panels can be assembled to order using a combination of adaptors, pigtails and splice cassettes.

Product Specifications

| Feature | Values |
|--|--------|
| Suitable for number of fibre cores | 48 |
| Suitable for number of module inserts | 24 |
| Loaded with number of couplings/adapters | 24 |
| With pigtails | no |

Excel Enbeam 24 Way Multimode Fibre Optic Panel 24 LC Duplex 48F + Cassette Aqua

Item Code: 201-626



| | |
|----------------------------|-----------------------------|
| Fibre type | Multi mode 50/125 |
| Fibre class | OM3/OM2 |
| APC-type | no |
| Type of connector external | LC-Duplex |
| Type of connector interior | LC-Duplex |
| Colour | Black |
| RAL-number | 9005 |
| Mounting method | 482.6 mm (19 inch) mounting |
| Number of rack units (RU) | 1 |
| Height | 43.5 mm |
| Width | 483 mm |
| Depth | 219.5 mm |

Additional specifications

| Feature | Value |
|-----------------------------|--|
| Operating Temperature | -40 to +80 °C |
| IP Rating | IP20 |
| Cable Entry 20mm | 2 |
| Cable Entry 25mm | 2 |
| Material | Cold rolled steel |
| Material Thickness | 2mm |
| Material Coating | Powder Coating |
| RoHs Compliant Adaptor | Yes |
| Designed in accordance with | ISO/IEC 11801, IEC60304, IEC61754, TIA/EIA 568.D |

Included accessories

| Accessories | Quantity |
|-----------------------|----------|
| Cable Gland (PG 13.5) | 1 |
| Cable Gland(PG 19) | 1 |
| Nylon cable tie | 7 |
| Adjustable cable tie | 4 |

Excel Enbeam 24 Way Multimode Fibre Optic Panel
24 LC Duplex 48F + Cassette Aqua

Item Code: 201-626



| | |
|------------------------------|-----|
| 24 Position splice Cassette | 2 |
| Label holder (210 x 9.2 mm) | 2 |
| Mounting twist tie | 4 |
| Cage nuts and screws | 1pk |

Excel Enbeam 24 Way Multimode Fibre Optic Panel
24 LC Duplex 48F + Cassette Aqua


Item Code: 201-626



Product drawing

Excel Enbeam 24 Way Multimode Fibre Optic Panel
24 LC Duplex 48F + Cassette Aqua

Item Code: 201-626

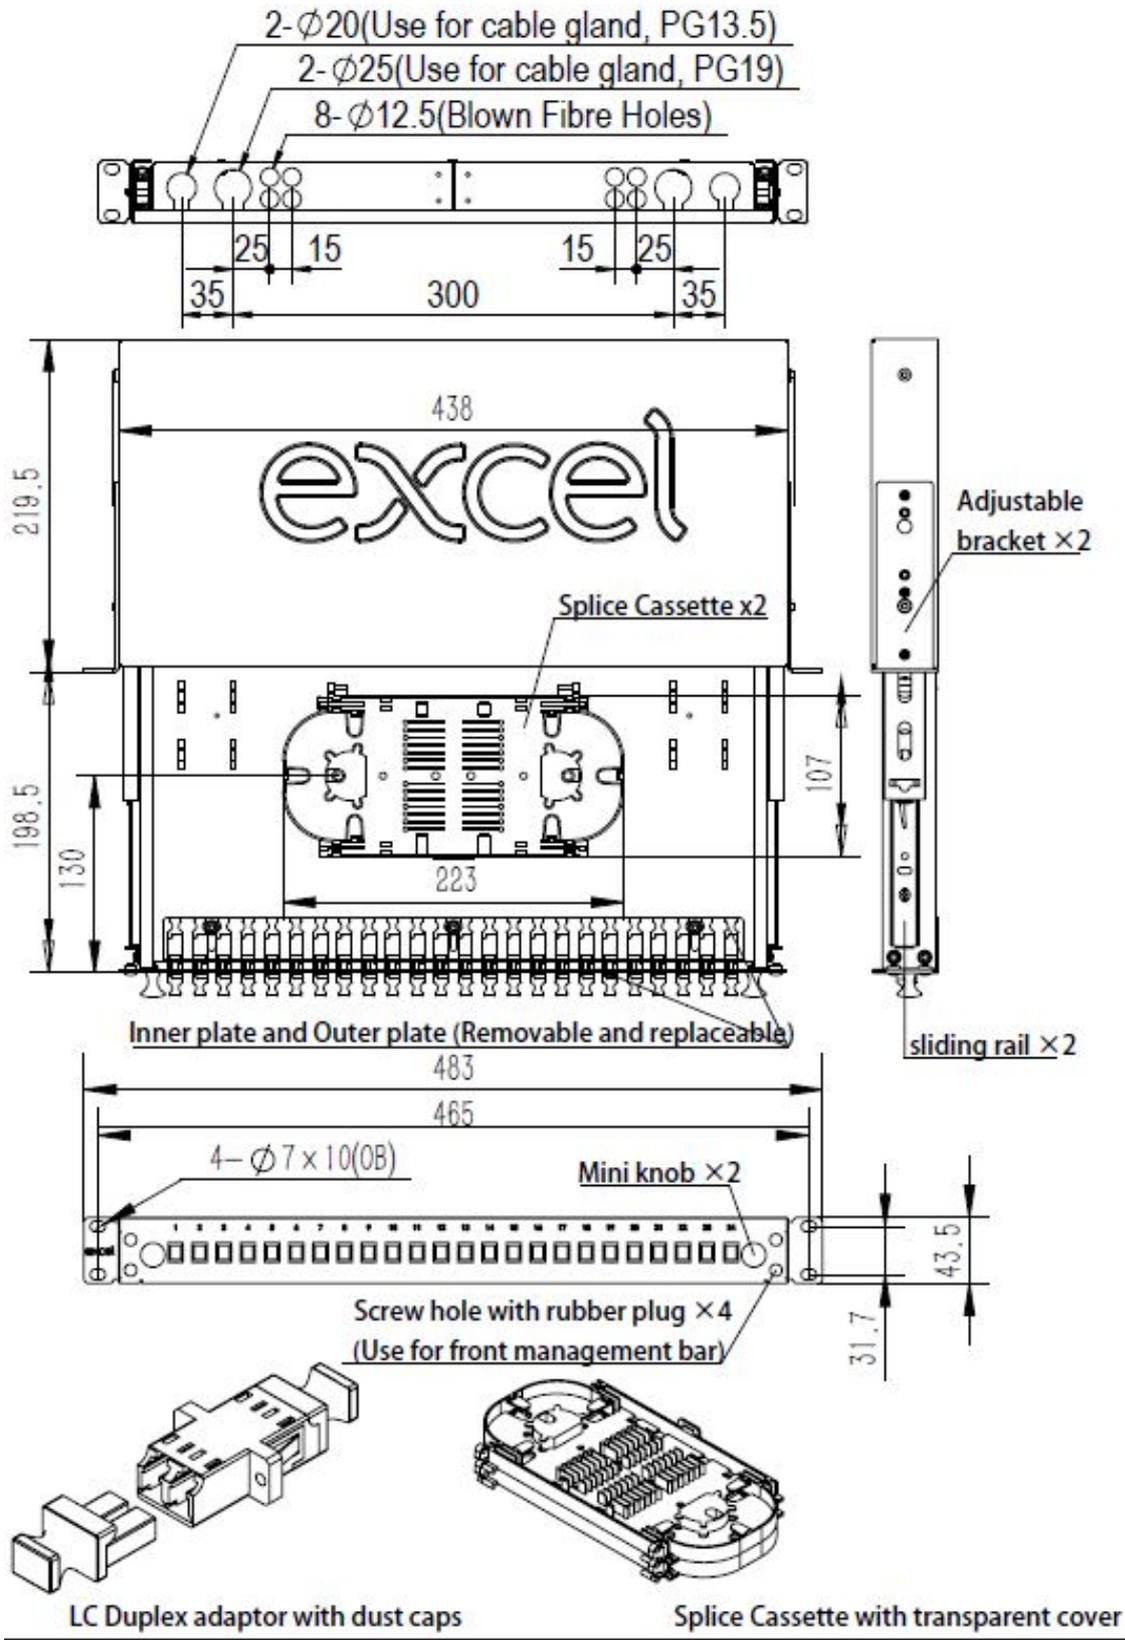

Excel Enbeam 24 Way Multimode Fibre Optic Panel 24 LC Duplex 48F + Cassette Aqua

Item Code: 201-626



Standards

| Applicable standard | Detail |
|------------------------------------|--|
| Directive 2011/65/EU (RoHS II) | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states). |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant. |
| Directive 2008/98/EC (WFD) | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988). |
| ECHA SCIP Database | Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH. |
| Regulation (EU) 2019/1021 (POPs) | EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355). |
| UK SI 2012 No. 3032 | The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019. |

Part Number Table

| Part Number | Description |
|-------------|--|
| 201-620 | Excel Enbeam 24 Way Singlemode Fibre Optic Panel 24 LC Duplex 48F + Pigtail & Cassette Blue |
| 201-621 | Excel Enbeam 24 Way Singlemode Fibre Optic Panel 24 LC/APC Duplex 48F + Pigtail & Cassette Green |
| 201-622 | Excel Enbeam 24 Way Multimode Fibre Optic Panel 24 LC Duplex 48F + Pigtail & Cassette Aqua |
| 201-623 | Excel Enbeam 24 Way Multimode Fibre Optic Panel 24 LC Duplex 48F + Pigtail & Cassette Violet |
| 201-624 | Excel Enbeam 24 Way Singlemode Fibre Optic Panel 24 LC Duplex 48F + Cassette Blue |
| 201-625 | Excel Enbeam 24 Way Singlemode Fibre Optic Panel 24 LC/APC Duplex 48F + Cassette Green |
| 201-626 | Excel Enbeam 24 Way Multimode Fibre Optic Panel 24 LC Duplex 48F + Cassette Aqua |

Excel Enbeam 24 Way Multimode Fibre Optic Panel
24 LC Duplex 48F + Cassette Aqua

Item Code: 201-626



201-627

Excel Enbeam 24 Way Multimode Fibre Optic Panel 24 LC Duplex 48F +
Cassette Violet

Excel is a world class premium performing end to end infrastructure solution designed,
Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.