

Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/UPC-LC/APC SM 9/125 SX LS0H Yellow 1 m

Part Code: 202-341

sales@excel-networking.com
excel-networking.com

CIBSE TM65 Embodied Carbon: 0.048 kg CO2e



Main Features

- / 100% optically tested
- / Low loss connectors
- / Bend insensitive construction
- / Test certificate included
- / Zirconia ceramic ferrules
- / CIBSE TM65 Embodied Carbon: 0.048 kg CO2e

Product Overview

Excel OS2 9/125 µm simplex patch leads are manufactured from the highest quality 900 µm G.657.A2 buffer/jacket optical fibre, terminated with ceramic ferrule connectors. Each cable has strain relief boots to prolong and maintain performance levels of the assembly. A label containing a unique batch number is fixed to the centre of cable for quality and traceability purposes.

Product Specifications

Feature	Values
---------	--------

Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/UPC-LC/APC SM 9/125 SX LS0H Yellow 1 m

Part Code: 202-341

sales@excel-networking.com
excel-networking.com

Fibre type	Single mode
Category	OS2
Number of Cores	1
Outer diameter sheath single fibre	2 mm
Cable type	Simplex
Length	1 m
Type of connector connection 1	LC
Type of connector connection 2	LCA
Outer sheath colour	Yellow
Strain relief boot	Push-on
Flame retardant according to IEC 60332-1-2	yes
Low smoke (acc. IEC 61034-2)	yes

Additional specifications

Feature	Value
Cable Construction	Simplex
No of fibres	1
Cable Diameter	2 mm
Insertion Grade	B
Insertion Loss MAX	0.15 dB
Return Loss APC	>65 dB
Return loss UPC	>50 dB
Tensile SC	100 N
Tensile LC	80 N


Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/UPC-LC/APC SM 9/125 SX LS0H Yellow 1 m

Part Code: 202-341

sales@excel-networking.com
excel-networking.com

Durability	500 matings
Operating Temperature	-20°C - 70°C
Storage Temperature	-40°C - 85°C

Cross-section diagram

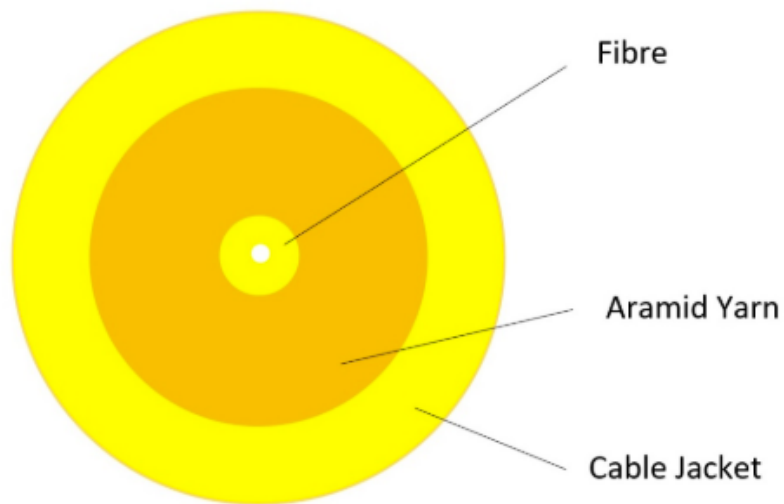

Standards

Applicable standard	Detail
BSEN 60332-1-2:2004+A11:2016	Tests on electric and optical fibre cables under fire conditions - Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame

Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/UPC- LC/APC SM 9/125 SX LS0H Yellow 1 m

Part Code: 202-341

sales@excel-networking.com
excel-networking.com

IEC 60793-1-1:2022	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-2:2015	Optical fibres - Part 2: Product specifications - General
IEC 60793-2-10:2017	Sectional specification for A1 multimode fibres
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
IEC 60793-1-31:2010	Optical fibres - Part 1-31: Measurement methods and test procedures - Tensile Strength
ITU-T G.652:2016	Characteristics of a single-mode optical fibre and cable
ITU-T G.657:2016	Characteristics of a bending-loss insensitive single-mode optical fibre and cable
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance
IEC 61754-2:1996	Fibre optic connector interfaces - Part 2: Type BFOC/2,5 connector family
IEC 61754-4:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4: Type SC connector family
IEC 61754-4-100:2015	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4-100: Type SC connector family - Simplified receptacle SC-PC connector interfaces

Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/UPC-LC/APC SM 9/125 SX LS0H Yellow 1 m

Part Code: 202-341

sales@excel-networking.com
excel-networking.com

IEC 61754-4-100:2015	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4-100: Type SC connector family - Simplified receptacle SC-PC connector interfaces
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Part Code Table

Part Code	Description
202-300	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/APC-LC/APC SM 9/125 SX LS0H Yellow 0.5 m
202-301	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/APC-LC/APC SM 9/125 SX

Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/UPC-LC/APC SM 9/125 SX LS0H Yellow 1 m

Part Code: 202-341

sales@excel-networking.com
excel-networking.com

LS0H Yellow 1 m

202-302	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/APC-LC/APC SM 9/125 SX LS0H Yellow 2 m
202-303	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/APC-LC/APC SM 9/125 SX LS0H Yellow 3 m
202-320	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-SC/APC SM 9/125 SX LS0H Yellow 0.5 m
202-321	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-SC/APC SM 9/125 SX LS0H Yellow 1 m
202-322	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-SC/APC SM 9/125 SX LS0H Yellow 2 m
202-323	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-SC/APC SM 9/125 SX LS0H White 2 m
202-324	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-SC/APC SM 9/125 SX LS0H Yellow 3 m
202-325	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-SC/APC SM 9/125 SX LS0H White 3 m
202-326	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-SC/APC SM 9/125 SX LS0H Yellow 20 m
202-327	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-SC/APC SM 9/125 SX LS0H White 20 m
202-330	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/UPC-LC/APC SM 9/125 SX LS0H Yellow 0.5 m
202-331	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/UPC-LC/APC SM 9/125 SX LS0H Yellow 1 m
202-332	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/UPC-LC/APC SM 9/125 SX LS0H Yellow 2 m
202-333	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/UPC-LC/APC SM 9/125 SX LS0H Yellow 3 m
202-335	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/UPC-LC/APC SM 9/125 SX LS0H Yellow 5 m
202-340	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/UPC-LC/APC SM 9/125 SX LS0H Yellow 0.5 m

Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/UPC-LC/APC SM 9/125 SX LS0H Yellow 1 m

Part Code: 202-341

sales@excel-networking.com
excel-networking.com

202-341	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/UPC-LC/APC SM 9/125 SX LS0H Yellow 1 m
202-342	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/UPC-LC/APC SM 9/125 SX LS0H Yellow 2 m
202-350	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/UPC-LC/UPC SM 9/125 SX LS0H Yellow 0.5 m
202-351	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/UPC-LC/UPC SM 9/125 SX LS0H Yellow 1 m
202-352	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm LC/UPC-LC/UPC SM 9/125 SX LS0H Yellow 2 m
202-353	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-SC/APC SM 9/125 SX LS0H White 0.5 m
202-354	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-SC/APC SM 9/125 SX LS0H White 1 m
202-356	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-SC/UPC SM 9/125 SX LS0H Yellow 0.5 m
202-357	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-SC/UPC SM 9/125 SX LS0H White 0.5 m
202-358	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-LC/APC SM 9/125 SX LS0H Yellow 20 m
202-359	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-LC/APC SM 9/125 SX LS0H White 20 m
202-361	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-LC/APC SM 9/125 SX LS0H Yellow 1 m
202-362	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-LC/APC SM 9/125 SX LS0H Yellow 2 m
202-363	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-LC/APC SM 9/125 SX LS0H Yellow 3 m
202-364	Excel Enbeam OS2 Fibre Optic Patch Lead 2 mm SC/APC-LC/UPC SM 9/125 SX LS0H Yellow 2 m