Item Code: 202-402









- X Available in OM3/OM4/OS2
- X 100% optically tested
- X Low loss connectors
- X Very small 2 mm diameter cable
- X Easy polarity change
- 25 Year system warranty
- X CIBSE TM65 Embodied Carbon: 0.090 kg CO2e

#### **Product Overview**

Excel's range of LC Uniboot patch cords provide excellent performance in a compact design, using 2 mm round cable containing  $2 \times 600$  micron diameter fibres, which are ideal in high density applications. They are available in a choice of OM3, OM4 or OS2 bendinsensitive fibre.

These patch cords are available in two versions - standard uniboot and pull-tab version. Both versions allow for easy polarity changing.

#### **Product Specifications**

Feature	Values
Fibre type	Single mode
Category	OS2
Number of Cores	2
Outer diameter sheath single fibre	2 mm
Cable type	Duplex
Length	2 m
Type of connector connection 1	LC (Uniboot)
Type of connector connection 2	LC (Uniboot)

Item Code: 202-402



Outer sheath colour	Yellow
Strain relief boot	Push-on
Flame retardant according to IEC 60332-1-2	yes
Low smoke (acc. IEC 61034-2)	yes

### **Cable specifications**

Features	Values
Cable Construction	Round Duplex
No. of Fibres	2
Cable Nominal Diamter	2.0 mm
Colour	Yellow
Strength members	Aramid Yarn
Temperature range	-20 °C to +70 °C
Connector Material	Composite
Minimum bend radius (loaded)	10 x cable diameter
Connector Ferrule	1.25 mm Ceramic
Ferrule End Face	UPC Polish
Connector Insertion Loss	Max. 0.3 dB


### **Fibre specifications**

Features	OS2
Fibre Attenuation @ 1310nm	Less than 0.35 dB/km
Fibre Attenuation @ 1550nm	Less than 0.20 dB/km
Connector IL - Typical	0.15 dB
Connector IL - Max	0.3 dB
Connector Return Loss	Less than -50 dB


Item Code: 202-402



#### **Cross-section diagram**

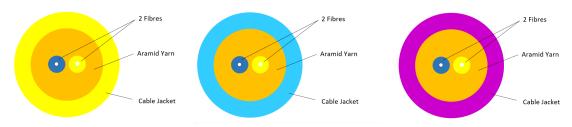

#### **Product drawing**

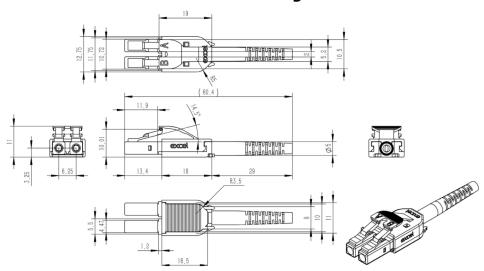

#### **Standards**

Applicable standard	Detail
BS EN 60332-1-2:2004+A11:2016	Tests on electric and optical fibre cables under fire conditions - Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 60793-1-1:2022	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-2:2015	Optical fibres - Part 2: Product specifications - General
IEC 60793-2-10:2017	Sectional specification for A1 multimode fibres
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry

Item Code: 202-402



IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
IEC 60793-1-31:2010	Optical fibres - Part 1-31: Measurement methods and test procedures - Tensile Strength
ITU-T G.652:2016	Characteristics of a single-mode optical fibre and cable
ITU-T G.657:2016	Characteristics of a bending-loss insensitive single-mode optical fibre and cable
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance
IEC 61754-2:1996	Fibre optic connector interfaces - Part 2: Type BFOC/2,5 connector family
IEC 61754-4:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4: Type SC connector family
IEC 61754-4-100:2015	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4-100: Type SC connector family - Simplified receptacle SC-PC connector interfaces
IEC 61754-4-100:2015	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 4-100: Type SC connector family - Simplified receptacle SC-PC connector interfaces
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

Item Code: 202-402



#### **Part Number Table**

202-400 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 0.5 m  202-401 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 1 m  202-402 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 2 m  202-403 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 3 m  202-405 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 5 m  202-410 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 10 m  202-415 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 15 m  202-420 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 15 m	Part Number	Description
LS0H Yellow 1 m  202-402 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 2 m  202-403 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 3 m  202-405 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 5 m  202-410 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 10 m  202-415 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 15 m  202-420 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX	202-400	
LSOH Yellow 2 m  202-403  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LSOH Yellow 3 m  202-405  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LSOH Yellow 5 m  202-410  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LSOH Yellow 10 m  202-415  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LSOH Yellow 15 m  202-420  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX	202-401	·
LSOH Yellow 3 m  202-405  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LSOH Yellow 5 m  202-410  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LSOH Yellow 10 m  202-415  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LSOH Yellow 15 m  202-420  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX	202-402	•
LSOH Yellow 5 m  202-410  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LSOH Yellow 10 m  202-415  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LSOH Yellow 15 m  202-420  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX	202-403	·
LS0H Yellow 10 m  202-415  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX LS0H Yellow 15 m  202-420  Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX	202-405	·
LS0H Yellow 15 m  202-420 Excel Enbeam OS2 Fibre Optic Patch Lead Uniboot LC-LC Singlemode 9/125 DX	202-410	·
	202-415	·
	202-420	·

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.



Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.