

Excel Enbeam OS2 FTTx Drop Cable 250 µm 4 Core Cca White

Item Code: 205-331



✕ G.657.A2 Bend Insensitive

✕ Small Diameter Pre-terminated options

✕ Ideal for FTTx/PON Applications

✕ 250 micron fibre

✕ Euroclass Cca-s1b-d0-a1

✕ 25 Year system warranty

✕ CIBSE TM65 Embodied Carbon: 0.049 kg CO2e

Product Overview

Enbeam OS2 Singlemode FTTx Drop Cable 250 µm 4 Core 9/125 Cca White, part of a huge range of OS2 fibre optic cables fully stocked at Mayflex.

The Enbeam from 2 to 4-core mini breakout/drop cable is designed for indoor FTTx applications.

The very small diameter, high strength and CPR compliance to Cca, coupled with bend-insensitive fibres makes this cable ideal for behind-the-wall installations in any FTTx or PON network, especially where space is tight.


The cable can be supplied on reels or pre-cut lengths as well as pre-terminated on one end into an outlet box.

Product Specifications

Feature	Values
Number of Cores	4
Number of fibres per tube	4
Fibre type	Single mode 9/125
Category	OS2
Rodent resistant	yes
Outer sheath colour	White
Longitudinal water blocking cable	no

Flame retardant according to IEC 60332-1-2	yes
Low smoke (acc. IEC 61034-2)	yes
Reaction-to-fire class according to EN 13501-6	Cca
Smoke development class according to EN 13501-6	s1b
Euro class flaming droplets/particles according to EN 13501-6	d0
Euro class acidity according to EN 13501-6	a1
Outer diameter approx.	3 mm
RAL-number	9010

Cross-section diagram

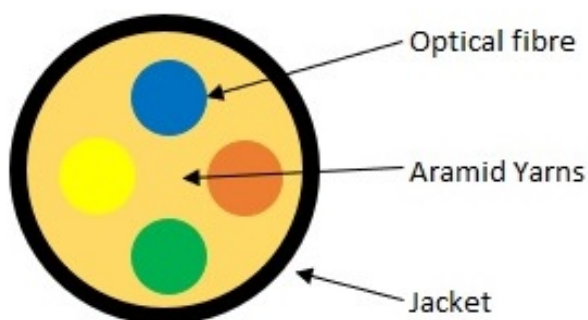

Fibre specifications

Features	Values
Attenuation @1310 nm (dB/km)	≤ 0.35
@1383 nm (dB/km)	≤ 0.35
@1490 nm (dB/km)	≤ 0.24
@1550 nm (dB/km)	≤ 0.20
@1625 nm (dB/km)	≤ 0.23
Fibre Core (μm)	8.2
Core Non-Circularity	$\leq 0.7\%$
Core-Clad Concentricity (μm)	≤ 0.5
Cladding Diameter (μm)	125.0 ± 0.7
Cladding Non-Circularity	$\leq 1.0\%$

Coating Diameter (µm)	± 5
Coating-Clad Concentricity Error (µm)	≤ 12
Jacket Material : LSFRZH	LSFRZH
Strength member	Aramid yarn
1-4 Fibre Colour	Blue, Orange, Green, Brown
Numerical aperture	0.14

Standards

Applicable standard	Subject
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 60754-2:2014+A1:2020	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
IEC 60793-1-1:2022	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
ITU G.652.D	Characteristics of a single-mode optical fibre and cable
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50575: 2014 + A1: 2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus,

Excel Enbeam OS2 FTTx Drop Cable 250 µm 4 Core Cca White

Item Code: 205-331



	procedures, results
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
ANSI/TIA 568-3.D	Optical Fiber Cabling and Components Standard
ANSI/TIA/EIA 598-D	Optical Fibre Cable Colour Coding
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

Part Number Table

Part Number	Description
205-331	Excel Enbeam OS2 FTTx Drop Cable 250 µm 4 Core Cca White
205-332	Excel Enbeam OS2 FTTx Drop Cable 250 µm 2 Core Cca White

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.