

Excel Enbeam OS2 SWA Direct Burial Fibre Optic Cable Loose Tube 24 Core Eca Black

excel
without compromise.

Part Code: 205-362

sales@excel-networking.com
excel-networking.com



Main Features

- / Water Resistant & UV Resistant
- / Duct grade - Rodent resistant
- / Sequentially metre marked
- / Cut to length service
- / Euroclass Eca
- / 25 Year system warranty

Product Overview

Enbeam OS2 Singlemode SWA Direct Burial Fibre Optic Cable Loose Tube 24 Core 9/125 Eca Black, part of a huge range of OS2 fibre optic cables fully stocked at Mayflex.

Excel steel wire (SWA) OS2 9/125µm armoured loose tube optical fibre cables have been designed specifically for direct burial and the most demanding of installations.

These cables are constructed from standard single loose tube cables which are then packed into a flexible but strong fibreglass water blocking strength member. An internal sheath with a rip cord is inserted with lengths of steel wire armouring over the top and then an oversheath is added providing a strong but flexible cable assembly.


Part Code: 205-362

sales@excel-networking.com
excel-networking.com

Product Specifications

| Feature | Values |
|------------------------------------------------|---------------------------------|
| Number of Cores | 24 |
| Type of tube | Loose tube |
| Number of fibres per tube | 24 |
| Fibre type | Single mode 9/125 |
| Category | OS2 |
| Rodent resistant | yes |
| Outer sheath material | Copolymer, thermoplastic (LSOH) |
| Outer sheath colour | Black |
| Flame retardant according to IEC 60332-1-2 | yes |
| Reaction-to-fire class according to EN 13501-6 | Eca |
| Outer diameter approx. | 11 mm |

Cross-section diagram

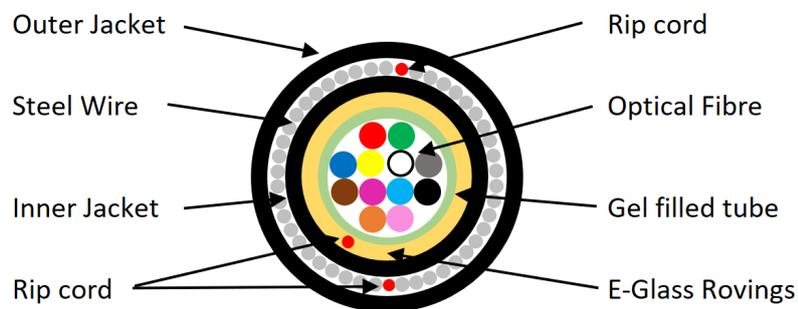

Excel Enbeam OS2 SWA Direct Burial Fibre Optic Cable Loose Tube 24 Core Eca Black

Part Code: 205-362

sales@excel-networking.com
excel-networking.com

Colour coding (as per TIA-598-C)



For fibre core counts above 12 the colour sequence is repeated with the addition of a mark every 70mm for cores 13-24 and two marks for 25-36 and so on.

Cable specifications

| Features | | Values |
|----------------------------|---------------------|------------------------------|
| Tensile Strength | | 3000 N |
| Crush Resistance | | 1500 N/m |
| Torsion | | ± 180° |
| Temperature performance | Installation | -30°C to +70°C |
| | Operation | -30°C to +70°C |
| | Storage | -30°C to +70°C |
| Loose tubes | Number | 1 |
| | Material | PBT |
| Loose Tube ID/OD | 4-16 Cores | 2.2/3.2 ± 0.1 mm |
| | 24 Cores | 2.6/3.5 ± 0.1 mm |
| Peripheral Strength Member | | Glass Yarn |
| Armoring | Thickness | 0.8 mm |
| | Material | Soft Zinc Coated Steel Wires |
| Outer Sheath | Thickness | 1.4 mm (Nominal) |

Excel Enbeam OS2 SWA Direct Burial Fibre Optic Cable Loose Tube 24 Core Eca Black

Part Code: 205-362

sales@excel-networking.com
excel-networking.com

| | Material | LSZH |
|------------------------|------------|----------------|
| Ripcord | Number | 3 |
| | Material | Polyester |
| Overall Cable Diameter | 4-16 Cores | 10.0 ± 0.5 mm |
| | 24 Cores | 10.5 ± 0.5 mm |
| Cable Weight | 4-16 Cores | 165 ± 15 kg/km |
| | 24 Cores | 180 ± 15 kg/km |
| Bending Radius | Short term | 20 x Diameter |
| | Long term | 10 x Diameter |

Fibre specifications

| Features | | OS2 |
|-----------------------------------|----------------|--------------------------------|
| Attenuation | @1310 nm | ≤ 0.36 dB/km |
| | @1550 nm | ≤ 0.23 dB/km |
| Chromatic Dispersion | 1285 - 1330 nm | ≤ 3.5 ps/nm.km |
| | 1550 nm | ≤ 18 ps/nm.km |
| Zero Dispersion Wavelength | | 1300 - 1324 nm |
| Zero Dispersion Slope | | ≤ 0.092 ps/nm ² .km |
| Polarisation Mode Dispersion | | ≤ 0.2 ps/√km |
| Cut-off Wavelength | | ≤ 1260 nm |
| Mode Field Diameter | @1310 nm | 9.2 ± 0.4 μm |
| Core Cladding Concentricity Error | | ≤ 0.8 μm |
| Cladding Diameter | | 125 ± 1 μm |

Excel Enbeam OS2 SWA Direct Burial Fibre Optic Cable Loose Tube 24 Core Eca Black

Part Code: 205-362

sales@excel-networking.com
excel-networking.com

Cladding Non-circularity $\leq 1\%$

Coating Diameter (Uncoloured) $245 \pm 10 \mu\text{m}$

Standards

| Applicable Standard | Subject |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IEC 60332-1-2:2004 | Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame |
| IEC 60754-2:2014+A1:2020 | Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity |
| IEC 61034-2:2005+A2:2020 | Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements |
| IEC 60793-1-1:2022 | Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance |
| IEC 60793-1-20:2014 | Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry |
| IEC 60793-1-21:2001 | Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry |
| IEC 60793-1-22:2001 | Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement |
| IEC 60793-1-30:2010 | Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test |
| ITU G.652.D | Characteristics of a single-mode optical fibre and cable |
| EN 50173-1:2018 | Information technology. Generic cabling systems - General requirements |
| EN 50575: 2014 + A1: 2016 | Power, control and communication cables — Cables for general applications in construction works subject to |

Excel Enbeam OS2 SWA Direct Burial Fibre Optic Cable Loose Tube 24 Core Eca Black

Part Code: 205-362

sales@excel-networking.com
excel-networking.com

| | |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | reaction to fire requirements |
| EN 50399:2011+A1:2016 | Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results |
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| ANSI/TIA 568-3.D | Optical Fiber Cabling and Components Standard |
| ANSI/TIA/EIA 598-D | Optical Fibre Cable Colour Coding |
| Directive 2011/65/EU (RoHS II) | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states). |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant. |
| Directive 2008/98/EC (WFD) | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988). |
| ECHA SCIP Database | Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH. |
| Regulation (EU) 2019/1021 (POPs) | EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355). |
| UK SI 2012 No. 3032 | The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019. |

Excel Enbeam OS2 SWA Direct Burial Fibre Optic Cable Loose Tube 24 Core Eca Black

Part Code: 205-362

sales@excel-networking.com
excel-networking.com

Part Code Table

| Part Code | Description |
|-----------|----------------------------------------------------------------------------------------|
| 205-356 | Excel Enbeam OS2 SWA Direct Burial Fibre Optic Cable Loose Tube 4 Core Eca Black |
| 205-360 | Excel Enbeam OS2 SWA Direct Burial Fibre Optic Cable Loose Tube 12 Core LSZH Eca Black |
| 205-362 | Excel Enbeam OS2 SWA Direct Burial Fibre Optic Cable Loose Tube 24 Core Eca Black |
| 205-368 | Excel Enbeam OS2 SWA Direct Burial Fibre Optic Cable Loose Tube 8 Core Eca Black |
| 205-370 | Excel Enbeam OS2 SWA Direct Burial Fibre Optic Cable Loose Tube 16 Core Eca Black |