Excel Encasa Customer Access Point With 30 m of G.657.B3 Fibre SCA (10-Pack)

Part Code: 207-001-10

sales@excel-networking.com
excel-networking.com



Main Features

- / Suitable for internal use only
- / Pre-terminated SCAPC
- / Factory assembled
- / 30 m of spooled fibre
- / No splicing required
- / G.657.B3 bend insensitive

Product Overview

The Excel Encasa discreet cabling solution has been designed for installation into any household or multi dwelling application. The outlets unique spooling mechanism houses 30 m of 900 µm micro-fibre, this fibre can be discreetly deployed around the interior of the property and retracted to remove any slack fibre.

With the use of the supplied adhesive the fibre is fixed to the wall above skirting or around the edge of the celling and once dry is almost invisible to the naked eye.

Each kit is supplied with, adhesive, wall fixings and cavity wall tool to assist in passing fibre through walls.

This data sheet was generated at 7:55am 17th November 2026 and is subject to change at any time.

Product Specifications


Feature	Values
Surface mounted	**yes**
Type of connector	**SC/APC simplex**
With couplers	**yes**
Suitable for number of couplers	**1**
Suitable for type of fibre	**Single mode**
Colour coding	**yes**

Additional specifications

Features	Values
Fibers color	**White**
Tight buffer material	**LSZH**
Cable diameter	**900 um**
Bend insensitive	**G.657.B3**
Operating temperature	**-25 to +70 °C**

This data sheet was generated at 7:55am 17th November 2026 and is subject to change at any time.

Product drawings

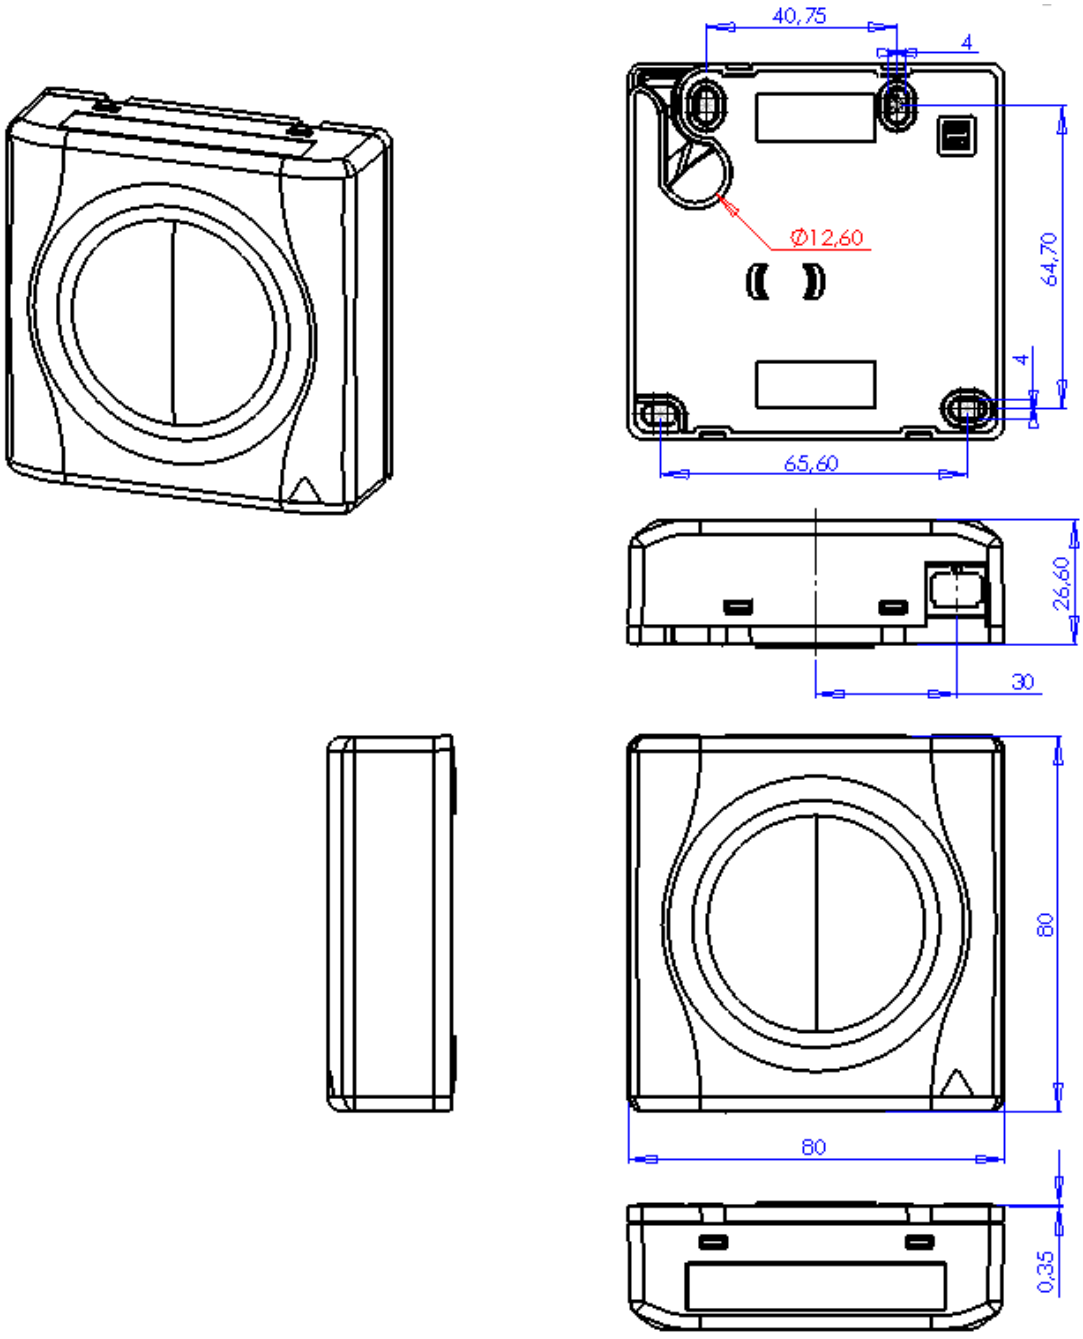

This data sheet was generated at 7:55am 17th November 2026 and is subject to change at any time.

Standards

Applicable standard	Detail
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
EN 50173-1:2018	Information technology - Generic cabling systems - General requirements
UL-94-V-0	Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. NO flaming drips are allowed.
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

This data sheet was generated at 7:55am 17th November 2026 and is subject to change at any time.

Included accessories

Accessories	Quantity
Tubes of adhisive	**10x35 ml**
Cavity wall tool	**1**
Screws and rawl plugs	**10 kits**
Internal bend protector	**30**
External bend protector	**30**
Cable entry wall plugs	**10**

Part Code Table

Part Code	Description
207-001-10	**Excel Encasa Customer Access Point With 30 m of G.657.B3 Fibre SCA (10-Pack)**

This data sheet was generated at 7:55am 17th November 2026 and is subject to change at any time.