



✗ Suitable for internal use only

✗ 30 m of spooled fibre

✗ Pre-terminated SCAPC

✗ No splicing required

✗ Factory assembled

✗ G.657 B3 bend insensitive

Product Overview

The Excel Encasa discreet cabling solution has been designed for installation into any household or multi dwelling application. The outlets unique spooling mechanism houses 30 m of 900 µm micro-fibre, this fibre can be discreetly deployed around the interior of the property and retracted to remove any slack fibre.

With the use of the supplied adhesive the fibre is fixed to the wall above skirting or around the edge of the ceiling and once dry is almost invisible to the naked eye.

Each kit is supplied with, adhesive, wall fixings and cavity wall tool to assist in passing fibre through walls.

Product Specifications

| Feature | Values |
|---------------------------------|----------------|
| Surface mounted | yes |
| Type of connector | SC/APC simplex |
| With couplers | yes |
| Suitable for number of couplers | 1 |
| Suitable for type of fibre | Single mode |
| Colour coding | yes |

Additional specifications







| Features | Values |
|-----------------------|---------------|
| Fibers color | White |
| Tight buffer material | LSZH |
| Cable diameter | 900 um |
| Bend insensitive | G.657.B3 |
| Operating temperature | -25 to +70 °C |

Excel Encasa Customer Access Point With 30 m of
G.657.B3 Fibre SCA (10-Pack)

Item Code: 207-001-10

excel
without compromise.

Product drawings

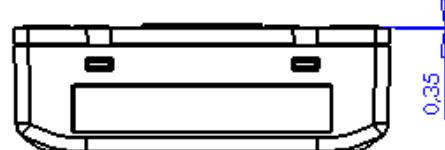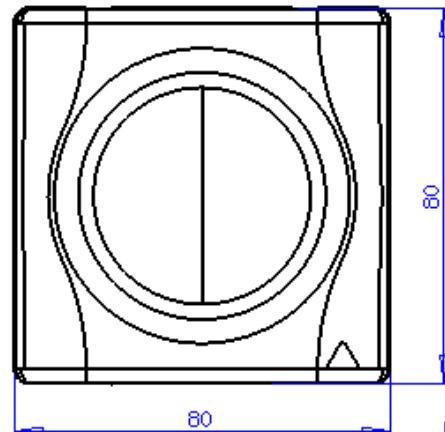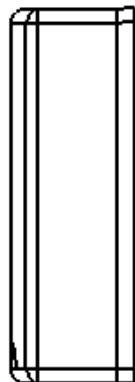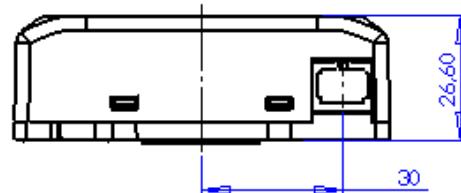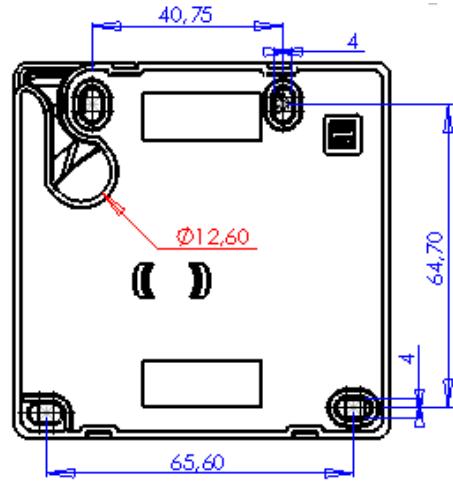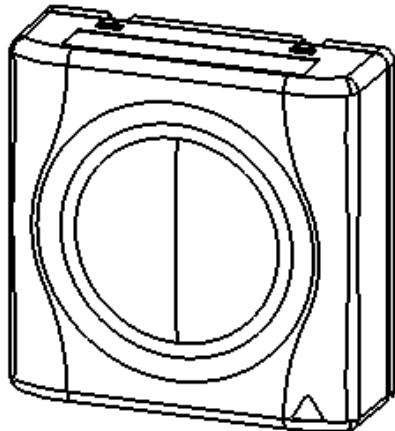

Standards

| Applicable standard | Detail |
|--|---|
| IEC 61754-1:2013 | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance |
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| EN 50173-1:2018 | Information technology - Generic cabling systems - General requirements |
| UL-94-V-0 | Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. NO flaming drips are allowed. |
| RoHS-II/-III (2011/65/EU & 2015/863): 2023 | Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III). |
| WFD: 2023 | Compliant to Waste Framework Directive |
| SCIP: 2023 | Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products) |
| POPs (EU) No 2019/1021 | EU Regulation for the restriction of Persistent Organic Pollutants. |

Included accessories

| Accessories | Quantity |
|-------------------------|----------|
| Tubes of adhesive | 10x35 ml |
| Cavity wall tool | 1 |
| Screws and rawl plugs | 10 kits |
| Internal bend protector | 30 |
| External bend protector | 30 |
| Cable entry wall plugs | 10 |

Excel Encasa Customer Access Point With 30 m of G.657.B3 Fibre SCA (10-Pack)

Item Code: 207-001-10



Part Number Table

| Part Number | Description |
|-------------|--|
| 207-001-10 | Excel Encasa Customer Access Point With 30 m of G.657.B3 Fibre SCA (10-Pack) |

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.

