

Excel Encasa Internal Point of Entry Box Loaded 1x SC/APC SX Adaptor SC/APC SM Pigtail 1 m

Item Code: 207-201



✕ Multiple cable entry

✕ Slack cable storage

✕ Integrated cable management

✕ Splice holder

✕ 1 adaptor position

✕ CIBSE TM65 Embodied Carbon: 0.539 kg CO2e

Product Overview

The Excel Encasa point of entry box has been designed to allow fibre to be passed through the enclosure allowing fibre to be distributed to apartments in multi dwelling applications.

The enclosure has multiple cable entry points, cable storage area, holds up to 2 splice protectors.

The enclosure comed loaded with 1 x SC/APC singlemode adaptor and a SC/APC 1 m pigtail.

Product Specifications

| Feature | Values |
|---------------------------------|----------------|
| Surface mounted | yes |
| Type of connector | SC/APC simplex |
| With couplers | yes |
| Suitable for number of couplers | 1 |
| Suitable for type of fibre | Single mode |
| Width | 148 mm |
| Height | 89 mm |
| Depth | 16 mm |

Excel Encasa Internal Point of Entry Box Loaded 1x SC/APC SX Adaptor SC/APC SM Pigtail 1 m


Item Code: 207-201



Additional specifications

| Features | Values |
|-----------------------|---------------|
| Splicing capacity | 2 |
| Material | ABS |
| Colour | White |
| Operation temperature | -20 to +85 °C |

Product drawings

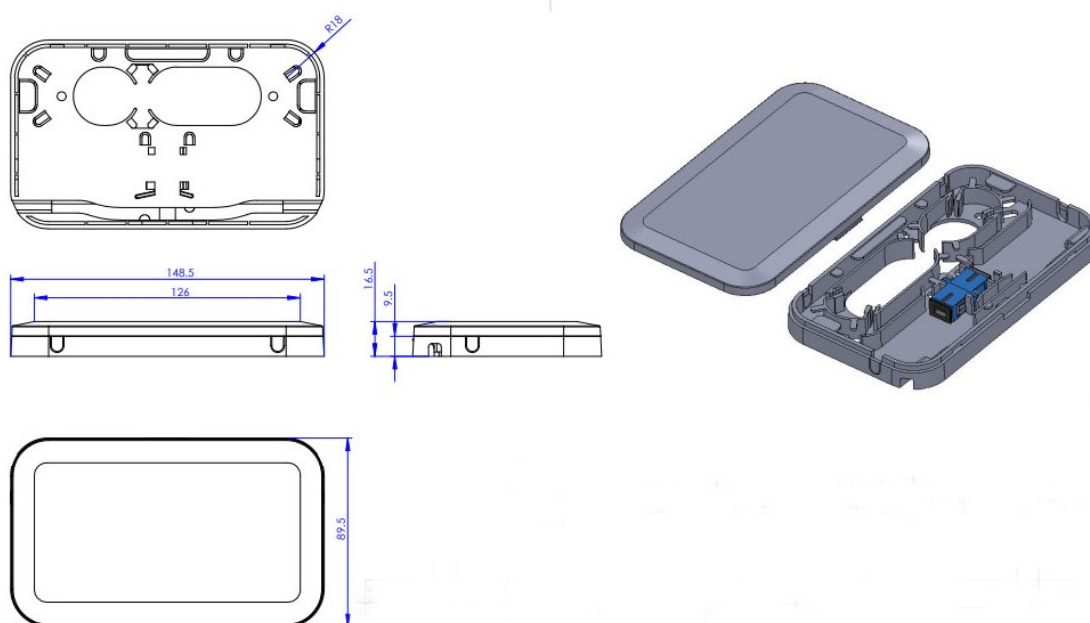

Included accessories

| Accessories | Quantity |
|-------------------|----------|
| Splice protectors | 1 |
| Wall fixings | 1 Set |

Excel Encasa Internal Point of Entry Box Loaded 1x SC/APC SX Adaptor SC/APC SM Pigtail 1 m

Item Code: 207-201



Standards

| Applicable standard | Detail |
|--|---|
| IEC 61754-1:2013 | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance |
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| EN 50173-1:2018 | Information technology. Generic cabling systems - General requirements |
| UL-94-V-0 | Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. NO flaming drips are allowed. |
| RoHS-II/-III (2011/65/EU & 2015/863): 2023 | Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III). |
| WFD: 2023 | Compliant to Waste Framework Directive |
| SCIP: 2023 | Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products) |
| POPs (EU) No 2019/1021 | EU Regulation for the restriction of Persistent Organic Pollutants. |

Part Number Table

| Part Number | Description |
|-------------|--|
| 207-201 | Excel Encasa Internal Point of Entry Box Loaded 1x SC/APC SX Adaptor SC/APC SM Pigtail 1 m |

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.