


Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 75 m

Part Code: 207-210-75

sales@excel-networking.com
excel-networking.com

CIBSE TM65 Embodied Carbon: 3.406 kg CO2e

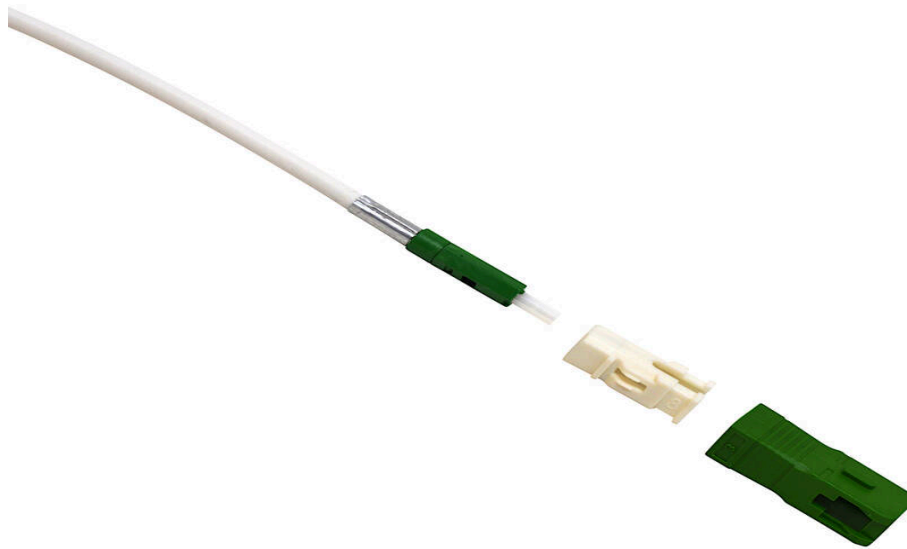

Main Features

- / Suitable for internal use only
- / G.657.A2
- / Pre-Terminated SC/APC ferrules
- / LSZH
- / Euroclass Cca-s1,d1,a1
- / Other lengths available on request

Product Overview

The Excel Encasa pre-terminated ferrule only drop cables have been designed for speed and ease of installation aimed at the FTTH and multi dwelling market.

The cable consists of a single core 900 µm tight buffer single mode G.657.A2 fibre surrounded by aramid yarn as a strength member covered with a white LSZH outer sheath available in LCA and SCA.

This unique design allows cables to be pushed down short runs of micro duct or installed onto tray work with the ferrule already terminated to the cable allowing smaller holes to be drilled through walls and cable to be passed through smaller enclosure entry ports.

The final termination is then a simple housing that is clicked into position removing the need for fusion splicing.

Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 75 m

Part Code: 207-210-75

sales@excel-networking.com
excel-networking.com

Product Specifications

| Feature | Values |
|---|-------------------|
| Number of Cores | 1 |
| Type of tube | Tight |
| Fibre type | Single mode 9/125 |
| Category | OS2 |
| Rodent resistant | no |
| Outer sheath colour | White |
| Low smoke (acc. IEC 61034-2) | yes |
| Reaction-to-fire class according to EN 13501-6 | Cca |
| Smoke development class according to EN 13501-6 | s1b |
| Euro class flaming droplets/particles according to EN 13501-6 | d1 |
| Euro class acidity according to EN 13501-6 | a1 |
| Outer diameter approx. | 3 mm |
| RAL-number | 9010 |

Additional specifications

| Features | Values |
|-----------------------|----------------------|
| Attenuation | @1310nm (dB/KM) ≤0.4 |
| | @1550nm (dB/KM) ≤0.3 |
| Strength member | Aramid yarn |
| Fibre color | Blue |
| Tight buffer material | LSZH |


Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 75 m

Part Code: 207-210-75

sales@excel-networking.com
excel-networking.com

| | |
|-----------------------------|---------------|
| Tight buffer diameter (mm) | 0.85 ± 0.05 |
| Outer jacket colour | White |
| Outer jacket material | LSZH |
| Outer jacket thickness (mm) | 0.45 ± 0.05 |
| Short term tensile strenght | 500 N |
| Minimum breaking tension | 1200 N |
| Cable diameter | 3 mm |
| Operating temperature | -20 to +65 °C |

Product drawings

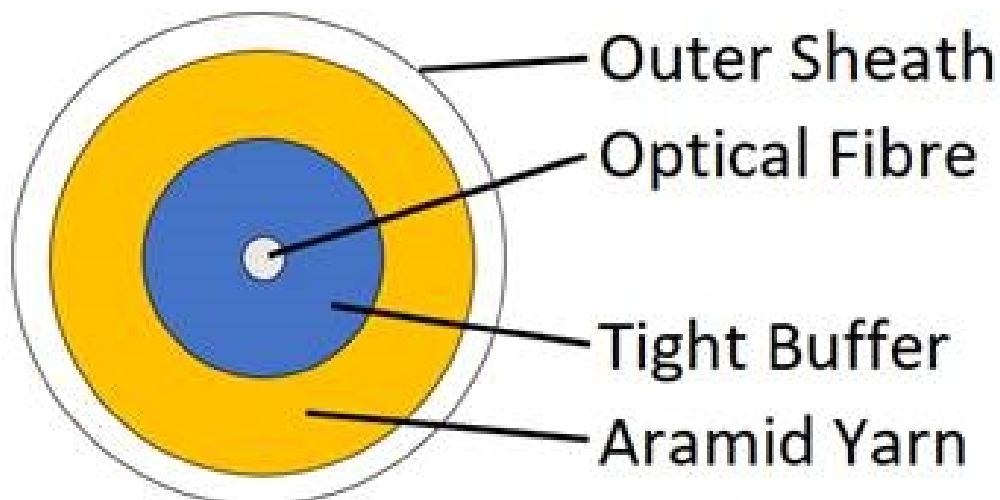

Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 75 m

Part Code: 207-210-75

sales@excel-networking.com
excel-networking.com

Standards

| Applicable standard | Detail |
|---------------------------|--|
| IEC 60332-1-2:2004 | Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame |
| IEC 60754-2:2014+A1:2020 | Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity |
| IEC 61034-2:2005+A2:2020 | Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements |
| IEC 60793-1-1:2022 | Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance |
| IEC 60793-1-20:2014 | Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry |
| IEC 60793-1-21:2001 | Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry |
| IEC 60793-1-22:2001 | Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement |
| IEC 60793-1-30:2010 | Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test |
| ITU G.652.D | Characteristics of a single-mode optical fibre and cable |
| EN 50173-1:2018 | Information technology. Generic cabling systems - General requirements |
| EN 50575: 2014 + A1: 2016 | Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements |
| EN 50399:2011+A1:2016 | Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results |

Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 75 m

Part Code: 207-210-75

sales@excel-networking.com
excel-networking.com

| | |
|------------------------------------|--|
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| ANSI/TIA 568-3.D | Optical Fiber Cabling and Components Standard |
| ANSI/TIA/EIA 598-D | Optical Fibre Cable Colour Coding |
| Directive 2011/65/EU (RoHS II) | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states). |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant. |
| Directive 2008/98/EC (WFD) | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988). |
| ECHA SCIP Database | Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH. |
| Regulation (EU) 2019/1021 (POPs) | EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355). |
| UK SI 2012 No. 3032 | The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019. |

Part Code Table

| Part Code | Description |
|------------|---|
| 207-210-05 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 5 m |
| 207-210-10 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 10 m |

Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 75 m

Part Code: 207-210-75

sales@excel-networking.com
excel-networking.com

| | |
|------------|--|
| 207-210-15 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 15 m |
| 207-210-20 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 20 m |
| 207-210-25 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 25 m |
| 207-210-30 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 30 m |
| 207-210-35 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 25 m |
| 207-210-40 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 40 m |
| 207-210-45 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 45 m |
| 207-210-50 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 50 m |
| 207-210-55 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 55 m |
| 207-210-60 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 60 m |
| 207-210-65 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 65 m |
| 207-210-70 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 70 m |
| 207-210-75 | Excel Encasa OS2 SM G.657.A2 Internal Drop Cable 1 Core 9/125 SCA Ferrule Both Ends 75 m |