

# Excel Encasa Din Rail SCA Module 2 Fibre with 30 m OS2 G.657.A2 4 mm Drop Cable

Item Code: 207-401-30



Integrated fibre management

Hinged doors

DIN rail release latch

Shuttered adaptors

## Product Overview

The Excel Encasa DIN rail mount box has been designed for industrial and FTTH application. This wall outlet also has an integrated DIN rail mounting position for installations requiring DIN mounting capability.

Pre-terminated with a 2 core 900  $\mu\text{m}$  Cca-s1a,d0,a1 drop cable 30 m in length terminated one end with 2x SC/APC connectors and open at the other, allows quick installation within the customer premises.

## Product Specifications

Feature	Values
Surface mounted	yes
Type of connector	SC/APC simplex
With couplers	yes
Suitable for number of couplers	2
Suitable for type of fibre	Single mode
Width	18 mm
Height	85 mm
Depth	61 mm

# Excel Encasa Din Rail SCA Module 2 Fibre with 30 m OS2 G.657.A2 4 mm Drop Cable

Item Code: 207-401-30



## Additional specifications


Features	Values
Colour	White
Operating temperature	-20 to +85 °C
Cable diameter	4mm
Fibre type	9/125 G.657.A2
Core size	900µm
Reaction-to-fire class according to EN 13501-6	Cca
Smoke development class according to EN 13501-6	s1a
Euro class flaming droplets/particles according to EN 13501-6	d0
Euro class acidity according to EN 13501-6	a1
UL-94-V-0	Yes

# Excel Encasa Din Rail SCA Module 2 Fibre with 30 m OS2 G.657.A2 4 mm Drop Cable

Item Code: 207-401-30

**excel**  
without compromise.

## Product drawings

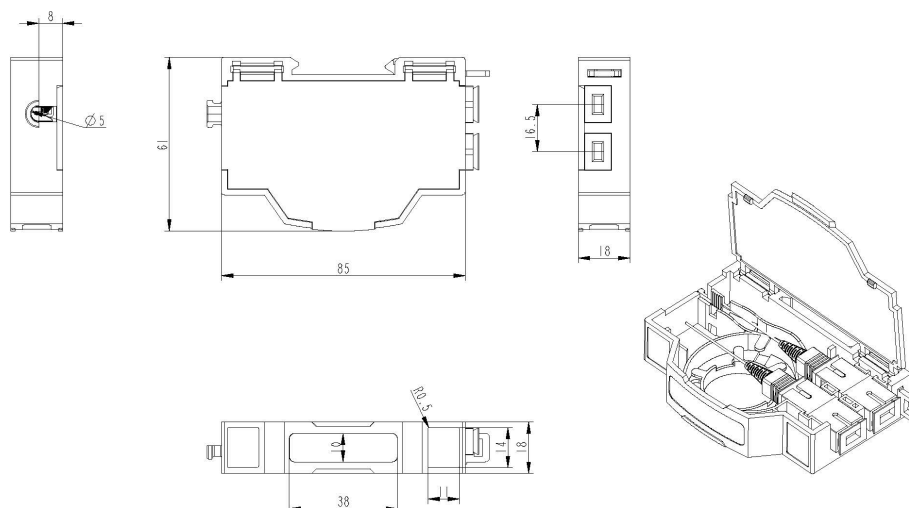

## Standards

Applicable standard	Detail
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
UL-94-V-0	Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. NO flaming drips are allowed.
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.

# Excel Encasa Din Rail SCA Module 2 Fibre with 30 m OS2 G.657.A2 4 mm Drop Cable

Item Code: 207-401-30



Directive 2008/98/EC (WFD)

Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).

ECHA SCIP Database

Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.

Regulation (EU) 2019/1021 (POPs)

EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).

UK SI 2012 No. 3032

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

## Part Number Table

Part Number	Description
207-400-30	Excel Encasa Din Rail SCA Module 1 Fibre with 30 m OS2 G.657.A2 4 mm Drop Cable
207-400-50	Excel Encasa Din Rail SCA Module 1 Fibre with 50 m OS2 G.657.A2 4 mm Drop Cable
207-401-30	Excel Encasa Din Rail SCA Module 2 Fibre with 30 m OS2 G.657.A2 4 mm Drop Cable
207-401-50	Excel Encasa Din Rail SCA Module 2 Fibre with 50 m OS2 G.657.A2 4 mm Drop Cable

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at [sales@excel-networking.com](mailto:sales@excel-networking.com)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.