Excel Encasa Din Rail SCA Module 2 Fibre with 30 m OS2 G.657.A2 4 mm Drop Cable

Part Code: 207-401-30

sales@excel-networking.com
excel-networking.com



Main Features

/ Intergrated fibre management

/ DIN rail release latch

/ Hinged doors

/ Shuttered adaptors

Product Overview

The Excel Encasa DIN rail mount box has been designed for intustrial and FTTH application. This wall outlet also has an intergrated DIN rail mounting position for installations requiring DIN mounting capability.

Pre-terminated with a 2 core 900 µm Cca-s1a,d0,a1 drop cable 30 m in length terminated one end with 2x SC/APC connectors and open at the other, allows quick installation within the customer premises.

Product Specifications

Feature	Values

This data sheet was generated at 3:54am 17th November 2026 and is subject to change at any time.

Surface mounted	**yes**
Type of connector	**SC/APC simplex**
With couplers	**yes**
Suitable for number of couplers	**2**
Suitable for type of fibre	**Single mode**
Width	**18 mm**
Height	**85 mm**
Depth	**61 mm**


Additional specifications

Features	Values
Colour	**White**
Operating temperature	**-20 to +85 °C**
Cable diameter	**4mm**
Fibre type	**9/125 G.657.A2**
Core size	**900µm**
Reaction-to-fire class according to EN 13501-6	**Cca**
Smoke development class according to EN 13501-6	**s1a**
Euro class flaming droplets/particles according to EN 13501-6	**d0**
Euro class acidity according to EN 13501-6	**a1**
UL-94-V-0	**Yes**

This data sheet was generated at 3:54am 17th November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

Product drawings

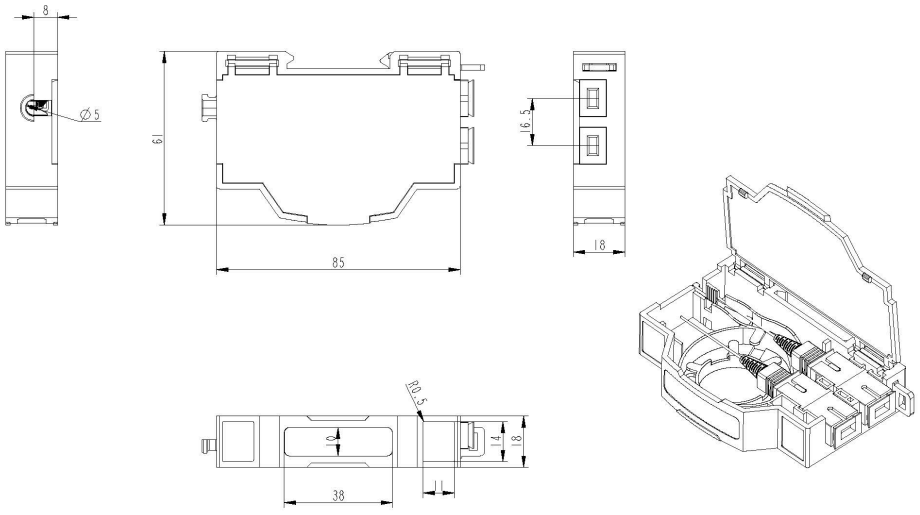

Standards

Applicable standard	Detail
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
UL-94-V-0	Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. NO flaming drips are allowed.

This data sheet was generated at 3:54am 17th November 2026 and is subject to change at any time.

Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Part Code Table

Part Code	Description
207-400-30	**Excel Encasa Din Rail SCA Module 1 Fibre with 30 m OS2 G.657.A2 4 mm Drop Cable**
207-400-50	**Excel Encasa Din Rail SCA Module 1 Fibre with 50 m OS2 G.657.A2 4 mm Drop Cable**
207-401-30	**Excel Encasa Din Rail SCA Module 2 Fibre with 30 m OS2 G.657.A2 4 mm Drop Cable**
207-401-50	**Excel Encasa Din Rail SCA Module 2 Fibre with 50 m OS2 G.657.A2 4 mm Drop Cable**

This data sheet was generated at 3:54am 17th November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

This data sheet was generated at 3:54am 17th November 2026 and is subject to change at any time.