## Excel Encasa FTTH 2 Fibre SCA Outlet Loaded with 2 x SCA Simplex Shuttered Adaptors

Item Code: 207-404





- X Hinged splice tray holds up to 4 heatshrink splice protectors
- X Multiple cable entry points
- X Accepts up to 4 SC Simplex adaptors
- X Fixing hardware included

### **Product Overview**

The Excel Encasa FTTH surface mount box has been designed for applications such as fibre to the home or fibre to the desk. This wall outlet also has an intergrated DIN rail mounting position for installations requiring DIN mounting capability and comes preloaded with 2x SC/APC adaptor.

## **Product Specifications**

Surface mountedyesType of connectorSC/APC simplexWith couplersyesSuitable for number of couplers2Suitable for type of fibreSingle modeWidth80 mm	Feature	Values
With couplers yes  Suitable for number of couplers 2  Suitable for type of fibre Single mode	Surface mounted	yes
Suitable for number of couplers 2 Suitable for type of fibre Single mode	Type of connector	SC/APC simplex
Suitable for type of fibre Single mode	With couplers	yes
	Suitable for number of couplers	2
Width 80 mm	Suitable for type of fibre	Single mode
	Width	80 mm
Height 80 mm	Height	80 mm
Depth 28 mm	Depth	28 mm

# Excel Encasa FTTH 2 Fibre SCA Outlet Loaded with 2 x SCA Simplex Shuttered Adaptors


Item Code: 207-404



## **Additional specifications**

Features	Values
Material	ABS plastic
Colour	White
Operating temperature	-20 to +85 °C
UL-94-V-0	Yes

## **Product drawings**

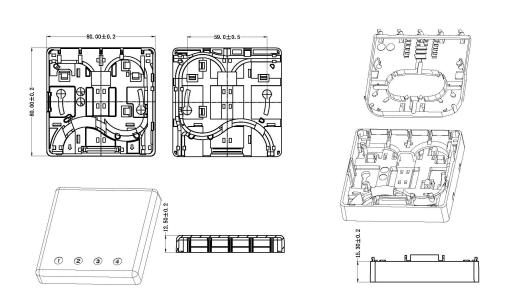

## **Standards**

Applicable standard	Detail
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements

# Excel Encasa FTTH 2 Fibre SCA Outlet Loaded with $2 \times SCA$ Simplex Shuttered Adaptors

Item Code: 207-404



EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
UL-94-V-0	Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. NO flaming drips are allowed.
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

### **Part Number Table**

Part Number	Description
207-403	Excel Encasa FTTH 1 Fibre SCA Outlet Loaded with 1 x SCA Simplex Shuttered Adaptors
207-404	Excel Encasa FTTH 2 Fibre SCA Outlet Loaded with 2 $\times$ SCA Simplex Shuttered Adaptors
207-405	Excel Encasa FTTH 4 Fibre SCA Outlet Loaded with 4 x SCA Simplex Shuttered Adaptors

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

