


Excel Enbeam High Density 12 Port 24 Fibre OS2 LC-MTP Cassette Loaded

Part Code: 208-136

sales@excel-networking.com
excel-networking.com

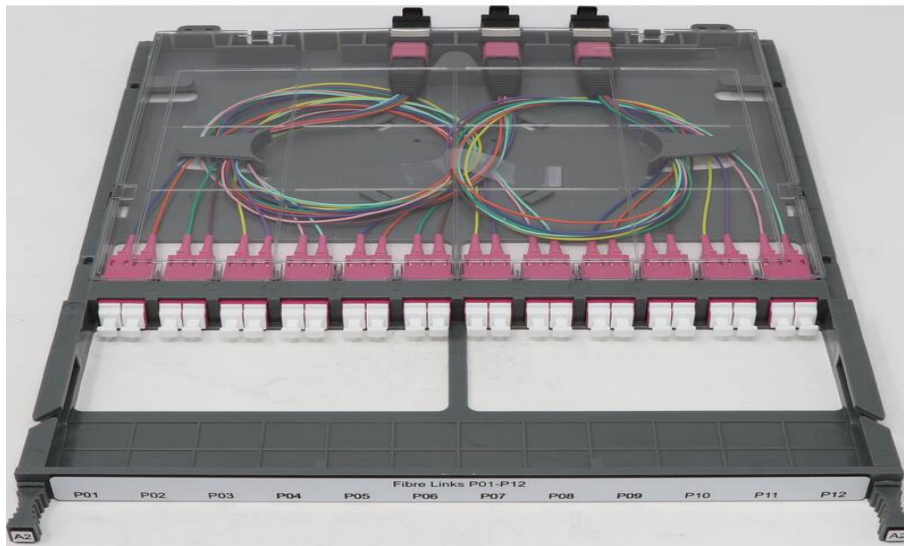

Main Features

- / High Density 24 LC to 3 x MTP cassette
- / 3 X 8 Fibre MTP at rear
- / Part of the Excel HD panel system
- / MTP US-Conec Elite connectors
- / Standard, MOD1 and MOD2 versions
- / OS2, OM3 and OM4 options

Product Overview

The Excel LC-MTP High-Density cassette is designed for the Excel HD 1U panel, which has a capacity for 6 cassettes, offering up to 144 fibres per 1U. A range of cassettes are offered and can be mixed and matched as required to offer a highly dense and flexible system for both LC and MTP connectivity.

The LC MTP cassettes come complete with LC Adaptors at the front and MTP couplers at the rear, with an MTP-LC fan-out fibre assembly installed & factory tested. The cassettes are available in OS2, OM3 and OM4, configured standard or MOD 1 or MOD2.

The cassettes can be inserted into the panel from the front or the rear and feature 2 physical stops, one installed and one for patching.

The panel also offers full and innovative patchcord management to the front and cable management to the rear.

Excel Enbeam High Density 12 Port 24 Fibre OS2 LC-MTP Cassette Loaded

Part Code: 208-136

sales@excel-networking.com
excel-networking.com

Product Specifications

| Feature | Values |
|------------------------------------|------------|
| Suitable for number of fibre cores | 24 |
| With coupling/adaptor | yes |
| Type of connector external | LC |
| Type of connector interior | MTP |
| Fibre type | Multi mode |
| Colour | Grey |

Additional specifications


| Features | Values |
|-----------------------|---------------------------|
| Operating Temperature | -40 to +80 °C |
| Capacity | 24 LC-Fibres per cassette |
| Width | 212.8mm |
| Height | 12.4mm |
| Depth | 287.3mm |
| Material Coating | ABS UL94-V0 |
| Colour | Grey |

Excel Enbeam High Density 12 Port 24 Fibre OS2 LC-MTP Cassette Loaded

Part Code: 208-136

sales@excel-networking.com
excel-networking.com

Product drawing

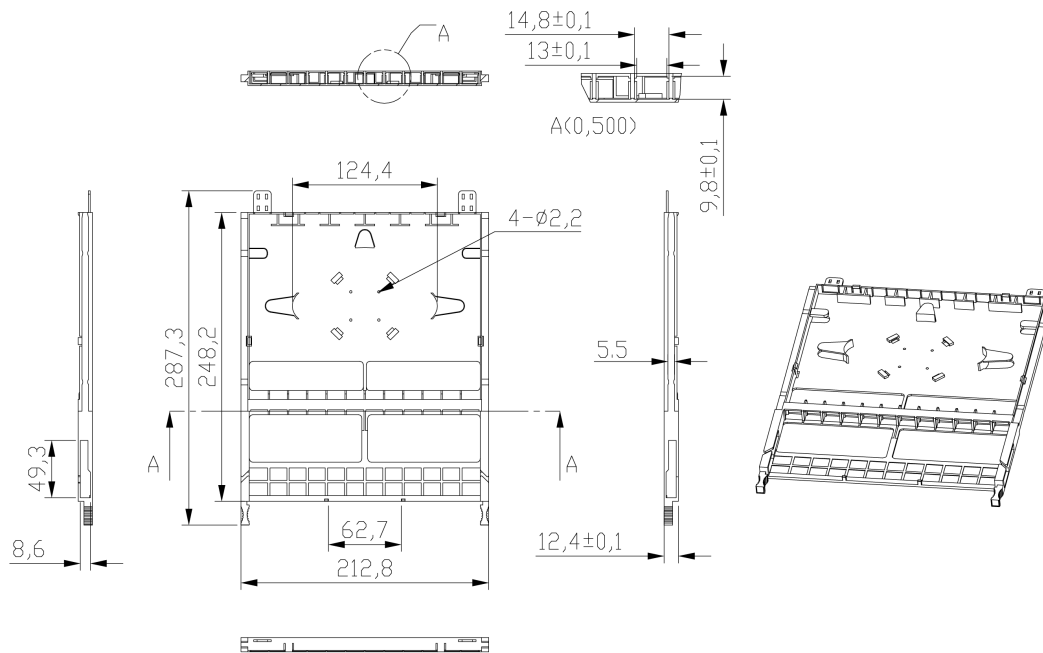

Standards

| Applicable standard | Detail |
|------------------------------------|--|
| IEC 61754-1:2013 | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance |
| Directive 2011/65/EU (RoHS II) | Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states). |
| Directive (EU) 2015/863 (RoHS III) | Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant. |
| Directive 2008/98/EC (WFD) | Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988). |

Excel Enbeam High Density 12 Port 24 Fibre OS2 LC-MTP Cassette Loaded

Part Code: 208-136

sales@excel-networking.com
excel-networking.com

ECHA SCIP Database

Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.

Regulation (EU) 2019/1021 (POPs)

EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).

UK SI 2012 No. 3032

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Part Code Table

| Part Code | Description |
|-----------|--|
| 208-136 | Excel Enbeam High Density 12 Port 24 Fibre OS2 LC-MTP Cassette Loaded |