Excel Enbeam 288 Fibre Optic Splice Closure (FOSC) with Mechanical Seals (Dome Type)

Part Code: 208-508

sales@excel-networking.com
excel-networking.com



Main Features

- / IP68 rated to 1.5 meters
- / Integrated pressure valve
- / Includes 24 splice trays
- / Holds up to 288 single fibres
- / Mechanically sealed (compression)
- / Includes 288 splice protectors

Product Overview

The Enbeam Hinged 288 Fibre Splice Enclosure has been designed to allow up to 288 fibres to be spliced and housed within an IP68 rated durable enclosure, which is ideal for harsh environment applications. The enclosure is mechanically sealed via compression glands to allow re-entry without compromising the integrity of the unit. The enclosures have the ability to be mounted in several ways using different mounting brackets (see additional mounting options); wall, pit, pole and aerial. The enclosure can be expanded to take up to 288 fibres by increasing the number of trays (see additional tray options).

Product Specifications

This data sheet was generated at 4:31am 21st November 2026 and is subject to change at any time.

Feature	Values
Surface mounted	**yes**
Duct installation	**yes**
Type of fastening	**Screwing**
With couplers	**no**
Suitable for type of fibre	**Multi mode/single mode**
IP-rating	**IP68**
Height	**480 mm**

Additional specifications

Features	Values
Maximum number of fibres	**288**
Fibres per tray	**12**
Number of trays	**24**
Number of large cable ports	**2**
Suitable for cable diameter	**8 to 17.5mm Ø**
Number of small cable ports	**4**
Suitable for cable diameter	**8 to 17.5mm Ø**
IP rating	**IP68 to 1.5mtr**
Sealing method for all entry and exit	**Mechanical (compression)**
Weight	**6.5kg**
Colour	**Black**
Material	**ABS**
Mounting kit included	**Wall/pole**

This data sheet was generated at 4:32am 21st November 2026 and is subject to change at any time.

Operating temperature	**-40 °C to +65 °C**


Included accessories


Accessories	Quantity
Splice protectors	**288**
Nylon tie	**48**
wall mounting bracket	**1**
Insulation tape	**1 reel**
Transit tubing	**6mtr**
Plastic sealing tool	**1**
Blanking plugs	**6**

This data sheet was generated at 4:32am 21st November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

Product drawing

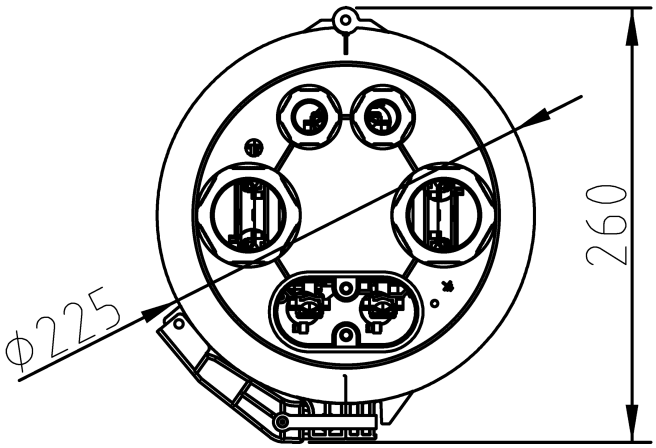

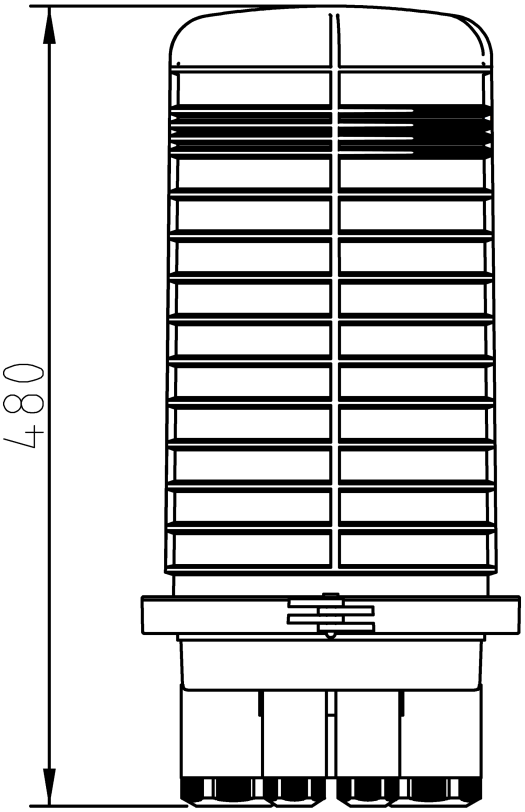

This data sheet was generated at 4:32am 21st November 2026 and is subject to change at any time.

Standards

Applicable standard	Detail
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

This data sheet was generated at 4:32am 21st November 2026 and is subject to change at any time.

sales@excel-networking.com
excel-networking.com

Part Code Table

Part Code	Description
208-508	**Excel Enbeam 288 Fibre Optic Splice Closure (FOSC) with Mechanical Seals (Dome Type)**

This data sheet was generated at 4:32am 21st November 2026 and is subject to change at any time.