

Excel Enbeam 6 Fibre Splice Tray for FOSC 208-518 to 208-523

Part Code: 208-532

sales@excel-networking.com
excel-networking.com



Main Features

- / For up to 6 fibre
- / Accepts 45mm splice protectors
- / Colour options available on request
- / RoHs compliant
- / UL-94-V-0

Product Overview

The Enbeam 12 Fibre splice tray has been designed with fibre management in mind. The integrated fibre routing assures the bend radius of the fibre is maintained at all times with tabs to hold the fibre in place. Each tray has a designated area to hold up to 6 double stacked splice protectors.

Product Specifications

Feature	Values
---------	--------

Excel Enbeam 6 Fibre Splice Tray for FOSC 208-518 to 208-523

Part Code: 208-532

sales@excel-networking.com
excel-networking.com

Type of accessory/spare part

6 way splice tray

Additional specifications


Features	6-Fibre version	12-Fibre version	Splitter tray
Operating Temperature	-40 to +80 °C	-40 to +80 °C	-40 to +80 °C
Suitable for Splice protectors	45mm	45mm	-
Material	ABS	ABS	ABS
Bend Radius	30mm	30mm	30mm
Colour	White	White	Red
Width	133mm	133mm	133mm
Depth	110mm	110mm	110mm
Height	4mm	8mm	8mm
1 x 4 splitter positions	-	-	2
1 x 8 splitter positions	-	-	1
Maximum splitter dimension	-	-	60mm x 7mm x 4mm

Excel Enbeam 6 Fibre Splice Tray for FOSC 208-518 to 208-523

Part Code: 208-532

sales@excel-networking.com
excel-networking.com

Product drawing

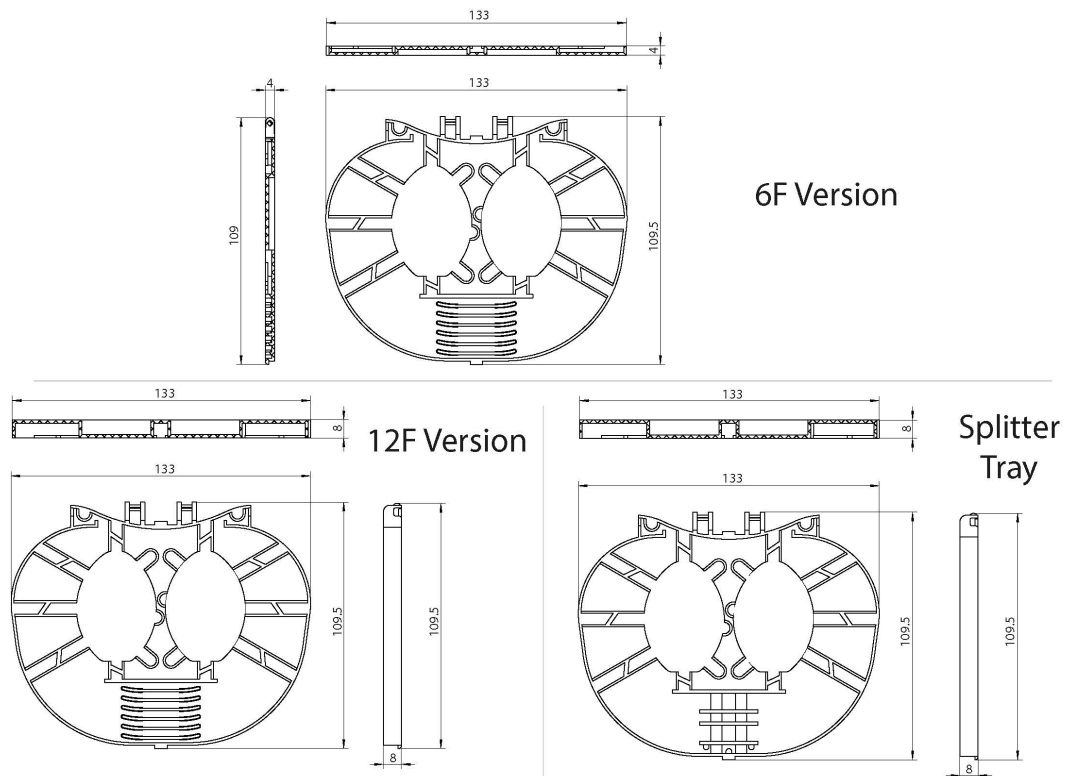

Standards

Applicable standard	Detail
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements

Excel Enbeam 6 Fibre Splice Tray for FOSC 208-518 to 208-523

Part Code: 208-532

sales@excel-networking.com
excel-networking.com

EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
UL-94-V-0	Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. No flaming drips are allowed.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Part Code Table

Part Code	Description
208-532	Excel Enbeam 6 Fibre Splice Tray for FOSC 208-518 to 208-523
208-533	Excel Enbeam 12 Fibre Splice Tray for FOSC 208-518 to 208-523
208-534	Excel Enbeam PLC Splitter Tray for FOSC 208-518 to 520-523