Excel Enbeam 12 Fibre Splice Tray for FOSC 208-518 to 208-523

Part Code: 208-533

sales@excel-networking.com
excel-networking.com



Main Features

/ For up to 12 fibre
/ Colour options available on request
/ UL-94-V-0
/ Accepts 45mm splice protectors
/ RoHs compliant

Product Overview

The Enbeam 12 Fibre splice tray has been designed with fibre management in mind. The integrated fibre routing assures the bend radius of the fibre is maintained at all times with tabs to hold the fibre in place. Each tray has a designated area to hold up to 6 double stacked splice protectors.

Product Specifications

Feature	Values

This data sheet was generated at 4:17am 3rd November 2026 and is subject to change at any time.

Type of accessory/spare part	**12 way splice tray**

Additional specifications

Features	6-Fibre version	12-Fibre version	Splitter tray
Operating Temprature	**-40 to +80 °C**	**-40 to +80 °C**	**-40 to +80 °C**
Suitable for Splice protectors	**45mm**	**45mm**	**-**
Material	**ABS**	**ABS**	**ABS**
Bend Radius	**30mm**	**30mm**	**30mm**
Colour	**White**	**White**	**Red**
Width	**133mm**	**133mm**	**133mm**
Depth	**110mm**	**110mm**	**110mm**
Height	**4mm**	**8mm**	**8mm**
1 x 4 splitter positions	**-**	**-**	**2**
1 x 8 splitter positions	**-**	**-**	**1**
Maximum splitter dimension	**-**	**-**	**60mm x 7mm x 4mm**


This data sheet was generated at 4:17am 3rd November 2026 and is subject to change at any time.

Excel Enbeam 12 Fibre Splice Tray for FOSC 208-518 to 208-523

Part Code: 208-533

sales@excel-networking.com
excel-networking.com

Product drawing

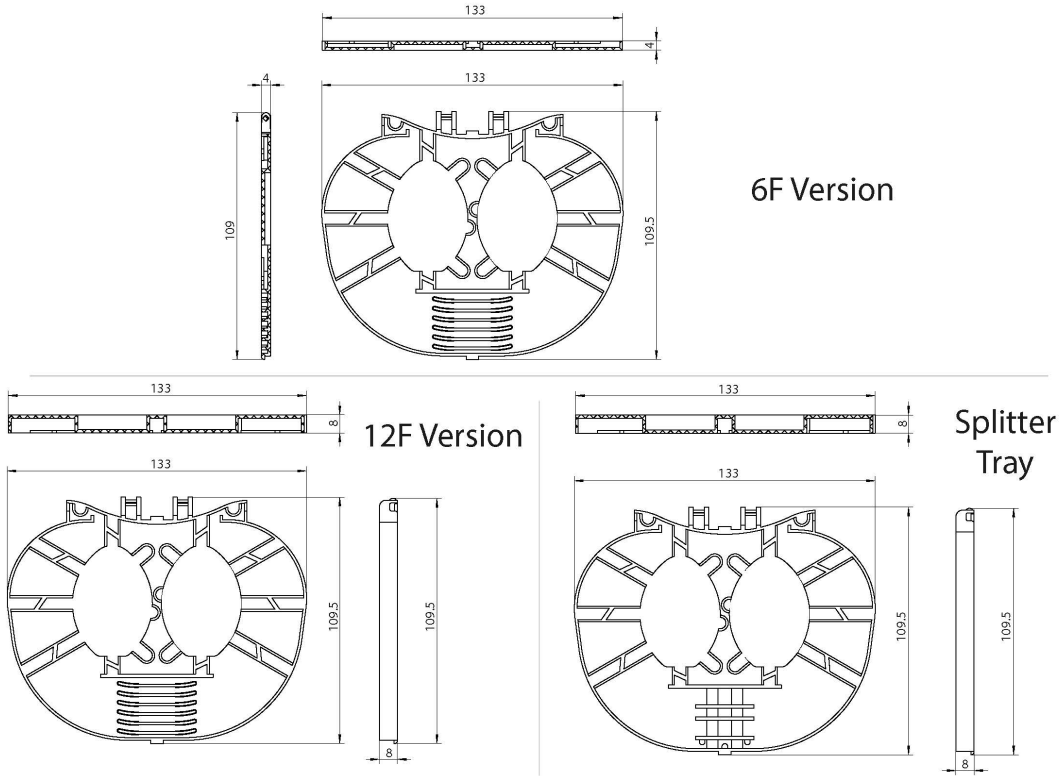

Standards

Applicable standard	Detail
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements

This data sheet was generated at 4:17am 3rd November 2026 and is subject to change at any time.

EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
UL-94-V-0	Burning stops within 10 seconds after two applications of ten seconds each of a fl ame to a test bar. No flaming drips are allowed.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.
Regulation (EU) 2019/1021 (POPs)	EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).
UK SI 2012 No. 3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

Part Code Table

Part Code	Description
208-532	**Excel Enbeam 6 Fibre Splice Tray for FOSC 208-518 to 208-523**
208-533	**Excel Enbeam 12 Fibre Splice Tray for FOSC 208-518 to 208-523**
208-534	**Excel Enbeam PLC Splitter Tray for FOSC 208-518 to 520-523**

This data sheet was generated at 4:17am 3rd November 2026 and is subject to change at any time.