Excel Enbeam SC Singlemode 20dB Attenuator

Item Code: 208-555









- X Compact design
- X Easy to connect/ disconnect
- X Available in SC/APC, SC/UPC, LC/UPC and LC/APC
- X Available in fixed attenuation values of 1/2/5/10/15/20 dB
- 25 Year system warranty

Product Overview

The Excel Enbeam Fixed value attenuators are used to match signal power to receiver dynamic range in optical networks. The Excel range of singlemode high performance devices are designed to give accurate attenuation over a wide range of wavelengths.

The plug type configuration allows easy to use functionality 'straight out of the box'. This allows connection directly to the fibre patch cord, for insertion onto the adaptor.

Product Specifications

Feature	Values
Signal attenuation	20 dB
Ambient temperature	-4075 °C
Fibre type	Single mode 9/125
Connector connection 1	SC

Additional specifications

Features	Values
Ferrule Type	Zirconia Ceramic
Operating Wavelength (nm)	1310nm, 1550nm
Attenuation accuracy 1-5 dB	±0.5dB
Attenuation accuracy 10 dB	±0.75dB
Attenuation accuracy 15-20 dB	±10% overall dB


Excel Enbeam SC Singlemode 20dB Attenuator

Item Code: 208-555



Return loss (UPC)	≥55dB
Return loss (APC)	≥65dB
Mating Durability	≥1000 cycle
Housing	Zinc Alloy

Product drawing

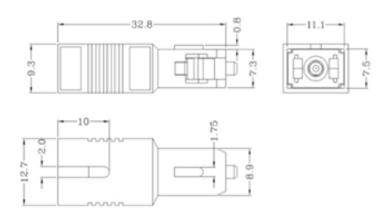

Standards

Applicable standard	Detail	
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).	
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance	
WFD: 2023	Compliant to Waste Framework Directive	
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)	
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.	

Excel Enbeam SC Singlemode 20dB Attenuator

Item Code: 208-555



Part Number Table

208-550 Enbeam SC singlemode 3	ldb attenuator
208-551 Excel Enbeam SC Singler	node 2dB Attenuator
208-552 Excel Enbeam SC Singler	node 5dB Attenuator
208-553 Excel Enbeam SC Singler	node 10dB Attenuator
208-554 Excel Enbeam SC Singler	node 15dB Attenuator
208-555 Excel Enbeam SC Singler	node 20dB Attenuator
208-556 Excel Enbeam SCA Single	emode 1dB Attenuator
208-557 Excel Enbeam SCA Single	emode 2dB Attenuator
208-558 Excel Enbeam SCA Single	emode 5dB Attenuator
208-559 Excel Enbeam SCA Single	emode 10dB Attenuator
208-560 Excel Enbeam SCA Single	emode 15dB Attenuator
208-561 Excel Enbeam SCA Single	emode 20dB Attenuator

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.



Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.