


Excel Enbeam LC Singlemode 15dB Attenuator

Item Code: 208-566

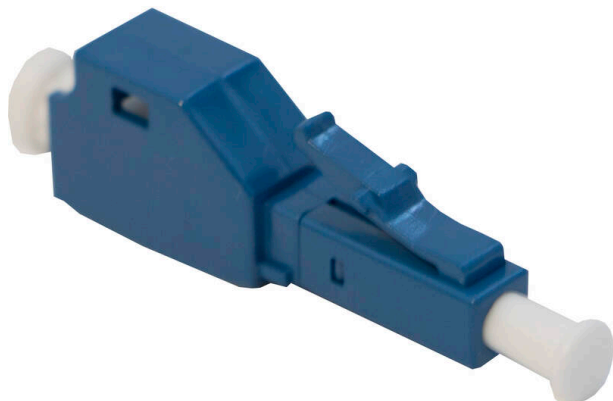

✕ Compact design

✕ Easy to connect/ disconnect

✕ Available in SC/APC, SC/UPC, LC/UPC and LC/APC

✕ Available in fixed attenuation values of 1/2/3/5/7/10/15/20 dB

✕ 25 Year system warranty

Product Overview

The Excel Enbeam Fixed value attenuators are used to match signal power to receiver dynamic range in optical networks. The Excel range of singlemode high performance devices are designed to give accurate attenuation over a wide range of wavelengths.

The plug type configuration allows easy to use functionality 'straight out of the box'. This allows connection directly to the fibre patch cord, for insertion onto the adaptor.

Product Specifications

Feature	Values
Signal attenuation	15 dB
Ambient temperature	-40...75 °C
Fibre type	Single mode 9/125
Connector connection 1	LC

Additional specifications

Features	Values
Ferrule Type	Zirconia Ceramic
Operating Wavelength (nm)	1310nm, 1550nm
Attenuation accuracy 1-5 dB	±0.5dB
Attenuation accuracy 10 dB	±0.75dB
Attenuation accuracy 15-20 dB	±10% overall dB


Excel Enbeam LC Singlemode 15dB Attenuator



Item Code: 208-566

Return loss (UPC)	≥55dB
Return loss (APC)	≥65dB
Mating Durability	≥1000 cycle
Housing	Zinc Alloy

Product drawing

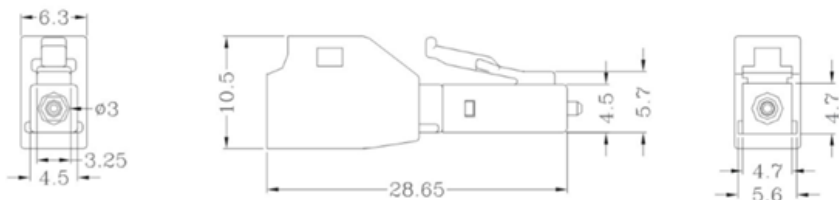

Standards

Applicable standard	Detail
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
IEC 61754-1:2013	Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

Excel Enbeam LC Singlemode 15dB Attenuator

Item Code: 208-566



Part Number Table

Part Number	Description
208-562	Excel Enbeam LC Singlemode 1dB Attenuator
208-563	Excel Enbeam LC Singlemode 2dB Attenuator
208-564	Excel Enbeam LC Singlemode 5dB Attenuator
208-565	Excel Enbeam LC Singlemode 10dB Attenuator
208-566	Excel Enbeam LC Singlemode 15dB Attenuator
208-567	Excel Enbeam LC Singlemode 20dB Attenuator
208-568	Enbeam LCA singlemode 1db attenuator
208-569	Excel Enbeam LCA Singlemode 2dB Attenuator
208-570	Excel Enbeam LCA Singlemode 5dB Attenuator
208-571	Excel Enbeam LCA Singlemode 10dB Attenuator
208-572	Excel Enbeam LCA Singlemode 15dB Attenuator
208-573	Excel Enbeam LCA Singlemode 20dB Attenuator
208-574	Excel Enbeam LC Singlemode 3 dB Attenuator
208-575	Excel Enbeam LC Singlemode 7 dB Attenuator

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.