

# Excel Enbeam 24 Way Internal 5/3.5 mm Blowing Tube LSOH White

excel  
without compromise.

Part Code: 208-810

sales@excel-networking.com  
excel-networking.com



## Main Features

- / Internal application
- / Available up to 24x5 mm bundles
- / Euroclass: B2ca-s1,d0 and RoHS compliant
- / LSOH sheath
- / Crush and impact resistant
- / 25 year system warranty

## Product Overview

Enbeam Internal blowing tubes have been designed to allow blown fibre to be distributed internally. The internally grade tubes are over-sheathed with Polyethylene and Halogen free (HF) flame retardant material foil. The tubes have a low friction inner coating to reduce drag and maximise blowing distances.

The compact tubes can accommodate Excel fibre units containing from 2 to 12 fibres and all internal tubes are numbered for identification purposes.

The tubes are easy to terminate and branch-off using suitable Excel connection closures and push-fit connectors.

The tubes are supplied on disposable wooden drums and capped at both ends to prevent ingress of moisture or contamination.

# Excel Enbeam 24 Way Internal 5/3.5 mm Blowing Tube LS0H White

Part Code: 208-810

sales@excel-networking.com  
excel-networking.com

## Product Specifications

Feature	Values
Halogen free	yes
Outer sheath colour	White

## Additional specifications

Features	Values
Transport and storage temperature range	-40°C to +70°C
Installation temperature range	-10°C to +50°C
Operating temperature range	-40°C to +70°C
Outdoor exposure limit in Central Europe	max. 12 months


# Excel Enbeam 24 Way Internal 5/3.5 mm Blowing Tube LSOH White

Part Code: 208-810

sales@excel-networking.com  
excel-networking.com

## Product drawing

### PRODUCT DRAWING

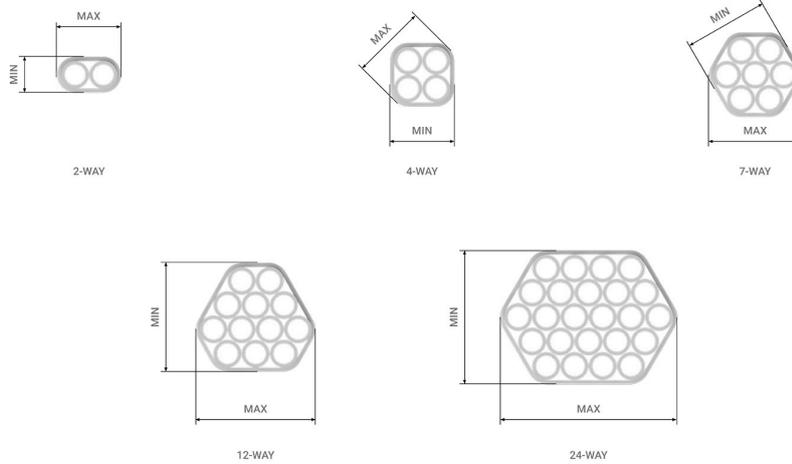

## Additional specifications

Features	2x5/3.5	4x5/3.5	7x5/3.5	12x5/3.5	19x5/3.5	24x5/3.5
MAX (mm)	11.5	14	16.5	21.5	26.5	31.5
MIN (mm)	6.5	11.5	15.5	20	24	24
Sheath thickness (mm)	0.75	0.75	0.75	0.75	0.75	0.75
Installation tensile force, max	200 N	400 N	700 N	1200 N	1900 N	2400 N
Min. bending radius $\perp$ MAX (mm)	65	140	165	200	265	240

# Excel Enbeam 24 Way Internal 5/3.5 mm Blowing Tube LSOH White

Part Code: 208-810

sales@excel-networking.com  
excel-networking.com

Min. bending radius $\perp$ MIN (mm)	115	115	N/A	N/A	N/A	315
Weight (kg/km)	41	65	109	182	262	320

## Standards

Applicable standard	Detail
EN ISO 291:2008	Plastics – Standard atmospheres for conditioning and testing
EN ISO 2505:2005	Thermoplastics pipes – Longitudinal reversion – Test method
ČSN 010254:1976	Sampling inspection by attributes
EN ISO 1167-1:2006	Thermoplastics pipes, fittings and assemblies for the conveyance of fluids – Determination of the resistance to internal pressure
EN 12201-1:2011	Plastics piping systems for water supply, and for drainage and sewerage under pressure – PE
EN 12201-2:2011+A1:2013	Plastics piping systems for water supply, and for drainage and sewerage under pressure – Polyethylene (PE) – Part 2: Pipes
EN ISO 3127:2017	Plastics piping and ducting systems – Thermoplastics pipes – Test method for resistance to external blows by the round-the-clock method
IEC 60 794-1-1:2015	Optical fibre cables – Part 1-1: Generic specification – General
IEC 60 794-1-2:2017	Optical fibre cables – Part 1-2: Generic specification – Basic optical cable test procedures – General guidance
IEC 60794-1-21:2015+AMD1:2020	Optical fibre cables – Part 1-21: Generic specification – Basic optical cable test procedures – Mechanical tests

# Excel Enbeam 24 Way Internal 5/3.5 mm Blowing Tube LSOH White

Part Code: 208-810

sales@excel-networking.com  
excel-networking.com

	methods
IEC 60 794-1-22:2017	Optical fibre cables – Part 1-22: Generic specification – Basic optical cable test procedures – Environmental tests methods
IEC 60 794-1-23:2019	Optical fibre cables – Part 1-23: Generic specification – Basic optical cable test procedures – Cable element test methods
EN IEC 60 794-1-24:2014	Optical fibre cables – Part 1-24: Generic specification – Basic optical cable test procedures – Electrical test methods
IEC 60 794-2:2017	Optical fibre cables – Part 2: Indoor cables – Sectional specification
ASTM D 1894-14	Standard Test Method for Static and Kinetic Coefficient of Friction of Plastic Film and Sheeting
ASTM D2122-16	Standard Test Method for Determining Dimensions of Thermoplastic Pipe and Fittings
EN 13501-1:2018	Fire classification of construction products and building elements – Part 1: Classification using data from reaction to fire tests
ISO 6259-1,2,3:1997-2015	Thermoplastic pipes – Determination of tensile properties
ISO 3126:2005	Plastics piping systems – Plastics components – Determination of dimensions
ISO 527-1:2019	Plastics – determination of tensile properties – Part 1: General principles
ISO 1133-1:2011	Determination of the melt mass-flow rate (MFR) and the melt volume-flow rate (MVR) of thermoplastics
EN 61386-24:2010	Conduit systems for cable management – Part 24: Particular requirements – Conduit systems buried underground.
ISO 1183-1:2019	Plastics – Methods for determining the density of non-cellular plastics – Part 1: Immersion method, liquid pycnometer method and titration method
ISO 1183-2:2019	Part 2: Density gradient column method
ISO 6964:2019	Polyolefin pipes and fittings – Determination of carbon

# Excel Enbeam 24 Way Internal 5/3.5 mm Blowing Tube LS0H White

Part Code: 208-810

sales@excel-networking.com  
excel-networking.com

	black content by calcination and pyrolysis – Test method
ISO 18553:2002+Amd 1:2007	Method for the assessment of the degree of pigment or carbon black dispersion in polyolefin pipes, fittings and compounds
ISO 9969:2016	Thermoplastics pipes – Determination of ring stiffness
EN ISO 13263:2017	Thermoplastics piping systems for non-pressure underground drainage and sewerage – Thermoplastics fittings – Test method for impact strength
IEC 60304:1982	Color code
ASTM D 1693:2015	Standard Test Method for Environmental Stress Cracking of Ethylene Plastics
ISO 11357-6:2018	Plastics – Differential scanning calorimetry (DSC) – Part 6: Determination of oxidation induction time (isothermal OIT) and oxidation induction temperature (dynamic OIT)
ČSN EN ISO 899-2:2003/A1:2015	Plastics – Determination of creep behavior – Part 2: Flexural creep by three-point loading – Amendment 1
IEC 60 794-3-20:2016	Optical fibre cables – Part 3-20: Outdoor cables – Family specification for self-supporting aerial telecommunication cables
IEC 60794-4:2018	Optical fibre cables – Part 4: Sectional specification – Aerial optical cables along electrical power lines
IEC 60 794-5:2014	Optical fibre cables – Sectional specification – Microduct cabling for installation by blowing
Directive 2011/65/EU (RoHS II)	Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment — compliant. Applies within EU member states).
Directive (EU) 2015/863 (RoHS III)	Amending Directive 2011/65/EU to add four phthalates (DEHP, BBP, DBP, DIBP) to Annex II — compliant.
Directive 2008/98/EC (WFD)	Waste Framework Directive — compliant. Implemented in the UK through the Waste (England and Wales) Regulations 2011 (SI 2011 No. 988).
ECHA SCIP Database	Compliant; product does not contain SVHCs (Substances of Very High Concern) as defined under REACH Article 33(1). Submission obligations met under EU REACH and UK REACH.

# Excel Enbeam 24 Way Internal 5/3.5 mm Blowing Tube LS0H White

Part Code: 208-810

sales@excel-networking.com  
excel-networking.com

Regulation (EU) 2019/1021 (POPs)

EU Regulation on Persistent Organic Pollutants — compliant. For Great Britain, compliance is aligned with the Persistent Organic Pollutants (Amendment) (EU Exit) Regulations 2020 (SI 2020 No. 1355).

UK SI 2012 No. 3032

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (UK RoHS) — compliant for Great Britain. Retained EU law, as amended by the Product Safety and Metrology (Amendment etc.) (EU Exit) Regulations 2019.

## Part Code Table

Part Code	Description
208-805	Excel Enbeam 2 Way Internal 5/3.5 mm Blowing Tube LS0H White
208-806	Excel Enbeam 4 Way Internal 5/3.5 mm Blowing Tube LS0H White
208-807	Excel Enbeam 7 Way Internal 5/3.5 mm Blowing Tube LS0H White
208-808	Excel Enbeam 12 Way Internal 5/3.5 mm Blowing Tube LS0H White
208-810	Excel Enbeam 24 Way Internal 5/3.5 mm Blowing Tube LS0H White