

Excel Enbeam OM4 Multimode Blown Fibre EPFU Loose Tube 12 Fibre 50/125 Yellow

Item Code: 208-819

excel
without compromise.



- ✕ Bend insensitive
- ✕ Available in 4, 8 & 12-fibre bundles
- ✕ TIA-598-C Colour coded
- ✕ Gel free Dielectric design
- ✕ Coated for improving blowing performance
- ✕ 25 Year system warranty
- ✕ CIBSE TM65 Embodied Carbon: 0.014 kg CO2e

Product Overview

Enbeam OM4 Multimode Blown Fibre EPFU Loose Tube 12 Fibre 50/125 Yellow, part of a huge range of OM4 fibre optic cables fully stocked at Mayflex.

Enbeam Enhanced Performance Fibre Units (EPFU) are designed specifically for blown-fibre applications and are optimised for installation within our range of blown-fibre tubes.

The fibres are contained within a soft acrylate layer which cushions the fibres. This layer is coated with a hard layer for strength and finally a low-friction coating to ensure low drag and maximise blowing distances within the tubes.


The acrylate coatings are easy to remove to expose the 250-micron primary-coated fibres for quick splicing.

The fibres are colour-coded according to TIA-598-C.

Product Specifications

Feature	Values
Number of Cores	12
Fibre type	Multi mode 50/125
Category	OM4
Outer sheath colour	Yellow
Outer diameter approx.	1.65 mm
Blown system	yes

Product drawing

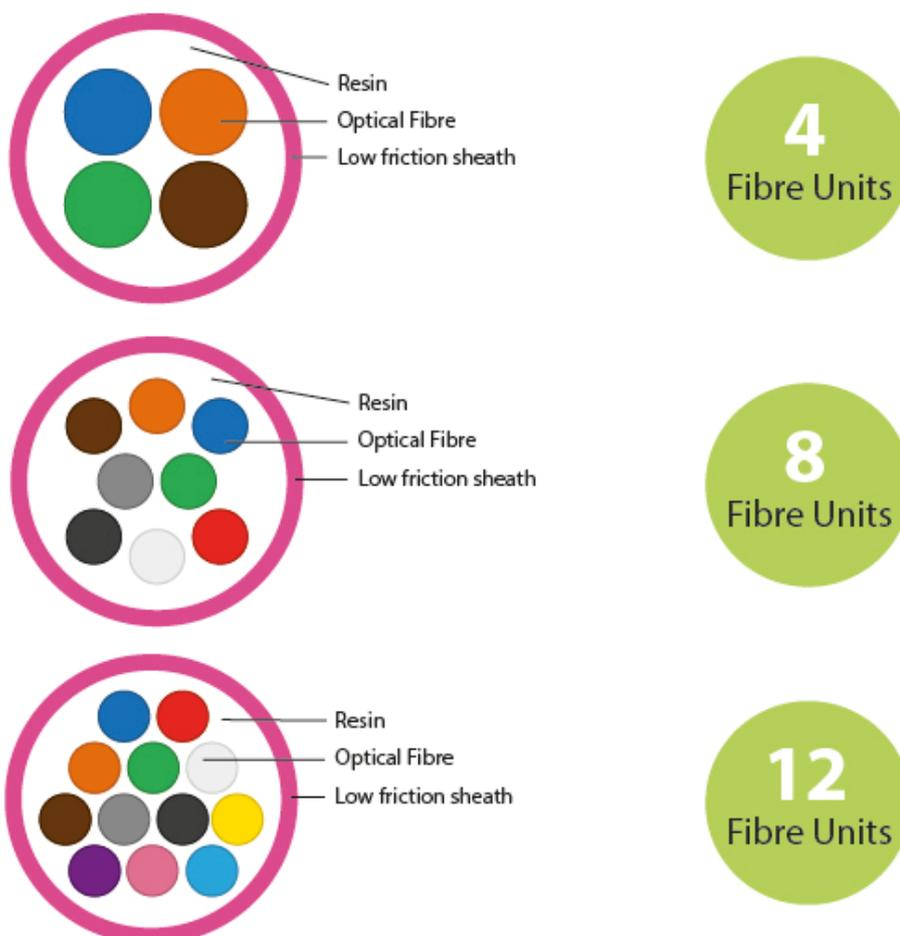

Cable specifications

Features		Values
Weight (kg/km)	4 Fibres	1.0±0.3
	8 Fibres	1.8±0.3
	12 Fibres	2.0±0.3
Tensile performance (N)	Short term	1*G
	Long term	0.3*G
Crush (N/100mm)	Short term	100
	Long term	50

Excel Enbeam OM4 Multimode Blown Fibre EPFU Loose Tube 12 Fibre 50/125 Yellow

Item Code: 208-819



Blowing test equipment		PLUMETTAZ: UltimaZ™
Standard duct		5.0/3.5mm
Pressure		12 bar
Typical blowing distance	4 Fibres	1000m
	8 Fibres	1000m
	12 Fibres	800m
Typical blowing time	4 Fibres	35 min
	8 Fibres	35 min
	12 Fibres	30 min
Temperature	Transportation and storage	-40°C to +70°C
	Installation	-5°C to +50°C
	Operation	-20°C to +70°C

Fibre specifications

Features		Values
Attenuation (before cabling)	@850nm	≤2.30 dB/km
	@1300nm	≤0.60 dB/km
Attenuation (after cabling)	@850nm	≤3.50 dB/km
	@1300nm	≤1.50 dB/km
Overfilled Modal Bandwidth	@850nm	≥3500 (MHz·km)
	@1300nm	≥500 (MHz·km)
Effective Modal Bandwidth	@850nm	≥4700 (MHz·km)
Numerical Aperture		0.200 ± 0.015 NA
Group Index of Refraction (typical)	@850nm	1.482
	@1300nm	1.477
Cladding Diameter		125.0±1.0µm
Cladding Non-circularity		≤1.0%
Core diameter		50 ± 2.5µm
Core non-circularity		≤5.0%
Core - Cladding Concentricity Error		≤1.0µm
Coating Diameter		245±7µm


Excel Enbeam OM4 Multimode Blown Fibre EPFU Loose Tube 12 Fibre 50/125 Yellow

Item Code: 208-819



Coating Non-circularity		≤6%
Coating – Cladding Concentricity Error		≤10μm
Zero Dispersion Wavelength, λ ₀		1295-1340nm
Zero Dispersion Slope	1295nm to 1310nm	≤0.105
	1300nm to 1320nm	0.000375 (1590·λ ₀)
Macro Bending Loss	100 turns, 30mm radius	≤0.5dB@850nm
		≤0.5dB@1300nm

Colour coding (as per TIA-598-C)

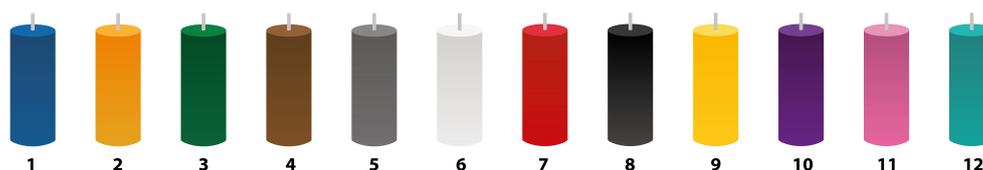

Standards

Applicable standard	Subject
ITU-T G.651.1:2018	Characteristics of a 50/125 μm multimode graded index optical fibre cable for the optical access network
ANSI/TIA/EIA 598-C	Optical Fibre Cable Colour Coding
IEC 60794-1-2:2017	Optical fibre cables - Part 1-2: Generic specification - Basic optical cable test procedures - General guidance
IEC 60068-2-38:2009	Environmental testing - Part 2-38: Tests - Test Z/AD: Composite temperature/humidity cyclic test
IEC 60794-5:2014	Optical fibre cables - Part 5: Sectional specification - Microduct cabling for installation by blowing
IEC 60794-5-10:2014	Optical fibre cables - Part 5-10: Family specification - Outdoor microduct optical fibre cables, microducts and protected microducts for installation by blowing
RoHS-II/III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive

Excel Enbeam OM4 Multimode Blown Fibre EPFU Loose Tube 12 Fibre 50/125 Yellow

Item Code: 208-819



SCIP: 2023

Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)

POPs (EU) No 2019/1021

EU Regulation for the restriction of Persistent Organic Pollutants.

Part Number Table

Part Number	Description
208-819	Excel Enbeam OM4 Multimode Blown Fibre EPFU Loose Tube 12 Fibre 50/125 Yellow
208-822	Excel Enbeam OM4 Multimode Blown Fibre EPFU Loose Tube 4 Fibre 50/125 Yellow
208-823	Excel Enbeam OM4 Multimode Blown Fibre EPFU Loose Tube 8 Fibre 50/125 Yellow

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.