

Excel Enbeam Pushfit Bulkhead Tube Connector for 5 mm Blown Fibre Tube

Item Code: 208-899



- ✕ Pushfit
- ✕ For use with 5mm tube
- ✕ UL94-V0
- ✕ CIBSE TM65 Embodied Carbon: 0.089 kg CO2e

Product Overview

The Enbeam Push-Fit bulkhead connector is designed for use with the Enbeam blown fibre micro duct system. The push fit Bulkhead is made from a black acetal co-polymer and can be mounted in a 12.5mm hole.

Product Specifications

Feature	Values
Model	Coupler

Additional specifications


Features	Values
Material	Acetal Co-Polymer
Pressure	16
UV Resistance	None
Operating temperature	-10°C to +40°C

Excel Enbeam Pushfit Bulkhead Tube Connector for 5 mm Blown Fibre Tube

Item Code: 208-899



Product drawing

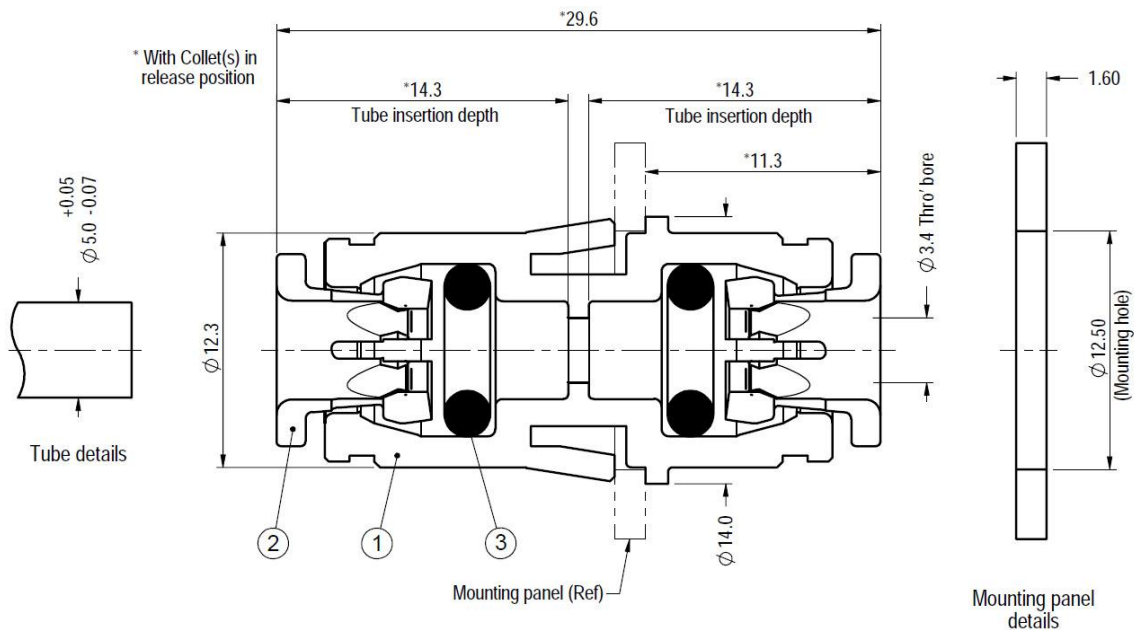

Standards

Applicable standard	Detail
BS EN 50411-2-8:2009	Fibre organisers and closures to be used in optical fibre communication systems. Product specifications. Microduct connectors, for air blown optical fibres, Type 1
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

Excel Enbeam Pushfit Bulkhead Tube Connector for 5 mm Blown Fibre Tube

Item Code: 208-899



Part Number Table

Part Number	Description
208-899	Excel Enbeam Pushfit Bulkhead Tube Connector for 5 mm Blown Fibre Tube

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.