# Excel Enbeam Pushfit Bulkhead Tube Connector for 5 mm Blown Fibre Tube

Item Code: 208-899





S /	Pushfit
- XV	Duchtit
AV.	PUSITION
	I GOLLING

X For use with 5mm tube

X UL94-V(

imes CIBSE TM65 Embodied Carbon: 0.089 kg CO2e

### **Product Overview**

The Enbeam Push-Fit bulkhead connector is designed for use with the Enbeam blown fibre micro duct system. The push fit Bulkhead is made from a black acetal co-polymer and can be mounted in a 12.5mm hole.

## **Product Specifications**

Feature	Values
Model	Coupler

## **Additional specifications**


Features	Values
Material	Acetal Co-Polymer
Pressure	16
UV Resistance	None
Operating temperature	-10°C to +40°C

# Excel Enbeam Pushfit Bulkhead Tube Connector for 5 mm Blown Fibre Tube

Item Code: 208-899





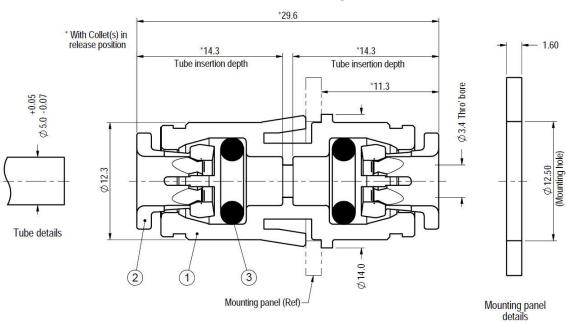

### **Standards**

	D
Applicable standard	Detail
BS EN 50411-2-8:2009	Fibre organisers and closures to be used in optical fibre communication systems. Product specifications. Microduct connectors, for air blown optical fibres, Type 1
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

# Excel Enbeam Pushfit Bulkhead Tube Connector for 5 mm Blown Fibre Tube

Item Code: 208-899



### **Part Number Table**

Part Number	Description
208-899	Excel Enbeam Pushfit Bulkhead Tube Connector for 5 mm Blown Fibre Tube

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.



Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.